

# CNC ROTARY TABLE SERIES





### NIKKEN KOSAKUSHO WORKS, LTD. OSAKA, JAPAN.

5-1, 1-chome, Minamishinden, Daito-shi, Osaka-fu, Japan. Telephone: 072-869-5820 Telefax: 072-869-6220

SHANGHAI ZHONG YAN TRADING CO., LTD. Building 1/f, #54, No.1089 Qinzhou Rd. (N), Shanghai, China U.S.A CA, CT, IL, NC, TX, WA LYNDEX-NIKKEN Inc P.R.CHINA 1468 Armour Boulevard, Mundelein, ILLINOIS 60060 Tel.+1-847-367-4800 Fax.+1-847-367-4815 Tel.+86-(0)-216210-2506 Fax.+86-(0)-216210-2083 HERRAMIENTAS LYNDEX-NIKKEN S.A.de C.V. Av. Hercules #401-13, Fracc. Poligono 3 Santa Rosa Jauregui, Queretaro 76220 Tel.+52-55-8421-8421 NIKKEN KOSAKUSHO ASIA PTE, LTD. 186, Woodlands Industrial Park E5 #04-01 M Singapore 757515 Tel.+65-6362-7980 Fax.+65-6362-7980 MEXICO (From 2014.09) SINGAPORE PROCOMO-NIKKEN S.A.S 6, avenue du 1er Mai-Z.A.E.Les Glaises 91127 **FRANCE** SIAM NIKKEN Co., LTD. **THAILAND** 127 Moo5 Gauwungsai-Bangturie Road Tambon Tanokkard Ampher Muangnakhonpathom Nakhonpathom 73000 Thailand Tel.+66(02)178-0503 Fax.+66(02)178-0504 Palaiseau Cedex Tel.+33-(0)-1-69.19.17.35 Fax.+33-(0)-1-69.30.64.68 NIKKEN KOSAKUSHO EUROPE LTD. UK PT.NIKKEN KOSAKUSHO INDONESIA

JALAN BIZPARK 3 JABABEKA INNOVATION CENTER A NO.16,
KEL.MEKARMUKTI, KEC. CIKARANG UTARA, KAB.
BEKASI PROP. JAWA BARAT **INDONESIA** Advanced Manufacturing Park, Brindley Way, Rotherham S60 5FS Tel.+44-(0)-1709-366306 Fax.+44-(0)-1709-376683 NIKKEN DEUTSCHLAND GMBH CARL-ZEISS-STRASSE 11 NEU-ULM 89231 Tel.+49-731-963397-0 Fax.+49-731-963397-60 **GERMANY** TEL:+62-(0)21-5702071 MAIL:zefry.i@nikken-kosakusho.co.jp

http://www.nikken-kosakusho.co.jp/ene-mail:export@nikken-kosakusho.co.jp

Please give your order to the following agent.

SCANDINAVIA SWEDEN

**ITALY** 

KOREA

NIKKEN SCANDINAVIA AB Malmövägen 14 331 42 Värnamo Sweden Tel.+46-(0)-303-440-600 Fax.+46-(0)-303-58177 UTILLAJES OLASA,S.L.

VEGA INTERNATIONAL TOOLS S.P.A Via Asti N · 9 10026-Santena(TORINO) Tel.+39-011-9497911 Fax.+39-011-9456380

**SPAIN &** C/ Alenas 3 - Nave 22 Pol. 27 (Mateo Gaina) 20014 Donostia - San Sebastián [Gipuzkoa] Tel.+34-(0)-943-107177 CUTTING TOOLS S.L **PORTUGAL** 

Tel.+34-(0)-902-820090 Fax.+34-(0)-902-820099 NIKKEN KESICI TAKIMLAR SAN. VE ULUSLARARASI TIC. A. S **TURKEY** 

E5 Uzeri Kucukyali Yanyol Irmak Sok. Kucukyali Sanayi Sitesi A Blok No:5 Maltepe 34852 Istanbul Tel.+90-(0)-216-518-1010 Fax.+90-(0)-216-366-1414

WOREA NIKKEN LTD.

90B-11L, Namdong Industrial Complex, 170,
Namdong-Daero, Namdong-Gu, Incheon, Korea 405-819
Tel.+82-(0)-32-763-4461 Fax.+82-(0)-32-763-4464

D.TI.1

Specifications are subject to change without notice

# Made in Japan, Made by

NIKKEN is the manufacturers of CNC rotary tables that designs and manufactures in-house the key components of its rotary tables in order to realize the exceptional performance for customer requirements.

### ■Spirit of Innovation In pursuit of exceptional performance

Our name "NIKKEN" means "Doing research & study every day", and this expresses the spirit of our company. This spirit is alive in every component of our CNC rotary tables. To achieve unmatched high precision, high rigidity, and durability, we utilize a variety of key components incorporating our own innovative ideas, rather than relying on off-the-shelf parts.

### Long Life Concept In-house design and manufacturing for secure environment

Although our products are highly durable, it is naturally to replace parts occasionally. Since the key components are manufactured in-house, our customers avoid the risk of not being able to perform product repairs due to being discontinued off-the-shelf parts. You can continue to rely on our high-precision products under secure environment over the long term.

#### The Heart of NIKKEN CNC Rotary Table

#### Carbide Worm Screw System •



#### Carbide Worm Screw

Carbide worm screw (Material: V grade carbide), hard and strong against high speed rotation, is used with ultra heavy duty, maintaining the high accuracy semi-permanently.


Comparing with the traditional worm system (steel worm screw and phosphor/aluminum bronze worm wheel), wearing of worm wheel is largely reduced

and rotary table can be used for longer years, resulting in great cost-down. For better impact capability, the special alloy steel worm screw is used for the worm system of the small tooth module.




#### Harden Worm Wheel

The material used for the NIKKEN worm wheel is custom made steel, specially hardened and ion-nitrided on the teeth to eliminate the friction and gear wear.



Unique "Bearing system"

### Independent Double Thrust and Radial Bearing System ●



NIKKEN bearing system allow for more points of contact versus conventional cross roller bearings, resulting in smooth and accurate rotation.

#### ■Thrust:Tubular Roller Bearings

Tubular thrust bearings are pre-loaded for rigidity, and dampen vibration.

#### ■ Radial: Needle Roller Bearings


"Hand picked and matched" needle roller bearings between rotary table body and table spindle are implemented for the high accuracy and rigidity.

## NIKKEN.






Our thoroughgoing passion for high rigidity and high precision results in products of excellent durability that retain their precision even after long-term use. This boosts the operating ratio and cuts maintenance costs, contributing to a substantial reduction in costs overall.

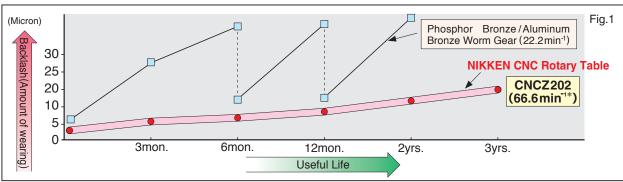


\*It is the value of motor 3,000min<sup>-1</sup>.

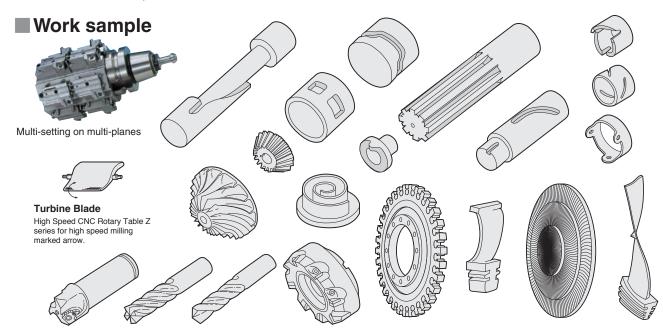


### NIKKEN CNC rotary table extensive





<u>COMPACT</u> P7 - P10 CNC105, 180, 202, 205






LARGE P15 - P16 CNC1000, 1200,1201, 1600



CNC202T, 260T, 302T 321T, 401T, 501T, 601T



ACK SIDE MOTOR MOUNTED P21 - P22 CNC180B, 202B, 260B 302B, 321B, 401B



BIG BORE P23 - P24 CNCB350, B450, B630



MULTI-SPINDLE P25 - P26 CNC100-2W, 3W, 4W, 180-2W, 202-2W, 260-2W





COMPACT P27 - P32 NCT200, NCT200E




**RED 200,** 300, 400, 500, **5AX-RED** 











### **NIKKEN**

## lineup to match your own applications.





COMPACT P37 - P40 5AX-100, 130, 201



STANDARD P41 - P44 5AX-230, 250, 350, 550



LARGE P45 - P46 5AX-800, 1200



ALTI-SPINDLE P47 - P48

5AX-2MT-105,


4MT-105













**SERVO MOTOR** 

SERVO MOTOR P57 - P58

Servo Motor List • Relation between Unbalancing load and Servo Motor • Flow Chart of the Additional Axis Control

AR21 CONTROLLR P59 - P68

TECHNICAL INFORMATION P69 - P70

# M-SIGNAL ROTARY TABLE with NIKKEN CONTROLLER

### 

	& POWER CHUCK · · · · · · P75 - P76 ICE and T-NUT · · · · P77 - P76	6
Accuracy Stand Description of Specific Assessment Load Calculation,	TECHNICAL INFORMATION    ard	
iecnnicai intori	mation···· P101	

O/P	OPTIONAL EQUIPMENT					
High precision Indexing (Full Closed Loop) Ultra- High precision Indexing (Full Closed Loop)  ROTARY JOINT P81 – P84  Multi Jig Fixture Holder System P85 – P90  Waterproof Specification P91  Special application support case P92 – P94						
SERV	WORLDWIDE NETWORK					
Overseas Sales Worldwide Sale WormgearState	& Service Network					

### **How to Select Your Best CNC Rotary Table**




### 1 How CNC Rotary Table is Controlled

#### Additional Axis

You can choose additional axis when the machine has 4th or 5th axis.

CNC rotary table can be controlled by machine in this case.

- 4th or 5th amplifier is required for the machine. It should be used exactly the same one used for X, Y and Z axis. Install same type of servomotor(s) used for X, Y and Z axis.
- The capacity of the servomotor or amplifier is defined by the types of rotary table.
- 3. Decide who supplied the servomotor.
- External dimensions and specifications depend on the type of servomotor.
- Parameter configuration, hydraulic connection, wiring and installation of amplifiers should be provided by machine tool builders.

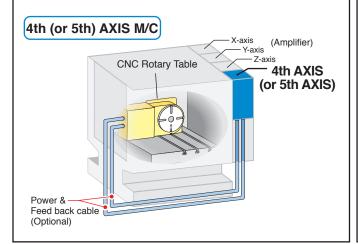


#### NIKKEN Controller (M-signal)

You can choose NIKKEN Controller when the machine doesn't have additional axis.

Note: at least one M-signal code is required.


- 1. At least one M-Signal is required on the machine.
- Input M-signal as "index start" command on the machine, high accuracy indexing, equally divided indexing (2-9999), or lead operation is allowed.
- Control unit, servo-motor and all cables will be supplied by NIKKEN




### 2 Select +1 AXIS or +2 AXIS



### **3** Select Face Plate Diameter




### 4 Select the Servomotor Position 🚨 🦺 🚨 互 High Speed or Standard?














8 Icon list (In this catalog, table Specifications, accessories, and opion are displayed as icons.)




### **How to Read Product Code**




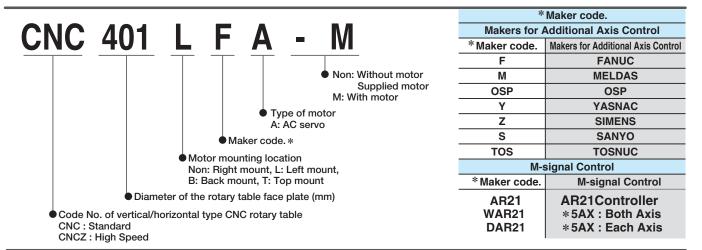

Servomotors for Brother **SPEEDIO** is exclusive. EX.)NCT □ 200 □ SA-BR3 The last part of the product code must be "SA-BR3".

Code No. of Rotray & Tilting Table

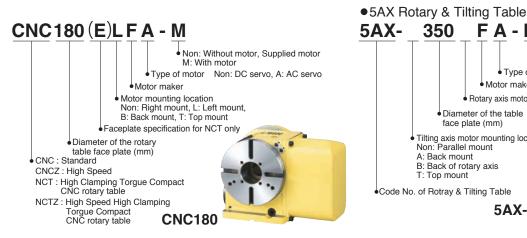

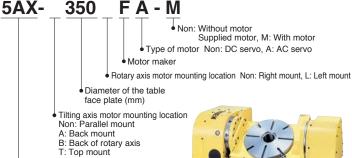


5AX-350


# CNC100-2W-120 F A-M

Multi-Spindle CNC Rotary Table

Non: Without motor Supplied motor, M: With motor Type of motor Non: DC servo, A: AC servo Motor mounting location Non: Right mount, L: Left mount, B: Back mount, T: Top mount Pitch between the spindles 120, 250, 320 Number of spindles Diameter of the rotary table face plate (mm) Code No. of vertical/horizontal type CNC rotary table CNC100-2W

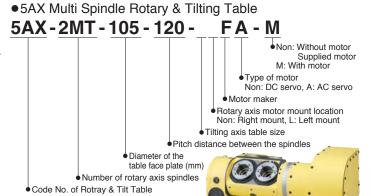

Rotary Hirth Coupling Index Table



Manual Tilting CNC Rotary Table

5AX-2MT-105



### **COMPACT CNC ROTARY TABLE**





CNC105 and accessories

- Wide application can be offered from small drilling press to M/C
- Suitable for indexing/leads cutting of small size work pieces
- Various kinds of the work chucking attachments can be offered from 5C collet fixtures to the air/hyd. chuck

# ADD. ACCURACY SPEC. JOINT PRECISIO TABLE STOCK CHUCK CHUCK CHUCK CHUCK DEVICE T-NUT DEVICE TO STOCK CHUCK DEVI

#### Specifications

#### ( ):High Speed CNC ROTARY Table Z series

Item / Code No.		CNC105 CNCZ105	CNC180 CNCZ180	CNC202 CNCZ202
Diameter of Ta	able	105	180	200
Diameter of S	pindle Hole	Ф60н7 Ф30	Ф60н7 Ф40	Ф60н7 Ф40
Center Height	mm	105	135	135
Width of T Slo	t mm	Ф10H7 Pin hole	12 +0.018	12 +0.018
Clamping Sys	tem	Pneumatic*3	Pneumatic*3	Pneumatic*3
Clamping Tord	que N·m	205	303	303
Table Inertia at M	otor Shaft $(\frac{GD^2}{4})$ kg·m <sup>2</sup> ×10 <sup>-3</sup>	0.06	0.08	0.09
Servo Motor	r/min	αiF1·3000	α iF2·3000	αiF4•3000
MIN. Increme	nt	0.001°	0.001°	0.001°
Rotation Spee	ed*4 r/min	33.3(66.6)	33.3(66.6)	33.3(66.6)
Total Reduction	on Ratio	1/90(1/45)	1/90(1/45)	1/90(1/45)
Indexing Accu	racy sec	±30	±20	±20
Net Weight	kg	32	45	55
MAX. Work Load	Vertical kg	30	100	100
on the Table	Horizontal kg	60	200	200
MAX.	N N	8800	18000	18000
Thrust Load applicable on the	*1 F×L N·m	275	542	542
Table	FXL N·m	220	690	690
Guide Line of MAX. Unbalancing Load	*2 N·m	-	30	50
MAX. Work Inertia	Vertical $(\frac{GD^2}{4})$ kg·m²	0.04(0.02)	0.4(0.2)	1.0(0.5)
Driving Torque	N·m	36(27)	72(54)	144(115)

<sup>\*1</sup> This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.

<sup>\*2</sup> The guide line of MAX unbalancing load means the unbalancing load, when the rotary table is used with support table in vertical application. The guide line figure will be different according to the servo motor, please refer to FF P.57 for more detail.

<sup>\*3</sup> Air Intensifying Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. 🖅 P.91

<sup>\*4</sup> The table rotation speed when the motor rotates at 3000r/min. Depending on the application(unbalance of the jig,work) and the motor specification, the motor may not be able to rotate at 3000r/min. ★ α iF4/5000 motor can be mounted on CNC180.

<sup>★</sup>Driving torque means the torque at MAX. rotation speed after acceleration. Driving torque is almost constant and independent from the load except unbalancing load is applied.




## CNC105, 180, 202





External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### **CNC105, CNCZ105**






















Air purge function is provided inside the motor cover as standard.

### CNC180, CNCZ180






















Air purge function is provided inside the motor cover as standard.

### **CNC202, CNCZ202**



















Air purge function is provided inside the motor cover as standard.

### **COMPACT CNC ROTARY TABLE**





Ultra Slim Model for Trunnion Application

### **CNC205**



### 380Nm

Air-hydraulic Unit Provided as Standard Equipment

Astoundingly powerful clamping capability in spite of the slim body

For machines with no hydraulic power source, the air-hydro unit provides powerful hydraulic supply functionality using only an air supply. In spite of its slim body, it delivers an astounding 380 Nm of clamping power, enabling a variety of applications, such as use of a cradle jig.

### **Ultra-Slim 98mm**

Ultrathin Specification to Maximize Machining Space

Demonstrates the true worth of a compact machining center with limited machining space.

The body thickness of 98mm is 54mm slimmer than previous models. Allows enlargement of the cradle jig work mounting area on machines with limited machining space, such as the BT30 compact machining center.

## High Speed

Z Type is also Available

Reducing cycle time enhances productivity

The lineup also includes the highly rotatable Z type that further reduces machining cycle time. By setting the speed reduction ratio to 1/2 that of the standard type, 200% speedup is achieved.

## **Built-in Rotary Joint**

**Supports Mounting of Built-in Rotary Joints** 


Automated component mounting/unmounting with minimal increase in size.

The rotary table body is already provided with IN ports, so the rotary joint specification can be changed with minimal increase in the body dimensions.

### **Ultra-slim Support**

Ultrathin Support Table is also Available.

Contributes to a further expansion of machining area when used with the CNC205.



Ultrathin Support Table with Clamping System

Ex.)
Trunnion Application with
CNC205L and a Support Table






## **CNC205**





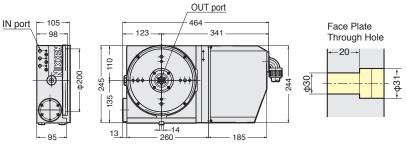

Rotary joint shown in photo is optional.

\*Rotary joint is included in the layout with AR21 controller.

### Specifications

Item	/ Code No.	Standard	High Speed	
Right Hand M	Nounted Moter	CNC205	CNCZ205	
Left Hand Mo	ounted Moter	CNC205L	CNCZ205L	
Diameter of Ta	ble ¢mm	200	200	
Diameter of Sp	oindle Hole	Ф30н7	Ф30н7	
Center Height	mm	135	135	
Width of T Slot	: mm		_	
Clamping Syst	em	Air Hydraulic Booster Built-in type	Air Hydraulic Booster Built-in type	
Clamping Torq		380	380	
Table Inertia at N	Motor Shaft $(\frac{GD^2}{4})$ kg·m <sup>2</sup> ×10 <sup>-3</sup>	0.15	0.15	
Servo Motor	r/min	α iF2•3000	α iF2•3000	
MIN. Incremen		0.001°	0.001°	
Rotation Speed	d*3 r/min	33.3	66.6	
Total Reduction	n Ratio	1/90	1/45	
Indexing Accur	acy sec	±20	±20	
Net Weight	kg	45	45	
MAX. Work Load	Vertical kg	100 (with suppart)	100 (with suppart)	
on the Table	Horizontal kg	_	_	
MAX. Thrust Load	*1 FXL N·m	670	670	
applicable on the Table	FXL N·m	690	690	
Guide Line of MAX. Unbalancing Load	*2 N·m	30	30	
MAX. Work Inertia	Vertical $ \sqrt[4]{\frac{GD^2}{4} + \left(\frac{GD^2}{4}\right) \text{ kg·m}^2} $	0.40	0.20	
Driving Torque	N·m	72	54	

<sup>\*1</sup> This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.

<sup>\*2</sup> The guide line of MAX unbalancing load means the unbalancing load, when the rotary table is used with support table in vertical application. The guide line figure will be different according to the servo motor, please refer to ## P.57 for more detail.

<sup>\*3</sup> The table rotation speed when the motor rotates at 3000r/min. Depending on the application(unbalance of the jig,work) and the motor specification, the motor may not be able to rotate at 3000r/min.

<sup>★</sup>Driving torque means the torque at MAX. rotation speed after acceleration. Driving torque is almost constant and independent from the load except unbalancing load is applied.

### STANDARD CNC ROTARY TABLE





- The rotary table can be used vertically or horizontally depending on the application
- Best match for a medium-size machining center
- Standard model with motors mounted on the body side

Option Accessories ACCURACY ROTARY **POWER** T-NUT **AXIS** TABLE SPEC. **JOINT** STOCK CHUCK DEVICE P.57 P.81 P.79 P.76 P.78

### Specifications

#### ( ):High Speed CNC ROTARY Table Z series

Iter	Item / Code No.		CNC260 CNCZ260	CNC260P CNCZ260P	CNC302*3 CNCZ302	CNC302P CNCZ302P	CNC321*3 CNCZ321	CNC401 CNCZ401
Diameter of Ta	able ¢	mm	260	260	300	300	320	400
Diameter of S	pindle Hole ¢	mm	ф80н7	ф80н7	ф80н7	ф80н7	ф105н7	ф105н7
Center Height		mm	170	170	170	170	230	230
Width of T Slo	ot	mm	12 +0.018	12 +0.018	12 +0.018	12 +0.018	12 +0.018	14 <sup>+0.018</sup>
Clamping Sys	tem <sup>*5</sup>		Hydraulic	Pneumatic	Hydraulic	Pneumatic	Hydraulic	Hydraulic
Clamping Tore	que	N·m	1568	1430	1568	1430	1760	1760
Table Inertia at M	lotor Shaft $\left(\frac{GD^2}{4}\right)$ kg·m <sup>2</sup>	<10 <sup>-3</sup>	0.33	0.33	0.33	0.33	2.8	2.8
Servo Motor	r/	min /	αiF4•3000	αiF4•3000	αiF4•3000	αiF4•3000	αiF12•2000	αiF12•2000
MIN. Increme	nt		0.001°	0.001°	0.001°	0.001°	0.001°	0.001°
Rotation Spee	ed*4 r/	min /	25.0(50.0)	25.0(50.0)	25.0(50.0)	25.0(50.0)	22.2(44.4)	22.2(44.4)
Total Reduction	on Ratio		1/120(1/60)	1/120(1/60)	1/120(1/60)	1/120(1/60)	1/90(1/45)	1/90(1/45)
Indexing Accu	ıracy	sec	20	20	20	20	15	15
Net Weight		kg	115	115	120	120	200	230
MAX. Work Load	Vertical	kg	175	175	175	175	250	250
on the Table	Horizontal	kg	350	350	350	350	500	500
MAX.		N	42480	42480	42480	42480	53100	53100
Thrust Load applicable	*1	F×L N·m	1442	1442	1442	1442	2648	2648
on the Table	F L	F×L N·m	2320	2320	2320	2320	3840	3840
Guide Line of MAX. Unbalancing Load	*2	N·m	50	50	50	50	100	100
MAX. Work Inertia	Vertical $\int \frac{GD^2}{4} + \left(\frac{GD^2}{4}\right) k$	g·m²	3.2(1.6)	3.2(1.6)	3.2(1.6)	3.2(1.6)	6.4(3.2)	6.4(3.2)
Driving Torque		N·m	192(153)	192(153)	192(153)	192(153)	432(345)	432(345)

- \*1 This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.
- \*2 The guide line of MAX unbalancing load means the unbalancing load, when the rotary table is used with support table in vertical application. The guide line figure will be different according to the servo motor, please refer to FF P.57 for more detail.
- \*3 CNC302,321 is semi-standard model. \*4 The table rotation speed when the motor rotates at 3000r/min. Depending on the application(unbalance of the jig,work) and the motor specification, the motor may not be able to rotate at 3000r/min.
- \*5 The air brake version of the existing CNC260(302) has been discontinued, so please select the new CNC260P(302P).
- ★The air-hydraulic booster is available, when the rotary table with hydraulic clamping system is used on the M/C without hydraulic source, please refer to **FP.91**.
- ★ XiF8/4000 motor can be mounted on CNC260, 302, CNC260P, 302P.
- ★Driving torque means the torque at MAX. rotation speed after acceleration. Driving torque is almost constant and independent from the load except unbalancing load is applied.




### CNC260, 260P, 302, 302P, 321, 401




External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### CNC260, CNCZ260, CNC302, CNCZ302
















):Figures is for CNC302, CNCZ302.


### CNC260P, CNCZ260P, CNC302P, CNCZ302P







Powerful Clamping Torque:1430N·m













):Figures is for CNC302P.


Air purge function is provided inside the motor cover as standard.

### CNC321, CNCZ321



















Rotary joint shown in layout is optional.


### CNC401, CNCZ401

Rotary joint shown in photo & layout is optional.


















### STANDARD CNC ROTARY TABLE





- Dividing and lead cutting for large size work piece is suitable
- Large through hole and powerful clamping system
- Ideal for deep cutting of highly rigid material

Option

ADD. ACCURACY AXIS SPEC. P.57 P.95

















### Specifications

Iten	n / Code No.	CNC501	CNC601	CNC803	CNC1003
Diameter of Table ¢mm		500	600	800	1000
Diameter of S	pindle Hole	Ф130н7	Ф130н7	Ф230н7	Ф230н7
Center Height	mm	310	310	550	550
Width of T Slo	t mm	14 +0.018	14 +0.018	22H7*3	22H7*3
Clamping Sys	tem	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Clamping Tord	que N·m	4655	4655	7000	7000
Table Inertia at M	otor Shaft $(\frac{GD^2}{4})$ kg·m <sup>2</sup> ×10 <sup>-3</sup>	6.8	4.9	6.2	6.3
Servo Motor	r/min	αiF12•2000	αiF12•2000	αiF30•2000	αiF30•2000
MIN. Incremer	nt	0.001°	0.001°	0.001°	0.001°
Rotation Spee	d r/min	16.6	11.1	5.5	5.5
Total Reduction	on Ratio	1/120	1/180	1/360	1/360
Indexing Accu	racy sec	15	15	15	15
Net Weight	kg	470	500	2070	2210
MAX. Work Load	Vertical kg	400	400	2000	2000
on the Table	Horizontal kg	800	800	4000	4000
MAX.	N	150000	150000	281250	281250
Thrust Load applicable	*1 FXL N·m	5709	5709	20067	20067
on the Table	FXL N·m	16650	16650	42190	42190
Guide Line of MAX. Unbalancing Load	*2 N·m	200	200	300	300
MAX. Work Inertia	Vertical $(\frac{GD^2}{4})$ kg·m²	19.4	37	234	234
Driving Torque	N·m	576	864	3168	3168

<sup>\*1</sup> This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.

<sup>\*2</sup> The guide line of MAX unbalancing load means the unbalancing load, when the rotary table is used with support table in vertical application. The guide line figure will be different according to the servo motor, please refer to P.57 for more detail.

<sup>\*3</sup> Standard large rotary tables are without T slot. T slot is available as an option, please specify the width of the T slot.


<sup>★</sup>Total reduction ratio of 1/180 is also available for CNC501. ★ αiF22/4000 motor can be mounted on CNC501, 601.


### CNC501, 601, 803, 1003



External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### **CNC501**

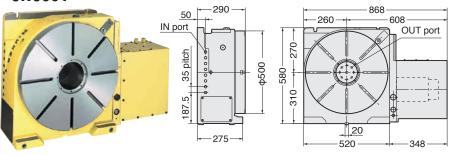














Rotary joint shown in layout is optional.

### **CNC601**



















Rotary joint shown in layout is optional.

### **CNC803**

















### **CNC1003**





#### **CNC803B**

CNC803 : the servomotor is mounted at back side, suitable for the application for pallet on Horizontal machines.









### **LARGE CNC ROTARY TABLE**





- Ideal for indexing and lead cutting of large work pieces
- Tooth thickness module 10 and ultrahigh rigidity among best in class.(CNC1600)
- Ideal for aircraft- and energy-related parts

	Ont	ion —			
ADD. AXIS	ACCURACY SPEC.		ULTRA PRECISIO	SUPPORT TABLE	TAIL
P.57	P.95	P.81	P.79	P.71	P.73



CLAMP DEVICE

P.76

## T-NUT

### Specifications

#### The specification will be varied according to your application. Please contact us.

Iter	n / Code No.	CNC1000*1	CNC1200*1	CNC1201*1	CNC1600*1
Diameter of Table ¢mm		1000	1200	1200	1600
Diameter of Spindle Hole *2 \$\phi\$mm		Ф300н7	Ф300н7	Ф300н7	Ф400н7
Center Height	t mm	Horizontal	Horizontal	650	850
Width of T Slo	ot *3 mm	22H7*3	22H7*3	22H7*3	28H7*3
Clamping Sys	tem	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Clamping Tor	que N·m	18000	18000	18000	35000
Servo Motor	r/min	αiF22	2•2000	αiF30•200	00
MIN. Increme	nt	0.001°	0.001°	0.001	0.001
Rotation Spec	ed r/min	5.5	5.5	2.7	2.7
Total Reduction	on Ratio*4	1/360	1/360	1/720	1/720
Indexing Accu	iracy sec	15	15	15	15
Indexing Accur	acy of Ultra Precision sec	±3	±3	±3	±3
Net Weight	kg	1700	1850	3500*5	5250 *5
MAX. Work Load	Vertical kg			6500	10000
on the Table	Horizontal kg	7000	7000	13000	30000
MAX.	N N	281250	375000	1333330	2000000
Thrust Load applicable on the Table	*6 FXL	24080	24080	79025	111952
on the rable	F×L N·m	42190	67500	240000	510000
MAX. Work Inertia	Vertical kg·m²	1300	1300	2300	6400
Driving Torque	N·m	3168	3168	8640	8640

<sup>\*1</sup> CNC1000, 1200, 1600 is semi-standard model.

<sup>\*2</sup> The diameter of the spindle hole is restricted for the ultra precision type with Heidenhain rotary encoder.

\*3 Standard large rotary tables are without T slot. T slot is available as an option, please specify the width of the T slot.

<sup>\*4</sup> Total reduction ratio and motor can be changed according to your application, please contact us.

\*5 Net weight of the rotary table is for horizontal application. The weight of the back support for vertical application is not included.


\*6 This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.

### CNC1000, 1200, 1201, 1600



270


External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

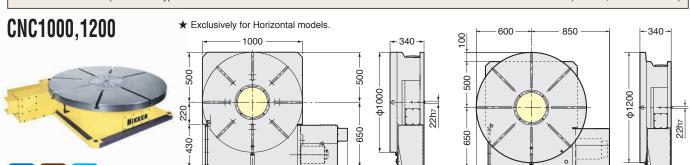


100

### CNC1201 PAT.







270


150







★ Please contact us about the back support for vertical use.

### **CNC1600** PAT.







Strong support mechanism that

suppresses worm screw









★ Please contact us about the back support for vertical use.

### **Application of the Large Rotary Table**

Machining of the gears with large module







Hobbing of the gears with large module



Configuration of the large rotary table on the horizontal M/C to machine a propeller hub of the windmill.

### TOP SIDE MOTOR MOUNTED CNC ROTARY TABLE






Ideal for automation of small parts by mounting of jig holder

Also ideal for B-axis of generalpurpose horizontal machining center. Figure at right shows example of pallet mounting.

Please specify A, B, C, D and E.



ADD. AXIS P.57

















### Specifications

Specifications							
Iter	m / Code No.	CNC202T	CNC260T	CNC302T *4			
Diameter of T	able	200	260	300			
Diameter of S	pindle Hole	ф60н7 ф40	ф80н7	ф80н7			
Center Height	t mm	150	170	170			
Width of T Slo	ot mm	12 +0.018	12 +0.018	12 +0.018			
Clamping Sys	stem	Pneumatic*3	Pneumatic*3 / Hydraulic	Pneumatic*3 / Hydraulic			
Clamping Tor	que N·m	303	588 / 1568	588 / 1568			
Table Inertia at I	Motor Shaft $(\frac{GD^2}{4})$ kg·m <sup>2</sup> ×10 <sup>-3</sup>	1.0	1.5	1.5			
Servo Motor	r/min	αiF4•3000	αiF4•3000	αiF4•3000			
MIN. Increme	nt	0.001°	0.001°	0.001°			
Rotation Spec	ed*5 r/min	25.0	25.0	25.0			
Total Reduction	on Ratio	1/120	1/120	1/120			
Indexing Accu	iracy sec	±20	20	20			
Net Weight	kg	70	160	165			
MAX. Work Load	Vertical kg	100	175	175			
on the Table	Horizontal kg						
MAX.	F N	18000	42480	42480			
Thrust Load applicable on the	*1 FXL N·m	542	1442	1442			
Table	FXL N·m	690	2320	2320			
Guide Line of MAX. Unbalancing Load	*2 N·m	50	60	60			
MAX. Work Inertia	Vertical $(\frac{GD^2}{4}) \text{ kg·m}^2$	1.0	3.2	3.2			
Driving Torque	N·m	192	192	192			

- \*1 This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.
- \*2 The guide line of MAX unbalancing load means the unbalancing load, when the rotary table is used with support table in vertical application. The guide line figure will be different according to the servo motor, please refer to #P.57 for more detail.
- \*3 Air Intensifying Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. 🖙 P.91 \*4 CNC302T is semi-standard model.


### CNC202T, 260T, 302T





External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### CNC202T













Air purge function is provided inside the motor cover as standard.


### CNC260T















For the rotary table with pneumatic clamping, air purge function is provided inside the motor cover as standard.


### CNC302T



Center socket shown in photo is optional.













For the rotary table with pneumatic clamping, air purge function is provided inside the motor cover as standard.

### Specification of the Top Side Mounted CNC Rotary Table



Photo with CNC302T without T slot.



Synchronors movement of 2 off CNC401T

Tubular roller bearing is installed against the thrust load. Therefore, when 2 rotary tables are faced on both side to synchronise movement, the system can be run without affecting the heat expansion of the rotary table.



CNC401T is installed on the pallet of the horizontal M/C.



CNC401T is installed on CNC600.



CNCB450T is used for the tilting axis table of 5AX-tilting rotary table.

### TOP SIDE MOTOR MOUNTED CNC ROTARY TABLE






Ideal for automation of small parts by mounting of jig holder

Also ideal for B-axis of generalpurpose horizontal machining center. Figure at right shows example of pallet mounting.

Please specify A, B, C, D and E.



ADD. AXIS P.57















#### Specifications

Specifications							
Iter	m / Code No.	CNC321T*3	CNC401T	CNC501T	CNC601T		
Diameter of Table ¢mm		320	400	500	600		
Diameter of S	pindle Hole	ф105н7	ф105н7	ф130н7	ф130н7		
Center Height	t mm	240	240	310	310		
Width of T Slo	ot mm	12 +0.018	14 +0.018	14 +0.018	14 +0.018		
Clamping Sys	tem	Hydraulic	Hydraulic	Hydraulic	Hydraulic		
Clamping Tor	que N·m	1760	1760	4655	4655		
Table Inertia at I	Motor Shaft $(\frac{GD^2}{4})$ kg·m <sup>2</sup> ×10 <sup>-3</sup>	2.0	2.0	9.0	8.8		
Servo Motor	r/min	αiF12•2000	αiF12•2000	αiF22•2000	αiF22•2000		
MIN. Increme	nt	0.001°	0.001°	0.001°	0.001°		
Rotation Spee	ed r/min	16.6	16.6	16.6	11.1		
Total Reduction	on Ratio	1/120	1/120	1/120	1/180		
Indexing Accu	iracy sec	15	15	15	15		
Net Weight	kg	220	245	495	525		
MAX. Work Load	Vertical kg	250	250	400	400		
on the Table	Horizontal kg						
MAX.	N N	53100	53100	150000	150000		
Thrust Load applicable	*1 FXL N·m	2648	2648	5709	5709		
on the Table	FXL N·m	3840	3840	16650	16650		
Guide Line of MAX.  Jnbalancing Load	*2 N·m	100	100	200	200		
MAX. Work Inertia	Vertical $(\frac{GD^2}{4}) \text{ kg·m}^2$	8.0	8.0	19	37		
Driving Torque	N·m	576	576	576	864		

\*3 CNC321T is semi-standard model.

<sup>\*1</sup> This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.
\*2 The guide line of MAX unbalancing load means the unbalancing load, when the rotary table is used with support table in vertical application.
The guide line figure will be different according to the servo motor, please refer to 🞏 P.57 for more detail.

<sup>★</sup> αiF22/4000 motor can be mounted on CNC321T, 401T.

<sup>★</sup>Total reduction ratio of 1/180 is also available for CNC501T.



## CNC321T, 401T, 501T, 601T





External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).


### **CNC321T**














Rotary joint shown in layout is optional. In ports are located in back side.

### **CNC401T**










★ Built-in type rotary joint can be mounted on CNC401 refer \$\simp\$P.89


Center socket shown in photo is optional. In ports are located in back side.

### CNC501T











Rotary joint shown in layout is optional. In ports are located in back side.


### CNC601T











In ports are located in back side.

### BACK SIDE MOTOR MOUNTED CNC ROTARY TABLE **NIKKEN**





CNC260B

- Suitable for the machine which does not have so wide space for Y axis, such as the gantory type M/C or the M/C with sprash guard
- Also compatible with rotary joints
- Select among pneumatic, hydraulic, and air-hydro clamping systems



#### **Specifications**

Item / Code No.		CNC180B	CNC202B	CNC260B	CNC302B*4	CNC321B*4	CNC401B	
Diameter of T	able	фтт	180	200	260	300	320	400
Diameter of S	pindle Hole	фтт	ф60н7 ф40	ф60н7 ф40	ф80н7	ф80н7	ф105н7	ф105н7
Center Height		mm	180	180	170	170	230	230
Width of T Slo	ot	mm	12 <sup>+0.018</sup>	12 +0.018	12 <sup>+0.018</sup>	12 <sup>+0.018</sup>	12 +0.018	14 <sup>+0.018</sup>
Clamping Sys	tem		Pneumatic*3	Pneumatic*3	Pneumatic*3 / Hydraulic	Pneumatic*3 / Hydraulic	Hydraulic	Hydraulic
Clamping Tor	•	N·m	303	303	588/1568	588/1568	1760	1760
Table Inertia at I	Motor Shaft $\left(\frac{GD^2}{4}\right)$	) kg·m²×10 <sup>-3</sup>	0.4	0.4	1.7	1.8	7.0	7.0
Servo Motor		r/min	αiF2•3000	αiF4•3000	αiF4•3000	αiF4•3000	αiF12•2000	αiF12•2000
MIN. Increme	nt		0.001°	0.001°	0.001°	0.001°	0.001°	0.001°
Rotation Spee	ed <sup>*5</sup>	r/min	33.3	33.3	25.0	25.0	22.2	22.2
Total Reduction	on Ratio		1/90	1/90	1/120	1/120	1/90	1/90
Indexing Accu	ıracy	sec	±20	±20	20	20	15	15
Net Weight		kg	56	60	145	150	240	270
MAX. Work Load	Vertical	kg	100	100	175	175	250	250
on the Table	Horizontal	kg			_			
MAX.	F	N	18000	18000	42480	42480	53100	53100
Thrust Load applicable on the	*1	FXL N·m	542	542	1442	1442	2648	2648
Table		F×L N·m	690	690	2320	2320	3840	3840
Guide Line of MAX. Unbalancing Load	*2	N·m	30	50	50	50	100	100
MAX. Work Inertia	Vertical	$(\frac{GD^2}{4})$ kg·m²	0.4	1.0	3.2	3.2	6.4	6.4
Driving Torque		N·m	72	144	192	192	432	432

- \*1 This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.
- \*2 The guide line of MAX unbalancing load means the unbalancing load, when the rotary table is used with support table. The guide line figure will be different according to the servo motor, please refer to FP.57 for more detail.
- \*3 Air Intensifying Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. 🖙 P.91
- \*4 CNC302B, CNC321B is semi-standard model.
- \*5 The table rotation speed when the motor rotates at 3000r/min. Depending on the application(unbalance of the jig,work) and the motor specification, the motor may not be able to rotate at 3000r/min.
- ★ αiF4/5000 motor can be mounted on CNC180B. ★ XiF8/4000 motor can be mounted on CNC260B, 302B.
- ★The air-hydraulic Booster is available, when the rotary table with hydraulic clamping system is used on the M/C without hydraulic source, please refer P.91.


### CNC180B, 202B, 260B, 302B, 321B, 401B





External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### CNC180B




















Air purge function is provided.

### CNC202B



















Air purge function is provided.


### CNC260B





















For the rotary table with pneumatic brake, air purge function is provided inside the motor cover as standard.

### CNC302B

















For the rotary table with pneumatic brake, air purge function is provided inside the motor cover as standard.

### CNC321B, CNC401B














Center socket shown in photo & layout is optional

290

### **BIG BORE CNC ROTARY TABLE**





- Ideal for machining boring pipes for oil or natural gas
- Capable of cutting through-holes in work pieces
- Supports up to 20 + 1P rotary joint ports

Example for the utilization for large diameter bar work

Large diameter scroll chuck.

















### Specifications

BIG BORE CNC Rotary Tables are all semi-standard models. Please contact us.

Item	n / Code No.	CNCB350	CNCB450	CNCB630
Diameter of Table ¢mm		350	450	630
Diameter of S		ф154н7	ф205н7	ф345н7
Center Height	: mm	230	280	380
Width of T Slo	ot mm	14	14	14
Clamping Sys	tem	Hydraulic	Hydraulic	Hydraulic
Clamping Tore	que N·m	3331	3870	6550
Table Inertia at I	Motor Shaft $\left(\frac{\text{GD}^2}{4}\right) \text{ kg·m}^2 \times 10^{-3}$	2.9	2.8	4.8
Servo Motor	r/min	αiF12•2000	αiF12•2000	αiF22•2000
MIN. Increme	nt	0.001°	0.001°	0.001°
Rotation Spee	ed r/min	22.2	16.6	11.1
Total Reduction	on Ratio	1/90	1/120	1/180
Indexing Accu	iracy sec	15	15	15
Net Weight	kg	245	330	750
MAX. Work Load	Vertical kg	250	350	400
on the Table	Horizontal kg	500	700	800
MAX.	N N	5300	63720	250000
Thrust Load applicable	*1 FXL N·m	2648	3531	5297
on the Table	FXL N·m	3840	5990	33000
Guide Line of MAX. Unbalancing Load	*2 N·m	100	150	300
MAX. Work Inertia	Vertical $(\frac{GD^2}{4})$ kg·m <sup>2</sup>	6.4	17.0	40.0
Driving Torque	N·m	432	576	1584

<sup>\*1</sup> This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.

<sup>\*2</sup> The guide line of MAX unbalancing load means the unbalancing load, when the rotary table is used with support table in vertical application. The guide line figure will be different according to the servo motor, please refer to 🖅 P.57 for more detail.

<sup>★</sup>Total reduction ratio of 1/180 is also available for CNCB450.

<sup>★</sup> XiF22/4000 motor can be mounted on CNCB350, 450.



## CNCB350, 450(T), 630





External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).


### **CNCB350**



## Ultra Big Bore ( $\phi$ 154mm) Specification
















### **CNCB450**



### Ultra Big Bore (\$\phi 205mm) Specification







### RIGHT HAND










### CNCB450T



### Ultra Big Bore (\$\phi\$205mm) Specification














### CNCB630



Ultra Big Bore ( $\phi$ 345mm) Specification











### **MULTI-SPINDLE CNC ROTARY TABLE**





- Multi-Spindle (2, 3 & 4 spindles) CNC rotary table series for rationalization of machining of small size work pieces  $(\phi 3 \sim 100 \text{mm})$
- Max. number of spindles CNC100: 4 spindles, CNC180: 4 spindles, CNC202: 4 spindles, CNC260: 2 spindles. Please contact us
- Ideal for small items and mass-produced parts

Option -ADD.

**AXIS** 




















Spe	ecifications	Multi-Spindle CNC Rotary	Tables are all semi-standard models. Ple	ase contact us. (	):High Speed type	Please contact us.
-----	--------------	--------------------------	--	-------------------	-------------------	--------------------

		,			(					
Iten	n / Code No.	CNC100-2W,-3W,-4W			CNC180-2W	CNC202-2W	CNC260-2W			
Diameter of Ta	able	105			180	200	260			
Diameter of S	pindle Hole	60н7 30			60н7 40	60нт 40	80н7			
Number of spi	indles (Pitch) mm	2,3,4×120			2×250	2×250	2×350			
Center Height	: mm	105			175	175	220			
Width of T Slo	ot mm		16 +0.018		12 +0.018	12 <sup>+0.018</sup>	12 +0.018			
Clamping Sys	tem		Pneumatic*2	2	Pneumatic*2	Pneumatic*2	Pneumatic*2 / Hydraulic			
Clamping Tore	•		147		303	303	588/1568			
Table Inertia at I	Motor Shaft $\left(\frac{\text{GD}^2}{4}\right) \text{ kg} \cdot \text{m}^2 \times 10^{-3}$	0.13	0.16	0.2	0.12	0.13	0.7			
Servo Motor	r/min		•2000 •2000)	αiF4•2000 (αiS8•2000)	αiF4•2000	αiF8•2000	αiF8•2000			
MIN. Increme	nt		0.001°		0.001°	0.001°	0.001°			
Rotation Spee	ed r/min	11.1 (44.4)			22.2	22.2	16.6			
Total Reduction	on Ratio	1/180(1/45)			1/90	1/90	1/120			
Indexing Accu	iracy sec	±30 ±45		±20	±20	20				
Net Weight	kg	70 90 120		120	115	120	320			
MAX. Work Load	Vertical kg	15		100	100	175				
on the Table	Horizontal kg		30		200	200	350			
MAX.	N N	3920		18000	18000	42480				
Thrust Load applicable	*1 FXL N·m		275		542	542	1442			
on the Table	FXL N·m	98		690	690	2320				
MAX. Work Inertia	Vertical $(\frac{GD^2}{4})$ kg·m²	0.019			0.5	0.5	1.9			
Driving Torque N·m		72			72	144	192			

<sup>\*1</sup> This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.



<sup>\*2</sup> Air Intensifying Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. The P.91

<sup>★</sup> Min. pitch between spindles CNC100: 120mm, CNC180: 250mm, CNC202: 250mm, CNC260: 350mm. Please contact us when the different pitch is required.

<sup>★ 4</sup> spindles table to suit 2 spindles M/C is available.

<sup>★ 5</sup> or 6 spindles CNC rotary table is also available.


### CNC100-2W, 3W, 4W, CNC180-2W, CNC202-2W, CNC260-2W




External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### CNC100-2W














Air purge function is provided inside the motor cover as standard.

If you need a knock hole for positioning or a key way on the table surface, please contact us.

### CNC100-3W



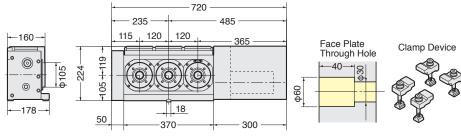









Air purge function is provided inside the motor cover as standard.

If you need a knock hole for positioning or a key way on the table surface, please contact us.

### CNC100-4W


















Air purge function is provided inside the motor cover as standard


If you need a knock hole for positioning or a key way on the table surface, please contact us. Clamp Device

### CNC180-2W, CNC202-2W



CNC202-2W













Air purge function is provided inside the motor cover as standard.

### **CNC260-2W**















For the rotary table with pneumatic clamping, air purge function is provided inside the motor cover as standard.

### CNC260-2W-325T




# NCT

## **CNC ROTARY TABLE**

New

HIGH CLAMPING TORQUE COMPACT CNC ROTARY TABLE



# Small but Strong NCT200

ADD. ACCURACY ROTARY ULTRA SUPPORT TABLE STOCK CHUCK CHUCK CHUCK DEVICE T-NUT PRECISIO P.57 P.95 P.81 P.79 P.71 P.73 P.75 P.76 P.77 P.78

### 900Nm

**Super-high Clamping System** 

#### Reliable indexing accuracy enhances profitability

Super-high Clamping torque 900Nm can be generated by air supply only. Strong clamping torque and better indexing accuracy enhance productivity.

### 25%UP

**High Rigidity of New Driving System** 

### Maintain high accuracy over the long term Reduce the total maintenance cost

Redesigning the driving system, the rigidity increases 25%. High durability of the mechanism is allowed to maintain high accuracy and to accomplish high precision machining operation over the long term.

### High Speed


Z Type is also Available

#### Reducing cycle time enhances productivity

High speed Z type is also available. Setting up gear ratio 1/2 is allowed rotation speed to be double.

### **Great Customization**

Without faceplate models are now available. A variety of options enhance the great utility for your applications.

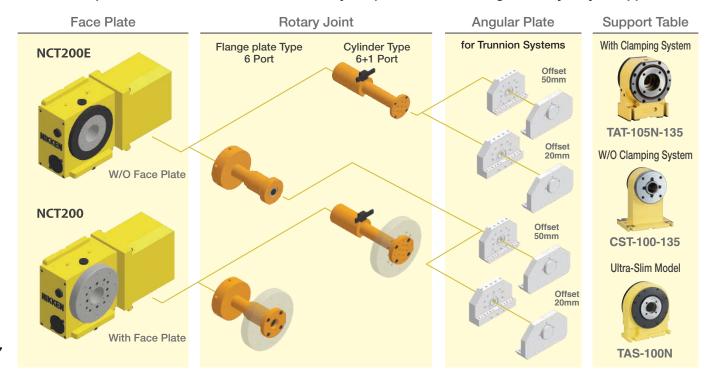





### Specifications

Itaa	m. / Oada Na	With Fa	ce Plate	W/O Face Plate			
Itei	m / Code No.	Standerd	High Speed	Standerd	High Speed		
Right Hand I	Mounted Moter	NCT200	NCTZ200	NCT200E	NCTZ200E		
Left Hand M	ounted Moter	NCT200L	NCTZ200L	NCT200EL	NCTZ200EL		
Diameter of T	able	200	200	130	130		
Diameter of S	pindle Hole	ф60н7 ф40	ф60н7 ф40	ф60н7 ф40	ф60н7 ф40		
Center Height	t mm	135	135	135 135			
Clamping Sys	stem	Pnematic*3	Pnematic*3	Pnematic*3	Pnematic*3		
Clamping Tor	que N·m	900	900	900	900		
Table Inertia at	Motor Shaft kg·m²X10 <sup>-3</sup>	0.1	0.1	0.1	0.1		
Servo Motor	$(\frac{GD^2}{4})$ r/min	αiF4·3000	αiF4·3000	αiF4·3000	αiF4·3000		
MIN. Increme	nt	0.001	0.001	0.001	0.001		
Rotation Spee	ed*4 r/min	33.3	66.6	33.3	66.6		
Total Reduction	on Ratio	1/90	1/45	1/90	1/45		
Indexing Accu	iracy sec	±20	±20	±20	±20		
Net Weight	kg	65	65	62	62		
MAX. Work Load	Vertical kg	100	100	100	100		
on the Table	Horizontal kg	200	200	200	200		
MAX.	F N	18000	18000	18000	18000		
Thrust Load applicable	*1 FXL N·m	677	677	677	677		
on the Table	FXL N⋅m	690	690	690	690		
Guide Line of MAX. Unbalancing Load	*2 N·m	60	30	60	30		
MAX. Work Inertia	Vertical $\sqrt[3]{\frac{1}{4}} + (\frac{GD^2}{4}) \text{ kg} \cdot \text{m}^2$	1.1	0.5	1.1	0.5		
Driving Torque N·m		151	121	151	121		

- \*1 This is the strength of the worm wheel without face plate clamping. It is applied against dynamic cutting thrust.
- \*2 The guide line of MAX unbalancing load means the unbalancing load, when the rotary table is used with support table in vertical application. The guide line figure will be different according to the servo motor, please refer P.57 for more detail.
- \*3 Air Intensifying Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. 🖙 P.91
- \*4 The table rotation speed when the motor rotates at 3000r/min. Depending on the application(unbalance of the jig,work) and the motor specification, the motor may not be able to rotate at 3000r/min.
- ★Driving torque means the torque at MAX. rotation speed after acceleration. Driving torque is almost constant and independent from the load except unbalancing load is applied.
- ★Standard faceplate is without T slot. T slot is available as an option. Please contact us.
- ★6" (Chuck plate: **X-6B**) and 7" (Chuck plate: **X-7A**) can be mounted for Face Plate with T slots.

### **DIMENSIONS OF NCT200**




### **NCT200 (With Face Plate)**



(Photo) NCT200FA

#### Face Plate Through Hole





**Clamp Device** 














#### Left Hand : NCT200LFA






#### Left Hand: With Cylinder type Rotary Joint


NCT200L+Clinder type Rotary Joint(6+1 Ports)
RT-NC200SD-6+1-L\*1







#### Left Hand: With Flange Plate type Rotary Joint


NCT200L+Flange Plate type Rotary Joint(6 Ports) RN-NC200SD-6+N-F\*1






#### Right Hand : NCT200FA






#### Right Hand: With Cylinder type Rotary Joint


NCT200+Clinder type Rotary Joint(6+1 Ports)
RT-NC200SD-6+1-R\*1






#### Right Hand: With Flange Plate type Rotary Joint

NCT200+Flange Plate type Rotary Joint(6 Ports) RN-NC200SD-6+N-F\*1






External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### **DIMENSIONS OF NCT200E**




### **NCT200E (W/O Face Plate)**




(Photo) NCT200EFA

#### Face Plate Through Hole



Clamp Device














#### Left Hand : NCT200ELFA






#### Left Hand : With Cylinder type Rotary Joint


NCT200EL+Clinder type Rotary Joint(6+1 Ports)
RT-NC20ESD-6+1-L\*1







#### Left Hand: With Flange Plate type Rotary Joint


**NCT200EL**+Flange Plate type Rotary Joint(6 Ports) **RN-NC20ESD-6+N-F**\*1






#### Right Hand : NCT200EFA






#### Right Hand: With Cylinder type Rotary Joint


NCT200E+Clinder type Rotary Joint(6+1 Ports)
RT-NC20ESD-6+1-R\*1






#### Right Hand: With Flange Plate type Rotary Joint

**NCT200E**+Flange Plate type Rotary Joint(6 Ports) **RN-NC20ESD-6+N-F**\*1






External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### **ANGULAR PLATE FOR NCT200E**






Model without faceplate: Custom Angular plates for use with the NCT200E. When combined with the NCT200E, they enable configuration of compact trunnion applications that maximize space inside the machine.

# Trunnion Applications Utilize the NCT's High Rigidity and Powerful Clamping Capability for More Efficient Utilization of Limited Space.

The NCT200 series, which can reliably drive trunnion applications with its powerful clamping capability and high rigidity exceeding the norm for this product class, is now provided with angle plates as a standard accessory. When combined with the NCT200E without faceplate, they allow application configuration that utilizes space inside the machine to the maximum.

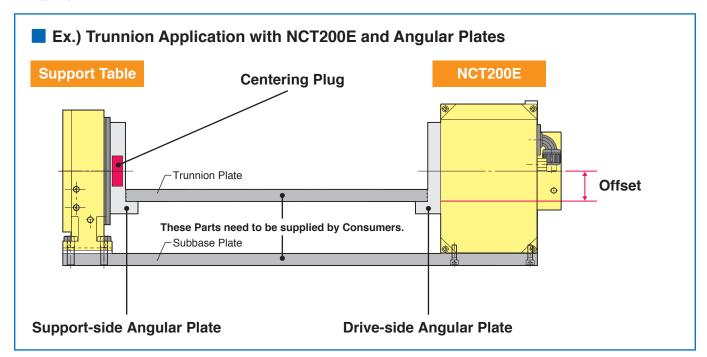

## Lineup Of Two Types for Internal or External Rotary Joints

A lineup of two types of drive-side angle plate is available for use in combination with the NCT200E to match the rotary joint specification. Specify the type of angle plate you require according to the components or applications.


#### 20 mm / 50 mm Selectable Offset

In addition, a lineup of two offset specifications is available for both the drive-side Angular plate and support-side Angular plate. This allows you to configure the optimal application to match the component size.



### SPECIFICATION OF ANGULAR PLATE FOR NCT200E NIKKEN



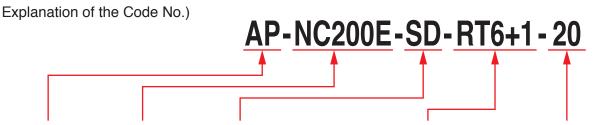

Code No. SP... Special


Angular Plate Product SD... Standard Number of Ports of Rotary Joint Offset

RT... Cylinder type ... 20mm ... 50mm RN··· Flange Plate type 50

N ... Non (Support-side Only)

#### Drive-side


#### Support-side

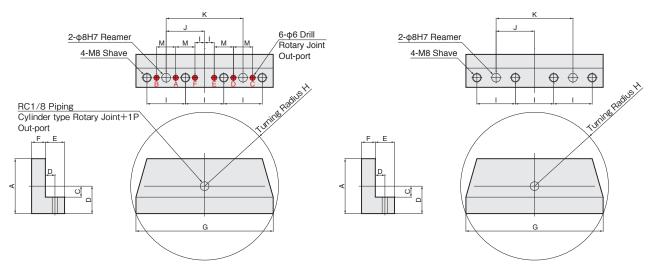

#### Specifications

Subject Models		type	Offset	Code No.	А	В	С	D	Е	F	G	Н	-1	J	К
Drive-side	NCT200E	Cylinder type	20mm	AP-NC200E-SD-RT6+1-20	133	53	20		20	25	200	107	60	60±0.01	120±0.01
		Rotary Joint Ports Including	50mm	AP-NC200E-SD-RT6+1-50	150	70	50	44				114			
		Flange Plate type Rotary Joint Ports Including	20mm	AP-NC200E-SD-RN6-20	133	53	20	11				113			
			50mm	AP-NC200E-SD-RN6-50	150	70	50			35		114			
Support-side	TAS-100N	with Centering Plug	20mm	AP-TAS100-SD-N-20	105	53	20	16	25 2		200	113		60±0.01	120±0.01
			50mm	AP-TAS100-SD-N-50	122	70	50			20		114	60		
	TAT-105N-135	Contoring Plug	20mm	AP-TAT105-SD-N-20	105	53	20	16		20		113	60		
			50mm	AP-TAT105-SD-N-50	122	70	50					114			

The rotary joint is not included in the set of the angular plate. Please order both angular plate and rotary joint.

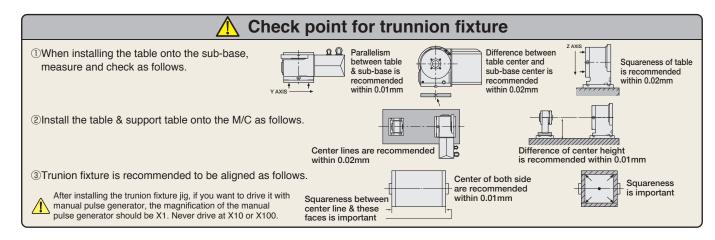

## NSV ROTARY HIRTH COUPLING INDEX



- Ideal for deep cutting of highly rigid material
- Indexing Accuracy : ±2"
- No Lifting up of Table at Indexing Time. (Built-in 3 pieces of Hirth Coupling)

Option ADD. ACCURACY ROTARY ULTRA AXIS SPEC. PRECISIO JOINT P.81 P.57 P.95 P.79

TABLE P.71

TAIL STOCK P.73

Accessories SCROLL POWER **CHUCK** CHUCK P.75 P.76





#### Specifications

	cations		NCV7100	NCV7200	NCVV400	NOVYEOD	NEVYAGET	
Item / Code No.  Diameter of Table			NSVZ180	NSVZ300	NSVX400	NSVX500	NSVX400T	
	1		180	300	400	500	400	
		фтт	ф60н7 ф30	Ф60н7 Ф52	Ф80н7	Ф80н7	Ф80н7	
	Center Height mm		135	170	240	310	240	
	Width of T Slot mm		12 0 12 18	12 +0.018	14 0 14 0	14 0 14 0	14 0 14 0	
Clamping Sy			Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	
Clamping To		N·m	910	2155	5880	5880	5880	
Table Inertia a	t Motor Shaft $(\frac{GD^2}{4})$ k	(g·m²×10 <sup>-3</sup>	0.11	0.16	2.9	3.9	2.9	
Servo Motor		r/min	α iF2•2000	α iF4•2000	α iF12·2000	α iF12·2000	α iF12·2000	
MIN. Increm	ent		1°	1°	1°*/0.001°	1°*/0.001°	1°*/0.001°	
Rotation Spe	eed	r/min	11.1	11.1	22.2	16.6	16.6	
Total Reduc	tion Ratio		1/180	1/180	1/90	1/120	1/120	
Indexing Acc	curacy	sec	±3	±2	±2*	±2*	±2*	
Net Weight		kg	60	150	325	410	350	
MAX. Work Load	Vertical	kg	50	150	250	250	250	
on the Table	Horizontal	kg	100	300	500	500		
MAX.		N	23520	39200	58800	58800	58800	
Thrust Load applicable on the	*1	F×L N·m	911	2156	5880	5880	5880	
Table		F×L N·m	569	1421	3920	3920	3920	
Guide Line of MAX. Unbalancing Load	*2	N·m	30	30	100	100	_	
MAX. Work Inertia	Vertical	<sup>GD²</sup> / <sub>4</sub> ) kg·m²	0.14	1.0	6.4	6.4	11.5	
Driving Torque		N·m			432	576	576	

<sup>\*1</sup> This is the strength of the clamping by the hirth coupling.

\*2 The guide line of MAX unbalancing load means the unbalancing load, when the rotary table is used with support table in vertical application. The guide line figure will be different according to the servo motor, please refer to FP.57 for more detail.

\* NSVZ series are indexing table which is indexable at each 1°.

\* NSVX series are rotary and indexing table which clamped by hirth coupling (of high precision & high rigidity) at each 1°, also perform min. command incremental at 0.001° and profile milling.

\* OliFA/5000 motor can be mounted on NSVZ180.

 <sup>★</sup> Please be careful that the centralizing of work piece or jig fixture should be done after indexing, not rotating.
 ★ The solenoid valve is installed inside the table for the indexing table with NIKKEN controller. The solenoid valve must be installed at the hydraulic tank for the indexing table of the additional axis control.




### NSVZ180, 300, NSVX400, 400T, 500



### No lift (Three pieces of Hirth Coupling)

Three pieces of 360 division precision hirth coupling ensures smooth and fast indexing without table lifting.


●3-piece Hirth coupling developed in-house by NIKKEN




External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### NSVZ180



















### NSVZ300

Photo with center socket. (optional)

















### NSVX400

















### NSVX400T








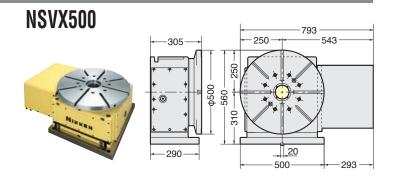


Photo: for horizontal use.

# NST MANUAL TILTING ROTARY TABLE



- Table can be tilted at  $0^{\circ}$  70° manually
- Indexing is CNC controlled so that it can be adapted to all kinds of machining
- Suitable for wide variety of applications thanks to numerical tilting axis control













#### ACCURACY **SCROLL** T-NUT STOCK CHUCK P.57 P.77 P.78

### Specifications

Iten	n / Code No.	NST250	NST300	NST500
Diameter of T	able	250	300	500
Diameter of Spindle Hole \$\phi_mm\$		Ф60нл Ф52	Ф60н7 Ф60	Ф75нт Ф61.5
Center Height	t mm	155	208	288
Width of T Slo	ot mm	12 +0.018	12 +0.018	14 +0.018
Clamping Sys	stem	Pneumatic*2	Pneumatic*2	Pneumatic*2
Clamping Tor	que N·m	147	196	196
Table Inertia at I	Motor Shaft $\left(\frac{GD^2}{4}\right) \text{ kg} \cdot \text{m}^2 \times 10^{-3}$	0.39	0.59	0.69
Servo Motor	r/min	α iF2•2000	α iF4•2000	α iF8•2000
MIN. Increme	nt	0.001°	0.001°	0.001°
Rotation Spee	ed r/min	16.6	11.1	5.5
Total Reduction	on Ratio	1/120	1/180	1/360
Indexing Accu	iracy sec	20	20	20
Net Weight	kg	75	135	320
MAX. Work Load	90° kg	50	100	200
on the Table	Horizontal kg	100	300	500
MAX. Thrust	F N	17500	31860	75000
Load applicable	*1 FXL N·m	603	903	2884
on the Table	FXL N·m	770	2010	8330
MAX. Work Inertia	90°	1.35	3.37	14.70
Driving Torque	N·m	144	288	1152

<sup>\*1</sup> This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.

<sup>\*2</sup> Air Intensifying Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. 🖙 P.91

<sup>★</sup> XiF4 motor can be mounted on NST250.

<sup>★</sup> XiF8/3000 motor can be mounted on NST300.




# NST250, 300, 500




External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### **NST250**







Center socket shown in photo is optional.

Clamp Device








Guide key width: 18mm

Table height in horizontal position: 151mm

# **NST300**




Center socket shown in photo is optional.



Center height at 90°: 208mm

Center height at 90°: 155mm



Clamp Device








Guide key width: 18mm

Table height in horizontal position: 182mm

# **NST500**



Center socket shown in photo is optional.



650——650——Center height at 90°: 288mm

Face Plate Through Hole

Clamp Device







Guide key width: 18mm Table height in horizontal position: 285mm

# 5AX

# **TILTING ROTARY TABLE**

New

THE SMALLEST TILTING CNC ROTARY TABLE FOR COMPACT MACHINES



Ultra Compact Tilting Rotary Table

**5AX-100** PAT.





# Minimum & Lightest Weight

### The Smallest and Lightest 5AX

Demonstrates the true worth of a compact machining center with limited machining space.

With a body width of 466mm and product weight of 84 kg, the 5AX series is the smallest and lightest tilting rotary table in NIKKEN's history. It is an ideal counterpart to products such as the BT30 compact machining center. It allows you to secure more machining space than was possible with earlier models.

# Tilting Axis600Nm

Powerful braking system with double clamping sleeve type PAT. Tilt-axis with Air-hydranlic unit as Standard Equipment.

# Astoundingly powerful clamping capability in spite of compact body.

For machines with no hydraulic power source, the tilt-axis is equipped with an air-hydro unit that provides powerful hydraulic clamping using only an air supply. In spite of its compact body, it delivers an astounding 600 Nm of clamping power, enabling high positioning accuracy for highly precise machining.

# **Extensive Lineup of Attachments**

This extensive attachment lineup from NIKKEN allows machining of a wide variety of work pieces.



Jig Plate



Scroll Chuck




Center Socket

High-precision 5-axis machining of precision electronic devices such as smartphones, automobile parts, etc. can be accomplished using a compact machining center.



Impeller

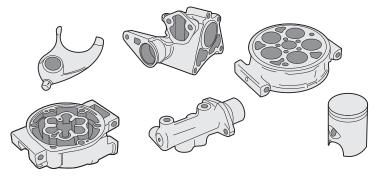



Components of Automotive Parts













### Specifications

Specifi	Specifications					
Iten	n / Code No.		5AX-100			
Diameter of T	able ¢n	nm	9	00		
Diameter of S	pindle Hole	nm	Ф50нт Ф30			
Center Height	t (90°) n	nm	1:	35		
Table Height in H	Horizonatal Position (0°)	nm	19	90		
Width of T Slo	ot n	nm	Ф8н7 F	Pin hole		
Axis			Rotary	Tilting (0°∼105°)		
Clamping Sys	stem		Pneumatic*1	Air Hydraulic Booster Built-in type		
Clamping Tor	que N	l·m	205	600		
Table Inertia at I	Motor Shaft $(\frac{GD^2}{4})$ kg·m <sup>2</sup> ×1	0-3	0.09	0.12		
Servo Motor	r/n	nin	α iF1•2000	α iF1•2000		
MIN. Increme	nt		0.001°	0.001°		
Rotation Spec	ed r/n	nin	44.4	22.2		
Total Reduction	Total Reduction Ratio		1/45	1/90		
Indexing Accu	Indexing Accuracy sec		±30	60		
Net Weight		kg	84			
MAX. Work Load	0° to 30°	kg	40			
on the Table	30° to 90°	kg	20			
	Tilting Angle	N	5300			
MAX. Thrust Load	Tilting Angle		L=45mm F=3820N			
applicable on the Table	Tilting Angle F1 F2 = 90° +		L <sub>1</sub> =0mm L <sub>2</sub> =100mm	$F_1 = 2945N$ $F_2 = 1045N$		
		×L	98			
MAX. Work Inertia	+ ( <u>GD<sup>2</sup></u> ) kg·	m²	0.03			
Driving Torque	N·	m	18			

■ The Area of Noninterference in Tilting Position.

Angle	5AX-100
0° \$ 45°	\$170 \$140 \$140 \$150 \$150 \$150 \$150 \$150 \$150 \$150 \$15
0° \$ 90°	\$170 \$140 \$140 \$1
0° \$ 105°	\$\frac{15^{\circ}}{\phi 150} \\ \phi 150 \\ \phi 140 \\ \phi 150 \\ \phi 140 \\ \phi 150 \

<sup>\*1</sup> Air Intensifying Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. \*\* P.91\*\*

# **COMPACT TILTING ROTARY TABLE**





- Rotary and tilting axes are controlled by CNC
- Various kinds of attachments









P.57













### Specifications

Iter	m / Code No.		5AX	-130	5AX	-201
Diameter of T	able	фmm	105		2	00
Diameter of Spindle Hole \$\phi_m\$		фmm	Ф60нл Ф30		Ф60нт Ф50	
Center Height	: (90°)	mm	15	50	180	
Table Height in F	Horizonatal Position (0°)	mm	22	20	2	60
Width of T Slo	ot	mm	ф10Н7	Pin hole	12	+0.018 0
Axis			Rotary	Tilting (0°∼105°)	Rotary	Tilting (0°∼105°)
Clamping Sys	tem		Pneumatic*2	Pneumatic*2	Pneumatic*1*2/ Hydraulic	Pneumatic*1*2/ Hydraulic
Clamping Tor	que	N·m	205	303	303*1*2/ 588	303*1*2/ 612
Table Inertia at I	Motor Shaft $(\frac{GD^2}{4})$ kg·m <sup>2</sup>	×10 <sup>-3</sup>	0.09	0.12	0.11	0.16
Servo Motor	r	/min	αiF2•3000	αiF2•2000	αiF2·3000	αiS4·2000
MIN. Increme	nt		0.001°	0.001°	0.001°	0.001°
Rotation Spee	ed <sup>*3</sup> r	/min	33.3	11.1	33.3	16.6
Total Reduction	on Ratio		1/90	1/180	1/90	1/120
Indexing Accu	Indexing Accuracy sec		±30	60	±15	60
Net Weight		kg	115		160	
MAX. Work Load	0° to 30°	w kg	50		60	
on the Table	30° to 90°	] <sub>kg</sub>	25		40	
	Tilting Angle	N	58	80	98	300
MAX. Thrust Load	Tilting Angle		L=65mm	F=2940N	L=100mm	F=4900N
applicable on the Table	Tilting Angle F <sub>1</sub> F <sub>2</sub> = 90° +		L <sub>1</sub> =0mm L <sub>2</sub> =100mm	F <sub>1</sub> =3460N F <sub>2</sub> =1590N	L <sub>1</sub> =0mm L <sub>2</sub> =100mm	F <sub>1</sub> =5880N F <sub>2</sub> =2940N
rabio	Tilting Angle = 90°	F×L N·m	98		3	82
MAX. Work Inertia	+ ( ( <u>GD<sup>2</sup></u> ) k	⟨g·m²	0.12		0	.5
Driving Torque		N·m	7	72		2

<sup>\*1</sup> Air brake system is also available for 5AX-201.

<sup>\*2</sup> Air Intensifying Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. © P.91

<sup>\*3</sup> The table rotation speed when the motor rotates at 3000r/min. Depending on the application(unbalance of the jig,work) and the motor specification, the motor may not be able to rotate at 3000r/min.



# 5AX-130, 5AX-201





External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).


### 5AX-130



Photo with  $\phi$ 130mm plate. (Standard accessories)

















Center height of high column table is 65mm higher than that of standard table.

5AX-201















Built-in type 4 ports rotary joint can be attached on standard type as an option. (High column type is not necessary.)

# 5AX-130BA

The tilting axis motor is mounted at back side.



5AX-201BA The tilting axis motor is mounted at back side.



### ■ The Area of Noninterference in Tilting Position.

Angle	5AX-130	5AX-201
0° \$ 45°	φ135—— 8	φ210 <del>- 4</del>
0° \$ 90°	ф300 ф135 — ф135 — б	\$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
0° \$ 105°	ф235 — ф135 — 0.2	φ250 φ210 φ210 β

# **TILTING ROTARY TABLE**





- CNC tilting rotary table with powerful clamping system
- A best-selling product suitable for use with mediumsize machining center
- Ideal for lines consisting of horizontal machines only



# Specifications

Item / Code No.		5AX-230*1		5AX-250	
Diameter of Ta	able	23	0	250	
Diameter of Spindle Hole \$\phi\$mm		Ф60н7 Ф40		Ф60нт Ф50	
Center Height	(90°) mm	24	.0	250	
Table Height in H	Horizonatal Position (0°) mm	28	5	25	50
Width of T Slo	t mm	12 +	-0.018 0	12 +0.018	
Axis		Rotary	Tilting (0°∼105°)	Rotary	Tilting (0°∼105°)
Clamping Sys	tem	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Clamping Tord	que N·m	490	3430	588	490
Table Inertia at I	Motor Shaft $\left(\frac{\text{GD}^2}{4}\right) \text{ kg} \cdot \text{m}^2 \times 10^{-3}$	0.3	0.5	0.11	0.16
Servo Motor	r/min	α iF4•2000	α iF8•2000	α iF4•2000	α iF4•2000
MIN. Increme	nt	0.001°	0.001°	0.001°	0.001°
Rotation Spee	ed r/min	11.1	5.5	22.2	11.1
Total Reduction	on Ratio	1/180	1/360	1/90	1/180
Indexing Accu	iracy sec	20	60	20	60
Net Weight	kg	22	0	290	
MAX. Work Load	0° to 30°	100		80	
on the Table	30° to 90°	10	00	50	
	Tilting Angle  F   F   P   N	11760		98	00
MAX. Thrust Load	Tilting Angle	L=115mm	F=5880N	L=100mm	F=4900N
applicable on the Table	Tilting Angle	L <sub>1</sub> =0mm L <sub>2</sub> =100mm			F <sub>1</sub> =12040N F <sub>2</sub> =6020N
	Tilting Angle = 90° F FXL N·m	451		382	
MAX. Work Inertia	+ $\left(\frac{\text{GD}^2}{4}\right) \text{ kg·m}^2$	0.66		0.	5
Driving Torque	N·m	28	38	14	14

<sup>\*1 5</sup>AX-230 is semi-standard model.



# 5AX-230, 5AX-250

25




External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).





Center socket shown in photo is optional.

★ Swing box in which cables and hydraulic hoses are fixed is also available. Please contact us. 60 265 Rotary center 265 480 -264 φ230 285 80 36 Tilting center












# 5AX-250















Built-in type 3 ports rotary joint can be attached on standard type as an option.

### ■ The Area of Noninterference in Tilting Position.

Angle	5AX-230	5AX-250
0° \$ 45°	φ350	φ315 φ260 φ260 4260 6260
0° \$ 90°	φ480 φ320 β6	φ425 φ315 φ260 08
0° \$ 105°	φ370 φ260 β	φ315 φ260

### Example when tilting base is supplied from M/C builder.



Tilting Base

# TILTING ROTARY TABLE





- CNC tilting rotary table with powerful clamping system
- A best-selling product suitable for use with medium-size and large machining center
- Ideal for lines consisting of horizontal machines only













# Specifications

Iter	n / Code No.	5AX	-350	5A)	(-550
Diameter of T	able	350		550	
Diameter of S	pindle Hole	Ф80н7		Ф130н7	
Center Height	t (90°) mm	3	00	380	
Table Height in F	Horizonatal Position (0°) mm	3	00	5	18
Width of T Slo	ot mm	12 <sup>-</sup>	+0.018 0	14	+0.018 0
Axis		Rotary	Tilting (0°∼105°)	Rotary	Tilting (0°∼105°)
Clamping Sys	stem	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Clamping Tor	que N·m	1568	1568	3430	6272
Table Inertia at I	Motor Shaft $\left(\frac{GD^2}{4}\right) \text{ kg·m}^2 \times 10^{-3}$	0.8	1.35	5.5	5.2
Servo Motor	r/min	αiF8 •2000	α iF12 •2000	α iF12 ·2000	α iF12 ·2000
MIN. Increme	nt	0.001°	0.001°	0.001°	0.001°
Rotation Spec	ed r/min	22.2	22.2	11.1	5.5
Total Reduction	on Ratio	1/90	1/90	1/180	1/360
Indexing Accu	uracy sec	20	60	20	60
Net Weight	kg	420 (without Base:355)		1150	
MAX. Work Load	0° to 30° kg	200		500	
on the Table	30° to 90°	2	00	3	00
	Tilting Angle  F	19	600	31	360
MAX. Thrust Load	Tilting Angle.	L=175mm	F=4900N	L=275mm	F=9800N
applicable on the Table	Tilting Angle F1 F2 = 90° +	L₁=0mm L₂=100mm	L <sub>1</sub> =0mm F <sub>1</sub> =17160N L <sub>2</sub> =100mm F <sub>2</sub> =8580N		F <sub>1</sub> =19600N F <sub>2</sub> =14120N
Table	Tilting Angle FXL N·m	858		2!	548
MAX. Work Inertia	+ $\left(\frac{\text{GD}^2}{4}\right) \text{ kg·m}^2$	3.2		2	23
Driving Torque	N·m	2	88	8	64




# 5AX-350, 5AX-550



External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### 5AX-350



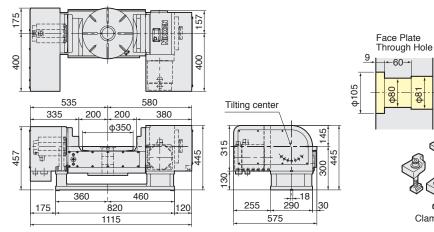






Built-in type 6 ports rotary joint is available on standard type. (optional) (High column type is not necessary)


# 5AX-550

### Powerful double clamping system on both ends of tilting axis











Built-in type 4 ports rotary joint is available on standard type. (optional) (High column type is not necessary)


### ■ The Area of Noninterference in Tilting Position.

Angle	5AX-350	5AX-550
0° \$ 45°	0455 0400 02	φ660 09
0° \$ 90°	\$\frac{\phi 540}{\phi 455}\$\$\$\frac{\phi 400}{\phi 400}\$\$\$\$?	φ750 φ640 φ550 04
0° \$ 105°	0 24°	φ550

Built-in type **5AX**- rotary tables are more and more getting popular as a component of M/C, even for the special applications.



Utilization for 4th and 5th axis rotary table of the M/C for die molding





R-Test System Accuracy of Speeds and Interpolations for 5AX- Table ISO10791-6

Ball Bar System

# **LARGE TILTING ROTARY TABLE**





- CNC tilting rotary table with powerful clamping system at both side
- Counter balance weight can be installed on 5AX-1200A to compensate the unbalancing load as standard
- Ideal for gantry type systems, machining centers, and 5-plane machines



### Specifications The specification will be varied according to your application. Please contact us.

Iter	m / Code No.	5AX	-800	5AX-	1200
Diameter of Table		800×500		1200	
Diameter of S	Spindle Hole	Ф130		Ф300н7	
Center Heigh	t (90°) mm	55	50	750	
Table Height in I	Horizonatal Position (0°) mm	50	00	99	50
Width of T Slo	ot mm	(14 +	-0.018)*1	22+	+0.018 *1 0
Axis		Rotary	Tilting	Rotary	Tilting (-20°~105°)
Clamping Sys	stem 3.5MPa	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Clamping Tor	que N·m	4655	6125	14700	19600
Table Inertia at	Motor Shaft $\left(\frac{\text{GD}^2}{4}\right) \text{ kg·m}^2 \times 10^{-3}$	6.8	6.0	10.8	3.5
Servo Motor	r/min	α iF22•2000	αiF40•2000	α iF22•2000	α iF22•2000
MIN. Increme	nt	0.001°	0.001°	0.001°	0.001°
Rotation Spee	ed r/min	25	12.5	5.5	2.7
Total Reducti	on Ratio	1/60	1/120	1/360	1/720
Indexing Accu	uracy sec	20	60	20	60
Indexing Accuracy of Ultra Precision *2 sec		±5	±10	±5	±10
Net Weight	kg	2300		7300	
MAX. Work Load	0° to 30°	50	00	25	000
on the Table	30° to 90°	50	00	15	00
	Tilting Angle   F   = 0°	310	360	137	200
MAX. Thrust Load	Tilting Angle	26	95	54	88
applicable on the Table	Tilting Angle F <sub>1</sub> F <sub>2</sub> = 90° +	2824		9600	
1 4515	Tilting Angle F FXL N·m	25	48	147	700
MAX. Work Inertia	+ $\left(\frac{\text{GD}^2}{4}\right) \text{ kg·m}^2$	23		27	76
Driving Torque	N·m	42	22	31	68



# 5AX-800, 5AX-1200





External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).


### 5AX-800

### Powerful double clamping system on both ends of tilting axis.












### 5AX-1200

### Powerful double clamping system on both ends of tilting axis.












### ■ The Area of Noninterference in Tilting Position.

Angle	5AX-800	5AX-1200
0° \$ 45°	\$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	\$\partial \frac{\partial \frac
0° \$ 90°	ф1080 ф800 ф1080	\$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
0° \$ 120°	9800	ф1280


Counter balance weight can be installed on **5AX-1200A** to compensate the unbalancing load as standard.


410-410-

820









# **MULTI-SPINDLE TILTING ROTARY TABLE**





5AX-4MT-105-120

- Tilting rotary table with Multi-Spindle
- Various attachment for fixing work piece
- Ideal for small items and massproduced parts

Option

ROTARY

ACCURACY



T-NUT




#### **AXIS** SPEC. JOINT PRECISIO STOCK CHUCK CHUCK DEVICE P.57 P.81 P.76 P.78

### Specifications Multi-Spindle Tilting Rotary Tables are all semi-standard models. Please contact us.

ADD.

Item / Code No.		5AX-2MT-105-120		5AX-4MT-105-120	
Diameter of T	able	105		105	
Diameter of S	pindle Hole	Ф60нт Ф30		ф60нт ф30	
Number of spi	indles (Pitch) mm	2 spindl	es (120)	4 spindles (120)	
Center Height	(90°) mm	17	75		235
Table Height in H	Horizonatal Position (0°) mm	25	50	;	300
Width of T Slo	ot mm	-	_		-
Axis		Rotary	Tilting (0°∼105°)	Rotary	Tilting $(-110^{\circ} \sim +110^{\circ})$
Clamping Sys	tem	Pneumatic*1	Pneumatic*1	Hydraulic	Hydraulic
Clamping Tore	<u> </u>	147	147	147	343
Table Inertia at I	Motor Shaft $\left(\frac{\text{GD}^2}{4}\right) \text{ kg} \cdot \text{m}^2 \times 10^{-3}$	0.13	0.13	0.2	0.48
Servo Motor	r/min	α iF2•3000	α iF2•2000	α iF8•3000	α iF4•2000
MIN. Increme		0.001°	0.001°	0.001°	0.001°
Rotation Spee	ed*2 r/min	33.3	11.1	16.6	16.6
Total Reduction	on Ratio	1/90	1/180	1/180	1/120
Indexing Accu	iracy sec	±30	60	±45	±30
Net Weight	kg	150		350	
MAX. Work Load	0° to 30°	1	15		25
on the Table	30° to 90°	1	0	15	
	Tilting Angle   F   = 0°   The state   N   N   The state   The sta	39	020	3920	
MAX. Thrust Load	Tilting AngleL = 0° F	L=60mm	F <sub>1</sub> =784N	L=60mm	F=2858N
applicable Tilting Angle F1 F2 = 90° + 1 F2		L <sub>1</sub> =0mm F <sub>1</sub> =653N L <sub>2</sub> =100mm F <sub>2</sub> =490N		L <sub>1</sub> =0mm F <sub>1</sub> =1380N L <sub>2</sub> =100mm F <sub>2</sub> =1040N	
	Tilting Angle L————————————————————————————————————	49		49	
MAX. Work Inertia	+ $\left(\frac{\text{GD}^2}{4}\right) \text{ kg·m}^2$	0.014		0	.021
Driving Torque	N·m	3	36		144

<sup>\*1</sup> Air Intensifying Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. 🖙 P.91



<sup>\*2</sup> The table rotation speed when the motor rotates at 3000r/min. Depending on the application(unbalance of the jig,work) and the motor specification, the motor may not be able to rotate at 3000r/min.

Min. pitch between spindles:120mm. If you need different pitch, please contact us.

<sup>★ 4</sup> spindle rotary table to suit 2 Spindle M/C is also available, please contact with us.

<sup>★</sup> Max numbers of spindles:4 spindles.




# **5AX-2MT,5AX-4MT**





External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

### 5AX-2MT-105-120









Clamp Device



Center height of high column table is 35mm higher than that of standard table.


MAX. number of ports in rotary joint Standard: 4 ports, High Column: 6 ports


If you need a knock hole for positioning or a key way on the table surface, please contact us.


### 5AX-4MT-105-120



4" Power chuck in photo is optional.













MAX. 6 port rotary joint can be installed on standard type as an option.

If you need a knock hole for positioning or a key way on the table surface, please contact us.

### Multi-Spindle Tilting Rotary Table

For Multi-Spindle Tilting Rotary Table, please contact us to know the required faceplate diameters, fixture attachment (e.g. Power Chuck etc), the required spindle pitch, the M/C model and the type of NC.



5AX-2MT-170-200



5AX-2MT-201-250



5AX-2MT-200-360



5AX-2MT-200-250



5AX-2MT-201-320



5AX-2MT-180-250



5AX-2MT-130-170



5AX-2MT-182-250-205B

# **CNC ROTARY TABLE WITH DD MOTOR**


THE SMALLEST TILTING CNC ROTARY TABLE WITH DD MOTOR FOR COMPACT MACHINES



Ultra Compact Tilting Rotary Table with DD Motor

# **5AX-DD100**

Explanation of the Code No.(Example)

















# Only 554mm Wide

The Smallest 5AX with DD Motor

#### Demonstrates the true worth of a compact machining center with limited machining space.

With a body width of 554 mm, 5AX-DD100 is he smallest tilting rotary table with DD motor in NIKKEN's history. It is an ideal counterpart to products such as the BT30 compact machining center. It allows you to secure more machining space than was possible with earlier models.


### Opens up New Possibilities for Machining with Compact M/C

#### Suitable for many applications, from IT parts to automotive parts.

High-precision 5-axis machining of precision electronic devices such as smartphones, automobile parts, etc. can be accomplished using a compact machining center.



Impeller



Components of Automotive Parts

# High-acceleration/ deceleration.

Compact unit with high-speed rotation

#### Standout performers in 5-axis high-speed machining

This compact unit employs a DD motor for high-speed rotation and high-acceleration/deceleration. Opens up new possibilities for cutting and machining, ranging from IT parts requiring high-speed, high-grade machining to auto parts requiring high-speed machining.

### NIKKEN's Exclusive "TT Solutions"

### As an expert in both tables and tooling, NIKKEN offers more.

Allows for even higher precision and efficiency when combined with our Mini-Mini Chuck Advanced Alpha collet chucks, which are standout performers in 5-axis machining.





Image: 5AX Machining

# **5AX-DD100**







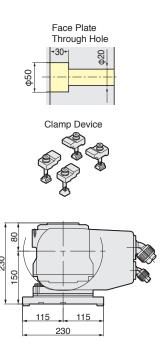

# ■ The Area of Noninterference in Tilting Position.

Al .	FAV DD400
Angle	5AX-DD100
0° <b>\$</b> 45°	φ200
0° \$ 90°	φ200
0° <b>\$</b> 110°	φ200 Ω

# **Specifications** The external dimension and the specification will be varied according to the DD motor. Please contact us.


Item / Co	ode No.	5AX-DI	D100AF			
Diameter of Table	Фmm	90				
Diameter of Spindle	Hole ¢mm	50н7	ф20			
Center Height (90°)	mm	1!	50			
Table Height in Horizonat	al Position (0°) mm	23	30			
Width of T Slot	mm	ф8н7 Pin hole				
Axis		Rotary	Tilting (0°∼110°)			
Clamping System		Pneumatic*1 (0.5MPa)	Pneumatic*1 (0.5MPa)			
Clamping Torqyue	Nm	75	205			
Motor (FANUC)		DiS15/1000 DiS60/400				
Encoder		MPRZ-536A	MPRZ-536A			
Min. Incremental	deg.	0.0	001			
Rotation Speed	r/min	200	200			
indexing Accuracy	sec.	±10	±1			
MAX. Torque	Nm	35	130			
Constant Torque	Nm	8.7/16 <sup>*2</sup>	24/65*2			
Net Weight	kg	120				
MAX. Work Load	0∼30deg. kg	2	0			
IVIAA. WUIK LOAU	0∼90deg. kg	10				

<sup>\*1</sup> Air-air Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. F.91

<sup>\*2</sup> Show the figures with cooling system.

# **CNC ROTARY TABLE with DD MOTOR**






### Configuration

There is no mechanical reduction mechanism such as worm system in a rotary table with DD motor. DD (Direct Drive) motor is built in the the rotary table to drive directly. High rotation speed and high acceleration/deceleration can be done. However, the driving torque of the rotary table is not strong due to no mechanical reduction mechanism. Therefore, the suitable application of the rotary table with DD motor must be selected.

- High Response: 150r/min (DD251)
- High Response of Micro Spike Clamping System
- Explanation of the Code No.(Example)



# Micro Spike


# **High-Acceleration / High-Speed / Compact Unit**


Suitable for the machining of the impeller.




Suitable for the machining of the impeller.











### Specifications

The external dimension and the specification will be varied according to the DD motor. Please contact us.

Item / Code No.	DD201F-60	DD251F-150	DD402F-300		
Diameter of Table φmm	200	250	400		
Diameter of Spindle Hole	ф30н7	ф75н7	ф100н7		
Center Height mm	135	170	230		
Width of T Slot mm	12н7	12н7	14н7		
Clamping System	Pneumatic*	<sup>1</sup> (0.5MPa)	Hydraulic(3.5MPa)		
Clamping Torqyue Nm	150	500	930		
Motor (FANUC)	DiS60/600-B	DiS180/800-B	DiS300/300-B		
Encoder	<b>α</b> iCZ Sei	αiCZ Sensor 512A			
Min. Incremental deg.		0.001			
Rotation Speed r/min	200	150	125		
indexing Accuracy sec.		±10			
Net Weight kg	70	105	250		
MAX. Work Load kg	50	100	150		
MAX. Torque Nm	140	380	600		
Constant Torque Nm	34/65*2	73/170* <sup>2</sup>	100/215*2		
Necessary Cooling Capacity w	1500	1600	1500		

<sup>\*1</sup> Air Intensifying Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. FP.91

<sup>\*2</sup> Show the figures with cooling system. Please be careful that cooling by the special liquid may not be good for the chiller system. When cooling system is used, please check the cooling system, and stop the DD motor when the unusual condition is found.


# **ROTARY TILTING TABLE with DD MOTOR**


# **NIKKEN**


### 5AX-DD201AF3 PAT.





★The tilting axis center is located in the same position as the center of the rotary axis body.
















# 5AX-DD201BF3 PAT.





★The tilting axis center is located in the same position as the top surface of the rotary axis body.











### Specifications

The external dimension and the specification will be varied according to the DD motor. Please contact us. 

The Area of Noninterference in Tilting Position.

Item / Code No.	5AX-DE	)201AF3	5AX-DD	201BF3	
Diameter of Table φm	n 2	00	200		
Diameter of Spindle Hole Φm	n ф5	3н7	ф5	3н7	
Center Height (90°) m	n 1:	95	27	70	
Table Height in Horizonatal Position (0°) m	n 2	95	27	70	
Width of T Slot m	n 12	2н7	12	H7	
Axis	Rotary	Tilting (±110°)	Rotary	Tilting (±110°)	
Clamping System	Pneumatic*1(0.5MPa)	Pneumatic*1(0.5MPa)	Pneumatic*1(0.5MPa)	Pneumatic*1(0.5MPa)	
Clamping Torqyue N	n 150	500	150	500	
Motor (FANUC)	DiS60/600-B	DiS180/800-B	DiS60/600-B	DiS180/800-B	
Encoder	lphaicz	Z 512A	<b>α</b> iCZ 512A		
Min. Incremental de	g. 0.0	001	0.001		
Rotation Speed r/m	n 200	150	200	150	
indexing Accuracy se	±10	±15	±10	±15	
MAX. Torque N	n 140	400	140	400	
Constant Torque N	n 34	75/180* <sup>2</sup>	34	75/180* <sup>2</sup>	
Net Weight	g 1	185		205	
MAX. 0~30deg. k	g 3	30	3	0	
Work Load 0~90deg. k	g 1	5	3	0	


Angle	5AX-DD201AF3	5AX-DD201BF3
-45° \( \) 45°	φ285————————————————————————————————————	φ <u>250</u>
-90° \$ 90°	φ285 φ210	φ <u>250</u>
-110°	20° 20° 20° 4240 22° 4260 22° 4260 2	φ250 & φ210 & β

<sup>\*1</sup> Air Intensifying Booster system is available if the supplied air pressure is under 0.5MPa or the brake torque is required to increase. 🗃 P.91

<sup>\*2</sup> Show the figures with cooling system. Please be careful that cooling by the special liquid may not be good for the chiller system. When cooling system is used, please check the cooling system, and stop the DD motor when the unusual condition is found.

# ROTARY TILTING TABLE with HIGH-SPEED DD MOTOR WIKKEN

### 5AX-DD201BF3-HSR PAT.

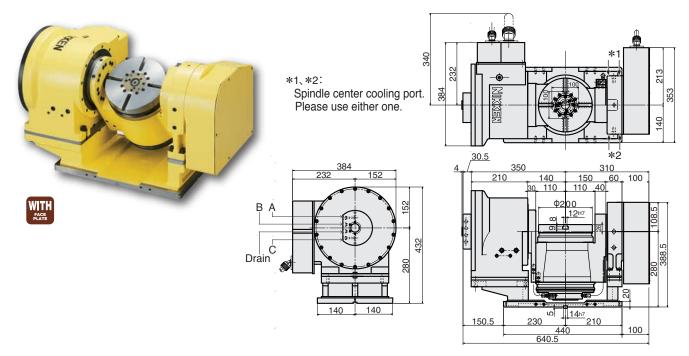


# Combining 5AX-DD201BF3-HSR table with NIKKEN Turning KIT (option), FANUC ROBODRILL enables turning operation.

- High speed rotation of 1,500 r/min on the rotary axis enables turning operation.
- Spindle center cooling system is built, suppresses temperature rise during continuous turning operation.PAT.
- 3-port rotary joint and drain port are standard. PAT.

  The A and B ports are for hydraulic use only, and oil will be collected from the drain port to returned to the hydraulic tank. The C port is for pneumatic use only.

Item / Code No.		5AX-DD20	1BF3-HSR	
Diameter of Table	Фmm	200		
Center Height (90deg	) mm	28	30	
Table Height in Horizontal Po	sition (0deg) mm	30	06	
Width of T Slot	mm	12	H7	
Axis		Rotary	Tilting (0∼110°)	
Clamping System		Pneumatic	Pneumatic	
Clamping Torque	Nm	150	500	
Motor (FANUC)		DiS60/1500-B	Dis180/800-B	
Amplifier capacity	А	80	80	
Encoder		αiCZ	512A	
Min. Incremental		0.001		
Rotation Speed	r/min	1500	150	
Indexing Accuracy	sec.	±10	±15	
Net Weight	kg	24	40	
Max. Work Load 0∼30deg. kg		30	*1	
Max. Torque	0∼90deg. Nm	140	400	
Constant torque	Nm	60*2	75/180* <sup>3</sup>	
Required cooling cap	acity W	1800	1600	



★NIKKEN Turning KIT is a set of optional accessories that includes an anti-rotation block and its control system.

<sup>\*1</sup> Max. work Load: 7.5kg Max. work inertia: 9.3×10<sup>-3</sup> kg·m<sup>2</sup>.

<sup>\*2</sup> The motor for the rotary axis needs cooling. Please prepare a cooling device (chiller) for operation. Cooling oil may be restricted by the cooling device, so select it appropriately. Cooling should be implemented with a system that continuously monitors the cooling system status and stops the system in case of abnormalities.

<sup>\*3</sup> This value applies when the table body is cooled with coolant.

# **Notice on the Use of DD TABLES**




### DD table characteristics


- The spindle is linked directly to the motor for excellent responsiveness. As a tradeoff for this responsiveness, the system is very sensitive to external force and loads, so it is necessary to set suitable parameters for each application.
- Adjustment is necessary to perform 5-axis simultaneous machining (synchronized machining). The NIKKEN standard parameters can be used for indexing and positioning. After confirming with the machine manufacturer that optional functions\* for synchronized machining are available, it is necessary to make appropriate settings to satisfy the customer's machining time and machining precision requirements. For simultaneous operation, suitable settings must be made to align the 4th (5th) axis with the three basic axes (XYZ).

### Clamping operation

Due to the characteristics of the DD table it can be turned easily by hand if power is not being supplied (free run state). The table will again be in the free run state when the servo turns off after the brake is applied, unless appropriate settings are made, and this can cause positioning inaccuracy. Consult with the machine manufacturer to ensure that the timing is as shown in the timing chart below to prevent a free run state from occurring.

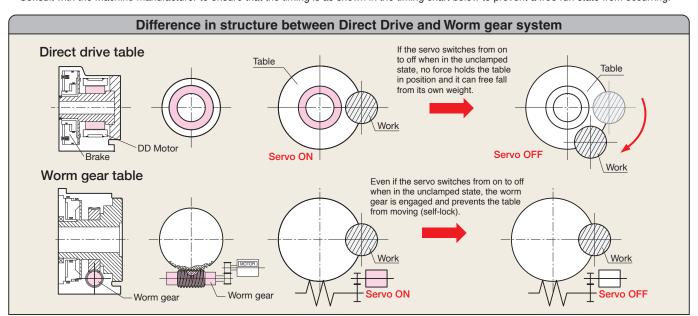

- Preventing emergencies (in case of power interruption) Configure a pneumatic (hydraulic) circuit (off-clamp) that will provide an effective brake should an emergency stop occur. Unlike normal clamping operation, in an emergency stop the brake is applied at the same time that the servo turns off momentarily, and this can result in positioning inaccuracy on an axis carrying a large load, such as the weight axis. To prevent this, enable the brake control function (FANUC), vertical axis drop prevention function (Mitsubishi), etc.
- Brake control function To prevent the fall of the weight axis when an alarm is generated or an emergency stop occurs, instead of stopping excitation of the motor immediately, excitation of the motor continues for the duration specified by a parameter to allow the mechanical brake to engage
- Shaft core cooling system PAT. In the case of a DD table for turning ,there is also a system that forcibly cools from the center of the table in order to suppress the thermal displacement of the DD table itself.

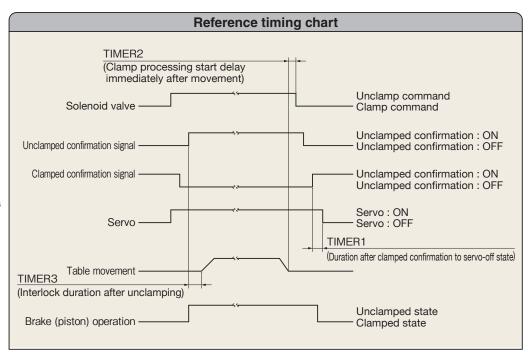

### Cooling of Direct Drive Servomotor

Except for some types of direct drive servomotor, you can choose no-cooling or liquid cooling. Keep cooling makes it possible to use under continuous rating torque. However, the special care is required because the continuous rating torque may fluctuate depending on the cooling condition.

External cooling devices should be prepared for cooling, such as chiller unit which is normally used for high speed spindles. Oil cooling must be used; water cooling is not allowed to prevent the rust. Recommended cooling oil is [ISO VG2] equivalents. (Ex. IDEMITSU "SUPER MULTI 2")


- •In the case cooling is needed: ① Long time continuous running under high (close to maximum) speed rotation ② Very long time running under overload (above rated torque-below maximum torque) ③ Using special super-high speed servomotors
- •Examples of cooling needed: ① Always-servo on under high-load condition (continuous turning operation) ② No-brake or the configuration that the servo is not off when clamping (Note: NIKKEN default configuration is servo OFF when clamping)


●Examples of cooling NOT needed: ① Indexing only ② Special use considering overload duty characteristics during non-cooling


Please feel free to contact us if you need any concerns of questions regarding cooling or if you use direct drive rotary table under special conditions


# **BUILT-IN BUILT-IN type CNC ROTARY TABLE**

External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).








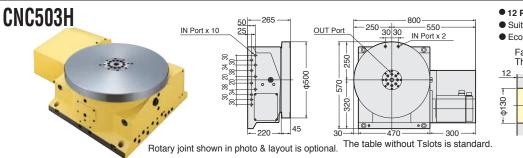

B-type and T-Type are now available. Please contact us for more detail.


### 12 Ports Rotary Joint is optional.


- Suitable design for easy maintenance
- Economical price due to standardization
   Face Plate





# **CNC802**

### Ultra Big Bore (\$\phi270mm\$) Specification ★ Built-in type rotary joint can be mounted on CNC802 refer to \$\mathbb{C}\$P.82









### Specifications Built-type CNC Rotary Tables are all semi-standard models. Please contact us.


( ):High Speed type Please contact us.

Item / Code No.		CNC400H CNCZ400H	CNC503H CNCZ503H	CNC802
Diameter of Tab	ole ¢mm	Ф400	Ф500	Ф800
Diameter of Spine	dle Hole	Ф105н7	Ф105н7	Ф270н7
Clamping Syste	m 3.5MPa	Hydraulic	Hydraulic	Hydraulic
Clamping Torqu		1760	1890	7000
Table Inertia at Motor S	Shaft $\left(\frac{GD^2}{4}\right)$ kg·m <sup>2</sup> ×10 <sup>-3</sup>	2.8	8	5.3
Servo Motor	r/min	α iF12 •2000	α iF12 •2000	α iF22•2000
MIN. Increment		0.001°	0.001°	0.001°
Rotation Speed	r/min	22.2 (44.4)	16.6 (33.3)	5.5
Total Reduction	Ratio	1/90 (1/45)	1/120 (1/60)	1/360
Indexing Accura	acy sec	20	20	15
Net Weight	kg	295	400	1100
MAX. Work Load on the Table	Horizontal kg	500	1000	3000
MAX.	N	53100	63720	247920
Thrust Load applicable on the Table	*1 FXL N·m	2648	3531	8563
on the Table	FXL N·m	3840	5990	36260
MAX. Work Inertia	$\bigoplus_{+}^{\square} \left(\frac{\text{GD}^2}{4}\right) \text{kg·m}^2$	16.6(8.3)	32.5(16.3)	234
Driving Torque	₩ N·m	432 (345)	576 (460)	3168

# **BUILT-IN type TILTING ROTARY TABLE**




External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).

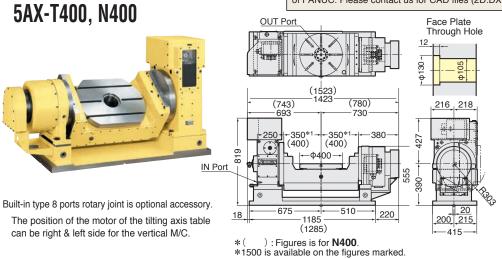

Example when the tilting base is supplied.

5AX-N400




# Tilting base will be supplied from M/C builder.



5AX-B450

Built-in type 17 ports rotary joint is optional accessory.

The position of the motor of the tilting axis table can be right or left side for the vertical M/C.



When only tilting axis is needed, an extended work piece can be machined.

5AX-T400-780

Item / Code No.	5AX-	T400 N400	5AX-B450		
Diameter of Table ¢mm	40	00	500		
Diameter of Spindle Hole \$\phi\$mm	ф10	05н7	Ф155н	7 ф109	
Center Height (90°) mm	3	90	280	<sub>0</sub> *1	
Table Height in Horizontal Position ( 0°) mm	3:	90	280	o*1	
Width of T Slot mm	14 0	0.018	-	-	
Axis	Rotary	Tilting	Rotary	Tilting	
Clamping System 3.5MPa	Hydraulic	Hydraulic	Hydraulic	Hydraulic	
Clamping Torque N·m	1760	1760	1760	3870	
Table Inertia at Motor Shaft (GD <sup>2</sup> /4) kg·m <sup>2</sup> ×10 <sup>-3</sup>	2.8	2.44	2.8	2.9	
Servo Motor r/min	αiF12 •2000	aiF22 •2000	αiF12 •2000	aiF22 •2000	
MIN. Increment	0.001°	0.001°	0.001°	0.001°	
Rotation Speed r/min	22.2	16.6	22.2	16.6	
Total Reduction Ratio	1/90	1/120	1/90	1/120	
Indexing Accuracy sec	15	60	20	60	
Net Weight kg	750( <b>w/c</b> 995( <b>wit</b>	,	1050( <b>w</b>	1050( <b>w/o base</b> )	

Item /	Code No.	5AX-T400 N400	5AX-B450
MAX. Work Load	0° to 30° kg	300	300
on the Table	30° to 90°	250	250
	Tilting Angle = 0°	31360	31360
MAX. Thrust Load	Tilting Angle = 0°	L=200mm F=6860N	L=250mm F=5488N
applicable on the Table	Tilting Angle = 90° Fi F2 + C	L=100mm F=11660N	L=100mm F=11660N
	Tilting Angle = 90°	1166	1166
MAX. Work Inertia	$+ \frac{1}{\left(\frac{GD^2}{4}\right)} \frac{1}{\log m^2}$	5.1	5.1
Driving Torque	N·m	432	432



# **Servo Motor List**

### **Maker and Motor Model**

Stall	Torque		1 Nm	2 Nm	3 Nm	6 Nm	12 Nm	22 Nm
Rotation Speed		2000r/min	2000r/min	2000r/min	2000r/min	2000r/min	2000r/min	
Maker		Model 1	Model 2	Model 3	Model 6	Model 12	Model 22	
FANUC			<b>≪</b> iF1/5000	<b>X</b> iF2/5000	<b>≪</b> iF4/5000	<b>≪</b> iF8/3000	<b>X</b> iF12/4000	<b>X</b> iF22/3000
			<b>X</b> iS2/5000	<b>∝</b> iS4/5000	<b>X</b> iS8/4000	<b>X</b> iS12/4000	<b>α</b> iS22/4000	<b>X</b> iS30/4000
			βiS2/4000	βiS4/4000	βiS8/3000	βiS12/3000	βiS22/2000	
			HF75T	HF105T	HF54T	HF104T	HF204S	HF354S
ME	MELDAS				HP54T	HP104T	HP204S	HP354S
			HG56T	HG75T	HG104T	HG154T	HG204S	HG354S
			SGMPH-04AAA6S	SGMPH-08AAA6S	SGMGH-05ACA5S	SGMGH-09ACA5S	SGMGH-20ACA2S	SGMGH-30ACA2S
YA	YASNA		SGMAV-04A3A6S	SGMGV-03A3A6S	SGMGV-05A3A6S	SGMGV-09A3A6S	SGMGV-20A3A2S	SGMGV-30A3A2S
			SGM7A-04A7A6S	SGM7G-03A7A6S	SGM7G-05A7A6S	SGM7G-09A7A2S	SGM7G-20A7A2S	SGM7A-30A7A2S
	OSP2			BL-MC24J-30S	BL-MC25J-30T	BL-MC50J-30T	BL-MC100J-20S	BL-MC200J-20S
	OSP3			BL-ME24J-50SN	BL-ME40J-40TN	BL-ME80J-40TN	BL-ME100J-30SN	BL-ME200J-20SN
OSP	OSP4	DLD		BL-ME24M-50SN	BL-ME40M-40TN	BL-ME80M-40TN	BL-ME100M-30SN	BL-ME200M-20SN
	OSP4	IEW			BL-MT40M-40TN	BL-MT80M-40TN	BL-MT100M-30SN	BL-MT200M-20SN
	OSP5				BL-MT40M-40TN	BL-MT80M-40TN	BL-MT100M-30SN	BL-MT200M-20SN
					MFA055MBJNC1	MFA100MBJNC1	MFA180MBJNB	MFA350MBJNB
TO	SNUC		MDM032R4L	MDM062R4L	MDM052R4L	MDM152R4L	MDM212R4C	MDM402R4C
10.	SNUC				MHMA052K2LA	MHME102F2CA	MTMA402F2CA	MTMA552F2CA
			MHMD482S1C	MHMD082S1C	MHME102SCC	MHME152SCC	MHME302SCC	MHME402SCC
Brother	SANYO	)*1	R2AD08040FXPGA		R2AAB8100HXPGA			
Brother	SANYO	)* <sup>2</sup>	R2AA08040FXR5E		R2AAB8100HXRGA			
SIE	MENS		1FT-6031-4AK71	1FT-6034-4AK71	1FT-6044-1AK71	1FT-6064-1AK71	1FT-6082-1AF71	1FT-6086-1AF71
SIL	IVILI43			1FK-7042	1FK-7060	1FK-7063	1FK-7083	
HEID	ENHAIN			QSY96A	QSY116C	QSY116E	QSY155B	QSY155D

<sup>\*1</sup> The end of the rotary table Code No. is "SA-BR2"

<sup>★</sup>Other servo motor can be mounted, please inform us the external dimension, specification of your servo motor.



# Relation between Unbalancing Load and Servo Motor **NIKKEN**




This table shows the guide line. Please make the unbalancing load as small as possible to use the counter balance weight for the precision machining.

Excessive unbalancing load causes the indexing accuracy and the durability to be worse. The relation between the guide line of the unbalancing load and the servo motor shows below. Please do not apply the load exceeding the guide line.

CNCZ series table can not be recommended for the application with large unbalancing load. CNCZ series table is recommended for the application only with light load.

Please inform us the detail of the component, jig fixture, indexing time etc. prior to your order. Then, the calculation of the load is studied and the best suitable rotary table (including the suitable motor) for your application is proposed. The



### Guide Line of MAX. Unbalancing Load for Additional Axis Control Please contact us for the other maker.

FANUC motor is described.

MAX. Unbalancing Load (N·m)	CNC180FA	CNC202FA	NCT200(E)FA	CNC302FA	CNC <sub>401FA</sub>	CNCB450FA	CNC <sub>601FA</sub>
30	≪iF2						
50	≪iF4	≪iF4					
60			≪iF4	≪iF4			
100				≪iF8	≪iF12		
150						≪iF12	
200					≪iF22		≪iF12
300						≪iF22	
400							≪iF22

### Guide Line of MAX. Unbalancing Load with NIKKEN Controller

MAX. Unbalancing Load (N·m)	CNC180	CNC202	NCT200	CNC260(P)	CNC302(P)
10	CNC180AR21-04				
20	CNC180AR21-08	CNC202AR21-08	NCT200AR21-08		
30				CNC260AR21-08	CNC302AR21-08
50	CNC180AR21-06	CNC202AR21-06			
60			NCT200AR21-06	CNC260AR21-06	CNC302AR21-06

<sup>\*2</sup> The end of the rotary table Code No. is "SA-BR3"

<sup>★</sup>The characteristics(stall torque, MAX. torque and rotor inertia etc.) of the servo motors differ, therefore the specification of CNC rotary table will be a little different.

# Flow Chart of the Additional Axis Control



Servo enable is basically kept OFF during the mechanical brake clamps. Servo enable is recommended to be kept ON, even when the mechanical brake clamps for the CNC rotary tables listed in the box below. But, the case when a big electric current always flows in the motor due to the heavy unbalancing load, please keep servo enable OFF when the mechanical brake clamps.


- ·CNC321, 401, 501, 601, 802, 803
- ·CNC400H, 503H
- ·5AX-250 (Tilting)
- ·5AX-T(N)400 (Rotary. Tilting)



Please specify the brake control when ordering

- ·Type of solenoid valve (AC100V or DC24V)
- ·Motion of solenoid valve for clamp (ON: Clamp, OFF: Clamp)

#### Flow Chart of the Additional Axis Control

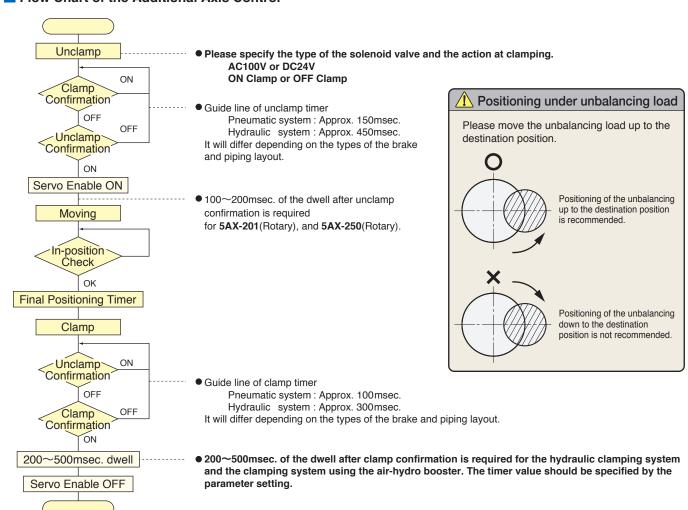





# **Indexing Time**



Guide line of the indexing time is shown. The indexing time will be different according to the total reduction ratio, motor rotation speed, servo parameter setting and the piping of the brake circuit. Please contact us for more detail.





# M-signal CNC ROTARY TABLE with AR21 CONTROLLER

- Minimum Command Increment: 0.001° or 1sec.

  AR21 controller can drive all models of NIKKEN CNC rotary table.
- Single M signal provides Various Automatic Operation.

  Any unequal dividing, equal dividing, arc cutting, lead cutting etc.

  can be done very easily.
- USB interface as standard equipment

  By connecting to a PC, program data and parameters can be input and output.

  (However, communication software is required on the PC side.)
- Upgrade of Water Proof Characteristic EMC Assessment ☞ P.103

The direct out type connection is applied for all models of CNC rotary table, and the EMC assessment is satisfied as the total system.

Digital Servo System & Absolute Encoder

Very excellent acceleration/deceleration characteristics, the powered up torque and the best suited servo parameter realize the high quality and long life.

after Power ON or after releasing the emergency stop condition is not necessary.\*

Plenty of Optional Functions

True Closed Loop, Manual Pulse Generator, M Function (Input: 5/ Output: 5), External N Number Search, External Position Display, External Power ON/OFF, Pitch Error Compensation

More than 30,000 sets working in the field.

This fact ensures the highest reliability.

Product compatible with ROHS2-10 commands

The AR21 controller is now ROHS2-10 compliant and has the product code AR21, which can be shipped to EU member countries.(400W,750W,1.3KW,1.8KW)

\*: The operation to establish the coordinate system is required at once, when turning the POWER ON at first time just after connecting the cable. Please refer to P.62



AR21 controller

- Standard (400W, 750W)= 300×280×285 10kg
- · Single Phase AC200/220V




AR21 PW controller • Power up (1.3KW, 1.8KW) 540×360×400 28kg

· 3 phase AC200/220V



AR21 controller for larger capacity

- · 4.4KW is available.
- · 3 phase AC200/220V

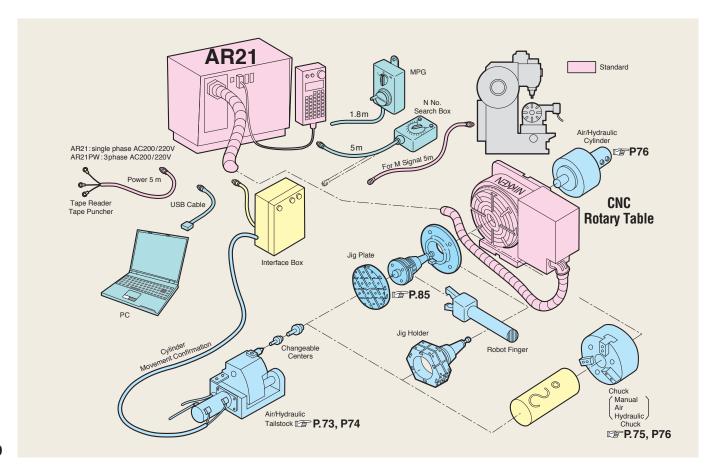

# **AR21 CONTROLLER Specification**



### Main Specification of Controller (NIKKEN-AR21 controller)

Item	Specification	Remarks
MIN. Increment	0.001° or 1 "	Free Selection
MAX. Programmable Angle	±9999 rotation, ±999.999° & ±999°59'59"	Free Selection
MAX. Equal Dividing	2~9999 equal dividing	
Program Capacity	1000 Blocks	N000~N999
Input System	MDI Key Board, Pendant type	
Programming System	Combined use of Incremental/Absolute	Free Selection of G91 / G90
Zero Return	Machine Zero Position/Work Zero Position can be commanded from out	
Manual Feed	Rapid Feed/Fine Feed/Step Feed/Continuous Feed	
Uni-directional Positioning	Uni-directional Positioning can be done to eliminate the mechanical backlash.	G14
Emergency Stop	Whole system stops	can be commanded from outside.
Feed Hold	Table rotation temporarily stops.	can be commanded from outside.
Jump Function	Jump to sub program etc.	
Repeating Function	By specifying start No. and final No., multiple sequence are repeated.	
Buffer Function	Reading next block, and execute job without stop.	Useful for lead cutting etc.
Dry Run	Table always rotates in rapid feed for checking.	
Key Lock Function	Even if operation button is pressed by mistake, such command is neglected for safety.	
Preparatory Function	Dwell, Clamping/Unclamping, Lead Cutting	G04~G92
G1 Code, G2 Code	2 kind of G codes can be entered in one block.	
Block Data display	At programming, previous block data or next block data are displayed.	
USB Interface	Program data and parameters can be input and output.	
Software Limit Function	± stroke limit values can be set by parameter.	
Over Travel Detection Function	Over travel detection zone can be set at outside of software limit by using control circuit, and the CNC rotary table can be protected not to exceed safety zone.	Standard for 5AX- type tilting axis
Alarm No. Automatic Indication Function	When alarm is detected, controller automatically goes to diagnosis mode and Alarm No. is displayed.	When duplicated, it flickers every 2 sec.
Alarm Out	Alarm condition of AR21 can be sent to M/C	
Emergency Stop Out	Emergency stop condition of AR21 can be sent to M/C.	
Self Diagnosis Function	Inside situations of controller can be seen.	
Modal G Code Flicker Function	All G codes used in program are indicated in flickering.	Every 2 sec.
Pitch Error Compensation Function	Rotary axis: 15° unit, Tilting axis: 5° unit	Option
Feed Rate Override	5~200%,999% (Rapid feed)	±5%
Input Signals	1 kind of Auxiliary Function.(Automatic operation can be done by only one M signal.)	With or without contact signal *1
Output Signal	1 Block Finish signal, Work Zero Position Signal, Alarm Out Signal *2	Ask Time Chart
Servo Motor	AC servo motor with serial encoder	
Input Power	AR21: Single phase AC200~220V, 50Hz / 60Hz	400W:480VA*3,750W:760VA*3
	AR21 PW:3 phase AC200~220V, 50Hz / 60Hz	1.3kW:960VA*3,1.8kW:1.2KVA*3
A. A. M. Sinor al. of MA/O in control and colored	a black with and DEM (Distribution Food)	# O lancet land a security at 400/ af

<sup>\*1:</sup> M signal of M/C is valid only the block without DEN (Distribution End).

\*3 Input load capacity at 40% of average load factor.

#### OPTIONAL SPECIFICATION

#### 1 True Closed Loop

This is to be used for ultra precision rotary table.

# 2 Manual pulse generator (X1, X10, X100)

This pulse generator enables the table to be rotate or tilted by manual operation on every 0.001∼0.1° unit.

#### 3 Five M functions

Control and confirmation of other actuator (hydraulic tailstock, coolant controller, robot etc.) can be done from AR21side.
AR21 for AWC, this is included as standard.

#### 4 External N Number Search Function

When plural programs are entered in 1000 blocks. Desired N number can be searched from outside (applicable also to FMS line).

#### 5 External Power ON/OFF

Interface to perform Power ON/OFF by external circuit is available.

#### 6 Pitch Error Compensation

Rotary Axis:

by 15° unit  $\times$  24 points Tilting Axis:

by  $5^{\circ}$  unit  $\times$  24 points The optimum correction value is adjusted and shipped with increased indexing accuracy.

#### 7 Output Signal \*2

Work Zero position signal is the signal set to ON while the CNC rotary table is in the work zero position. Alarm Out signal is the signal set to ON when AR21 is in alarm condition. These signals can be used for interlocking function.

# 8 Direct Angle Command Interface

By connecting the machine side RS232C interface to the AR21 controller, it is possible to manage all the programs of the AR21 controller.
For details, please refer to page 76.

#### 9 Harting Connector Type

Harting Connector can be corresponded to the CNC Rotary Table side. The AR21PW controller is not compatible.




<sup>\*2:</sup> Work Zero Position Signal and Alarm Out Signal are optional signals.

# **Explanation of PENDANT 1**







(2) Emergency Stop Button

**- | | | + |** 34 Manual Jog Button

5 High Speed Button

(6) Auto/Manual Select Switch

7 Edit/Current Position Select Switch

(START (8) Start Button

9 Stop Button

10 Continuous Feed Button

ORG (11) Original Point Set Button

12 Machine Zero Return Button

(3) Work Zero Return Button

DGN (14) Diagnosis Button

1 1 15 Increment/ Decrement of Block No.

(16) Feed Rate Override Button OVR OVR

17 Reset Key

• **READY** ······Turned ON when input power is supplied. ● COM.····Turned ON while AR21 main unit and the

pendant are communicating.

● ALARM ······· Turned ON when AR21 is in alarm condition.

● COM . ALARM ···· Turned ON when communication time out error occurs between AR21 main unit and the pendant.





#### 1 Power Switch



ΗΙ



# 2 Emergency Stop Button

### **34 Manual Jog Button**

▶ + Clockwise, - Counter clockwise. While this button is being depressed, the table continually rotates slowly. When this button is depressed once, the table steps by 0.001°(1").

### 5 High Speed Button

When this button is depressed together with ③ or 4, the table rotates in rapid feed. When jog 11 while depressing 5, table moves

as following;

Gear Ratio	Table Movement
1:720	0.5°
1:360	1.0°
1:180	2.0°
1:120	3.0°

Gear Ratio	Table Movement	
1:90	4.0°	
1:60	6.0°	
1:45	8.0°	

#### 6 Auto/Manual Select Switch

When this button is turn to Manual, all buttons are workable.

When this button is turn to Auto, all other buttons except (1,2,6,8,9,4,6,7) are ineffective.

#### **7** Edit/Current Position Select Switch

On  $\theta$  of  $\circledR,$  programming or present position is displayed alternatively.



#### Start Button

The table rotates as programmed.

### 9 Stop Button



STOP

CF

AUT

MAN

The table slows down and stops. (Feed Hold Function). When ® is depressed again, the table rotates the remaining angle of the

#### 10 Continuous Feed Button

When this button is depressed, the table rotates continually. And, when (9) is depressed, the table stops. The desired feed and direction are to be input in N997 Block. (Refer P.53 ®)

### 11 Original Point Set Button

When this button is depressed at any angle, the position display shows 000.000°, and it is used as the work zero position. When the cumulative angle becomes 360°, work zero position signal is sent, which can be used as interlock.



M ZRN

12 Machine Zero Return Button When this button is depressed, the table returns to the machine zero position (0° of the graduation of the table) clockwise in rapid feed, then low speed for final positioning.

# W ZRN

#### **13 Work Zero Return Button**

When this button is depressed, the table returns to the position set by (1) clockwise in rapid feed.



**14** Diagnosis Button

# (5) Increment/Decrement of Block No.



Previous block data and next block data are displayed.



OVR

+ OVR



POS mode: Increasing feed rate 5 to 200% every 5% → Rapid feed (999).

PRM mode: Displays the following parameters sequentially.

POS mode: Decreasing feed rate 200 to 5% every 5%.

PRM mode: Displays the proceeding parameters sequentially.






This is for calling N000 and also for resetting alarm display etc.

# **Explanation of PENDANT 2**



Display



N: Sequence No. N000~N999

NRS: Direct angle command interface is selected.

N': Jump & Return J000~J999, RET

θ : Rotation angle of table (Decimal, Sexagecimal) 0~±999.999° (Decimal)

0~±999.59'59" (Sexagecimal) D: Equal division (divided by 2 to 9999)

F: Feed rate

Cutting feed: 0.01~9.99r/min

Rapid feed: 000

G: Preparatory function G01~G92 Two kind of G codes (G1, G2) can be input in one block.

%: Feed rate override

(5% to 200%, or 999 for rapid feed rate)

P: Starting block No. of repeating function (G27)

Q: Final block No. of repeating function (G27)

L: Repeating frequency (G27)

INC/ABS: INC (Incremental)

ABS (Absolute)

MODE: EDT (Edit mode)

MAN (Manual mode)

AUT (Auto. mode)

MPG (MPG mode) **DGN** (Diagnostic mode)

#### ZRN-MW

M Flickering (Returning to M ZERO)

M (Stop at M ZERO)

W Flickering (Returning to W ZERO)

W (Stop at W ZERO)

START/STOP: START (Starting)

STOP (Stop)

**Key Encoder** 

For calling a certain sequence, input the number after this key so that the program of the block is display, also you can start from the program.

This key is to be used when you want to call sub program N' or jump to N' after N block is completed.

When sub program is finished, enter R at ® N' display. And, it returns to the block next to the one where J' was commanded in the main program.

θ : You can input 0° to ±999.999° in 0.001° increment, or  $0^{\circ}$  to  $\pm 999^{\circ}59'59"$  in 1" increment.

The selection of decimal or sexagesimal system is set up by parameter.

In case of Dwell Instruction (G04), the waiting time is inputted. (0.001 to ±999.999 sec.).

P: Starting number of repeating function (G27) 000 to 999.

**DIV**: Automatic equal dividing times 0 to 9999. Lead cutting instruction (G07) 0 to 999.

Q: Final number of repeating function (G27) 000 to 999.



F: Cutting feed F001(0.01 r/min) to F999(9.99

Rapid feed F000 or F0. L: Repeating frequency 0 to 999.

Without G: Positioning

G

G21 : Simultaneous start G22: Continuous start

G04: Dwell G23: Machine zero point return G06 : Constant acceleration G07: Rotation number G24: Work zero point return \* G08: Buffer commencing G27: Repeating function

\* G09 : Buffer ending G28: Programmable machine \* G10 : Brake unclamped Pzero position return \* G11 : Brake clamped \* G90 : Absolute command

G14: Uni-directional positioning \* G91 : Incremental command \* G15: Droop check G92: Coordinate system setting

\* G16: Droop cancel

M Function (Option)

G60~G74: Activate an actuator

#### How to enter G code:

0 cannot be suppressed for both G1 and G2 codes. For example, when G1=07 and G2=08, enter them

G0708\*

and indication will become as;





When you want to enter 9°, just depress keys as  $\Theta \rightarrow \Theta \rightarrow \bullet$ , and 9.000° or 9°00′00″ is displayed.



This is for command of Counter clockwise rotation.

INPUT

This is depressed as programming of each block being completed.

(Hereafter shown as \*).



For deletion or alternation of  $\theta$ , DIV, or F individually, just depress  $\theta$ , DIV, or F, then depress. Also when you depress \* with pressing C, complete one block is deleted.

### Deleting successive blocks

For example, in order to delete blocks from **N000** to **N999** push keys N0 -999 at Edit mode, and jog while depressing ckey.

means optional function.

Operation of the pendant of AR21 controller for tilting axis specification and for NSV index specification differs, please refer instruction manual.

### Caution for AR21 Controller

- The alarm regarding the absolute encoder will be appeared, when turning the POWER ON at first time just after connecting the cable. This is because the coodinate system is not established yet. Please try as follows;
  - Return to pervious mode.
  - PRM#110=1 Writting parameter value enable.
- $G_{NO}$  7 2  $A_{DATA}$  1 PRM#72=1
- · Turn the POWER OFF and ON
- For rotary axis MZRN Execute machine zero return.

For tilting axis

First set the temporary machine zero position and [M]. Please refer instruction manual for more detail.

 When the alarms regarding the absolute encoder such as ALARM#1101 or #1102 are appeared, please set PRM#71=1 and turn the POWER OFF and ON to establish the coodinate system again.



Ν

(3digits)

J

(3digits)

RET

| **=** 

 $\theta$  (±6~7digits)

P (3 digits)



# **Operation & Confirmation of PROGRAMS**




### Operation of Keys.

Before programing, be sure that mode is EDT.

Before start the programs, push II ..... or II ..... in EDT mode, and confirm input date.

Then start the program in MAN mode to confirm the moving.

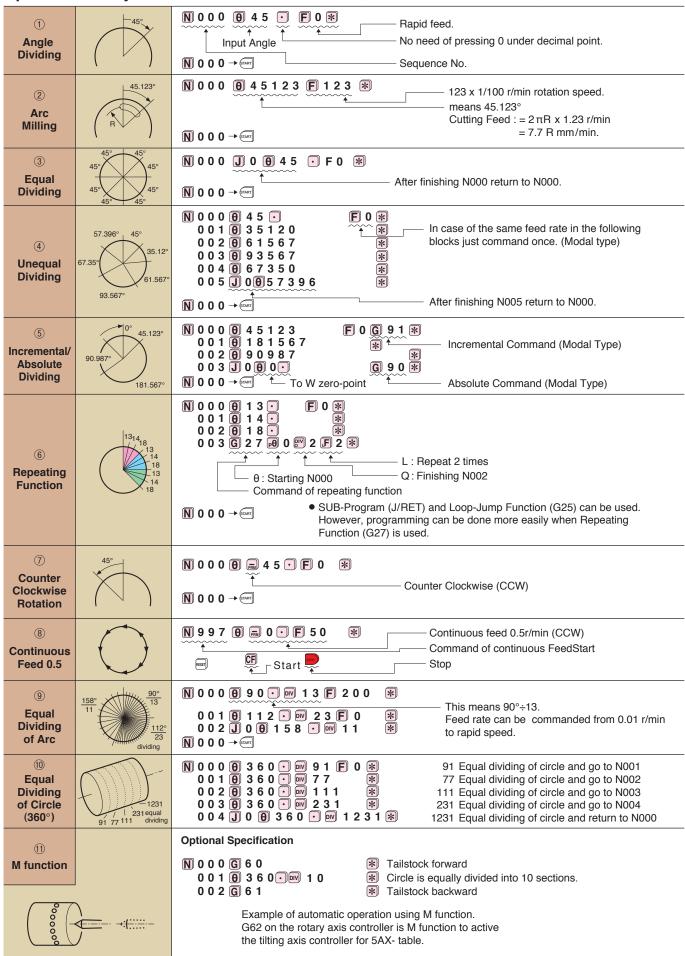

# **Example of PROGRAMS**





### Program of NC Machine

0 0 0 0 0; ... Main program
 M 9 8 P 0 1 0 0 L 2 3; ... Drilling cycle 23 times
 M 9 8 P 0 1 0 1 L 2 3; ... Tapping cycle 23 times
 M 0 2;
 0 0 1 0 0; ... Sub program 1
 G 0 1 Z — ; ... Drilling fixed cycle
 M 2 1

M 2 1; -----M 9 9; 0 0 1 0 1;···Sub Program 2

G 0 1 Z — ;···Tapping fixed cycle

M 2 1; M 9 9;

0 0 0 0 3;

### **2** Example for Arc Milling


Program of NC Machine0 0 0 0 1;

### **3 Example for Lead Cutting**

Program of NC Machine

M 2 1; G 0 1 Z — ;···Z axis down M 2 1; M 2 1; G 0 1 X 4 0. F 1 0 0;\*1 ←---G 0 0 Z — ;···Z axis up M 2 1;


### Program of AR21



23 equal dividing on circle for drilling & tapping


When NC Machine executes the sub program 23 times, drilling & tapping of 23 holes is completed with 23 equal divisions calculated to 1/23rd of 360° to third decimal places automatically, e.g. 15.652°.

### Program of AR21



### Program of AR21





### Calculations for Feed Rate in Lead Cutting

- 1. Make a development elevation like **Fig.2** to calculate the vector.
- 2. Give feed in lead cutting (cutting feed from ① to ②).....e.g. 200 mm/min (depend on work piece materials).
- 3. Cutting speed of X axis: Fx= 200 mm/min x 40 mm ÷ 80mm =100 mm/min F100 \*1
- 4. Cutting speed of  $\theta$  axis:  $f = 200 \text{ mm/min x } 69.2 \text{ mm} \div 80 \text{mm} = 173 \text{ mm/min}$

173 mm/min x 1r/min ÷ 314 mm/min =0.55r/min F55 \*2

# **4 Example of continuous rotation** as turning operation

Program of NC Machine

0 0004; : M21:5

M 2 1 ; Start continuous rotation

X & Z Contouring

 ${f M\,2\,1}\,$ ; Stop continuous rotation

M 21; Machine zero position return with dog

#### Program of AR21


N 030 G 22 \*

·····Continuous rotation

N 031 J 30 G 28



Programmable machine zero position return with dog




The direction and feed rate of continuous rotation are specified on N997. When higher rotation speed than standard is required, please contact with us.


# **CNC ROTARY TABLE with AR21 CONTROLLER**




# CNC105AR21-04









Powerful Clamping Torque: 205Nm



Air purge function is provided.

CNC180AR21-04



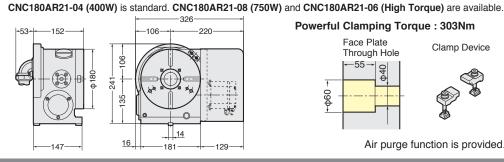


Powerful Clamping Torque: 303Nm Face Plate Clamp Device Through Hole -55

Air purge function is provided.

CNC202AR21-08



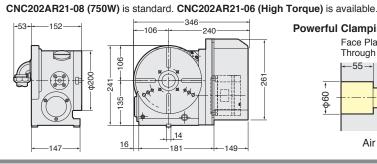

Powerful Clamping Torque: 303Nm Face Plate Clamp Device Through Hole






Air purge function is provided.


CNC205AR21-05



Rotary joint shown in photo is optional.

NC202AR21-05 (450W) is standard. ★Built-in type rotary joint 6+1 can be mounted.







Air purge function is provided.


# NCT200AR21-08









Powerful Clamping Torque: 900Nm





Air purge function is provided.

#### CNC260AR21-08, 302AR21-08 CNC260, 302AR21-08 (750W) is standard. CNC260, 302AR21-06 (High Torque) is available.










# **CNC ROTARY TABLE with AR21 CONTROLLER**





# CNC321, 401AR21-18




Rotary joint shown in photo is optional.

### ★Built-in type rotary joint can be mounted, refer to **P.81**










Please contact us for the dimension of CNC321AR21-18.

# CNC501, 601AR21-18




★Built-in type rotary joint can be mounted, refer to **P.81** 







★ Please contact us for the dimension of CNC501AR21-18.

# CNC1000, 1200AR21



Center socket shown in photo is optional.







- ★ Ultra precision of ±3sec. is available as an option.

  There is no through hole on the rotary table due to the rotary encoder for ultra precision option.
- ★ Please contact us for the dimension of CNC1000AR21.
- ★ Code No. will be varied according to the servo motor capacity. e.g CNC1000AR21-44 (4.4KW Motor)

### CNC1201AR21









- ★ Ultra precision of ±3sec. is available as an option.

  There is no through hole on the rotary table due to the rotary encoder for ultra precision option.
- ★ Please contact us for the dimension of CNC1000AR21.
- ★ Code No. will be varied according to the servo motor capacity. e.g CNC1201AR21-44 (4.4KW Motor)

# CNC1600AR21







- ★ Ultra precision of ±3sec. is available as an option.
  There is no through hole on the rotary table due to the rotary encoder for ultra precision option.
- ★ Please contact us for the dimension of CNC2000AR21.
- ★ Code No. will be varied according to the servo motor capacity. e.g CNC1600AR21-44 (4.4KW Motor)

### The specification of the large rotary table will be varied according to your application.


- 1. With/without T slot, Width of T slot
- 2. Spindle hole dimension···Center socket for centering is normally installed.
- 3. Layout of the rotary table...Vertical use, horizontal use, vertical and horizontal use
- 4. Total reduction ratio...Suitable capacity of the servo motor can be selected.


# **Tilting Rotary Table with AR21 Controller**



### 5AX-100WAR21








Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-100WAR21-0404

# 5AX-130WAR21










Photo with φ130mm plate. Rotary axis cable stays.

Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-130WAR21-0404

### 5AX-201WAR21










Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-201WAR21-0408

# 5AX-250WAR21












Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-250WAR21-1313

# 5AX-350WAR21










Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-350WAR21-1318


# **Tilting Rotary Table with AR21 Controller**



### 5AX-550WAR21




The specification of the large rotary table will be varied according to your application.

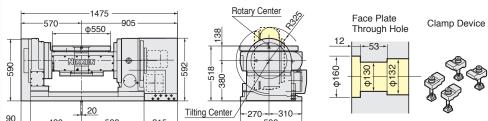

Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-550WAR21-1818

### 5AX-800WAR21






Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-800WAR21-1844

# 5AX-1200BWAR21





Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-1200BWAR21-4444

- 1. Moving angle of the tilting axis
- 2. Relation between the tilting axis center and the rotary axis



5AX-1200A: The tilting axis center is located in the same position as the center of the rotary axis body.





5AX-1200B:The tilting axis center is located in the same position as the top surface of the rotary axis.


- 3. Tilting axis base...It can be supplied to us.
- 4. With/ witout T slot, Width of T slot
- 5. Spindle hole dimension
  - ···Center socket for centering is normally attached.

# 5AX-2MT-105WAR21









Clamp Device

Motor capacity of rotary axis and tilting axis are added at the end of Code No. e.g 5AX-2MT-105WAR21-0404 If you need a knock hole for positioning or a key way on the table surface, please contact us

AR21 controller can drive the all models of NIKKEN rotary tables. Please contact us for the external dimension.



Back side motor mounted CNC rotary table





Top side motor mounted CNC rotary table

Indexing of MIN. incremental of 1° is done by AR21 controller.



Multi-spindle CNC rotary table





NST manual tilting rotary table

AR21 controller can perform indexing of MIN. 1° with hirth coupling and can also perform indexing of MIN. incremental by 0.001° and profile milling.

**NSVZ** index

NSVX rotary index table

# Technical Information of NIKKEN CONTROLLER 1 NIKKEN




#### AR21 controller connection


Normally the controller will be operated only by connecting M Signal (Start Signal) and 1 Block Fin. Signal. Emergency Stop Input must be set to B contact only for 5AX-Tables. For other Tables, you can choose A/B contact for Emergency Stop Input.

When to be connected to machine, receptacle MS3102A18-1P is provided. Arrange the electric circuits of your machine side






### Input/Output Time Chart



t1 and t2 can be set by parameter.




### Connection for Automatic Operation

Once program is loaded to AR21, all operations such as Power ON, Machine Zero Return, Program Section, Start etc. can be done by machine side. 3 sets of M signals are required for CNC rotary table and 6 sets of M signal are required for 5AX- tilting rotary table. e.g.

M21: Start Signal

M22: Program Jump (Selection) Signal M23: Machine Zero Return and Reset

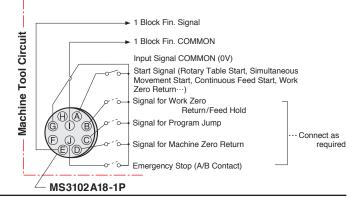

#### RS232C Automatic Loading Interface. ... Pendant is to be used for manual operation and maintenance only. (OPTION)

Program is loaded from Custom Macro of M/C, and start the program by the ordinary M signal. Total management of programs can be done on only M/C side. The necessary functions of M/C side are;

Custom Macro


Custom Macro External Output Function


2 sets of M signals

e.g.

M21: Start signal

M24 : Start signal of RS232C Automatic Loading Function (Start signal without 1 Block Fin. signal confirmation and keep this signal ON at least 100msec.)

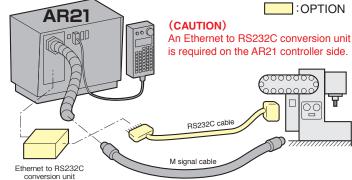

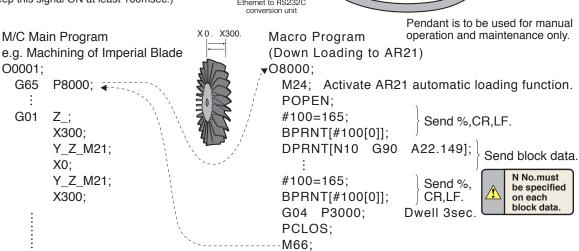

# **Technical Information of NIKKEN CONTROLLER 2 NIKKEN**




#### RS232C Direct Angle Command Interface (OPTION) JAPAN PAT.

This interface can start the block after sending one block data from custom macro of M/C. Equal dividing function (e.g. divided by 7) also can be sent. Therefore, program will be simple and more accurate and the total management of the programs can be done

Required functions at the M/C

- Custom macro
- Custom macro external output function
- 1 M signal (Start signal) M21

5AX-table with 2 off AR21 controllers can be connected to use RS232C direct angle command interface. In this case, special RS232c cable is required and 2 off M signals are required.




Pendant is to be used for manual operation and maintenance only.

DE-9P-N

DB-25P-N

#### Special cable AR21 (Male) = X21#1 RS232C interface 1 1 1 X21#2 The cable is available as an option. RD (2) 2 Baud rate: 9600 bps SD ③ 3 RD Code: ISO 4 4 RS Data bit length: 7 bits Parity bit: Even parity sg (5) (5) (5) CS-connect to RS Stop bit length: 2 bits 6 6 DR-connect to ER Parameter setting of M/C must be "LF CR" or "CR LF" SG (5) 7) (7) SG is sent at EOB sending. 8 CD-connect to ER 420 ER Call off macro program for direct angle command

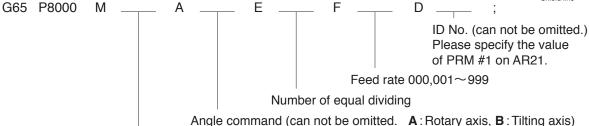

90/91 = Absolute/Incremental

M21(start) will be executed as required times after execution of macro program for direct angle command.

### Macro program for direct angle command (Example for only rotary axis control)

DPRNT [ID#7[10] A#1[43]E#8[40]]; O 8000: N<sub>6</sub> POPEN: GOTO 10: #100=165: N7 IF [#9 EQ #0] GOTO 8; BPRNT [#100[0]]; DPRNT [ID#7[10] A#1[43]F#9[30]]; IF [#13 EQ #0] GOTO 5; GOTO 10: IF [# 8 EQ #0] GOTO 3; DPRNT [ID#7[10] A#1[43]]; N8 IF [# 9 EQ #0] GOTO 2; BPRNT [#100[0]]; N10 N<sub>1</sub> DPRNT [ID#7[10] G#13[20]A#1[43]E#8[40]F#9[30]]; G04 P200: P CLOS: GOTO 10: N2 DPRNT [ID#7[10] G#13[20]A#1[43]E#8[40]]; M99: **GOTO 10:** N3 IF [#9 EQ #0] GOTO 4; DPRNT [ID#7[10] G#13[20]A#1[43]F#9[30]]; GOTO 10;



Work zero position signal and alarm out signal can be output as an option. Be careful that these signals are non-contact type output and output common line is 0V. These signals must be recieved on the relay. Please contact with us for more details.

### Termination of the maintenance work for NIKKEN controllers

The maintenance work of the NIKKEN controllers is continued as long as the electric parts could be supplied. However, about the following controllers, the maintenance has to be terminated, because the supply of the electric parts became impossible. Please examine reshuffling to the CNC rotary table with AR21 controller by all means.

Terminated at April 2005 : ND5000, 8000DC, 8800DC, 9000DC

DPRNT [ID#7[10] G#13[20]A#1[43]];

DPRNT [ID#7[10] A#1[43]E#8[40]F#9[30]];

Terminated at April 2005 : NSV controller (M signal I/F, B signal I/F)

IF [#8 EQ #0] GOTO 7;

IF [#9 EQ #0] GOTO 6;

Terminated at April 2013 : 8800DX, 8800AX, 8AC Terminated at April 2021 : NEC & controller

N4

N5

GOTO 10;

GOTO 10;

## SUPPORT TABLE

			With C	lamping	00
Table Model	Center Height	W/O Clamping	Air (0.5MPa)	<b>Hyd.</b> (3.5MPa)	Slim Spport Table With Clamping
CNC105	105	CST100-105	TAT-105N		
CNC180, 202,205	135	CST100-135	TAT-170N		TAS-100N
NCT200	135	CST100-135	TAT-170N		TAS-100N
CNC180B, 202B	180		TAT-170N*1		TAS-100N*1
CNC260, 302	170		TAT-250N(Sh	ared use Air/Hyd)	
CNC260P, 302P	170		TAT-200N(Sh	ared use Air/Hyd)*2	
CNC321	230			TAT-321N	
CNC401	230			TAT-401N	
CNC321T	240			TAT-321N*4	TAT-403N
CNC401T	240			TAT-401N*4,403N	TAT-403N
CNC501, 601	310			TAT-501N	
NSVZ180	135		TAT-170N		
NCVZ200	170		TAT-250N(Sh	ared use Air/Hyd)	
NSVZ300	170		TAT-200N(Sh	ared use Air/Hyd)*2	
NSVX400	240			TAT-401N*4	TAT-403N
DD251	170		TAT-170N*3		


TAS-100N
TAS-100N
TAS-100N*1
TAT-403N
TAT-403N
TAT-403N


- \*1 : A separate sub-base is required to align the center height.
- \*2 : The center height is possible to increase 20mm to use sub-base.
- \*3 : The support tables that can be used are subject to limitations based on the number of rotations.
- \*4 : When a sub-base is used to adjust the center height, a +10 mm variation in the specification can be accommodated.

## Compact Support Table

**CST100-105**, **135** (W/O Clamping System)











Code No.	Α	В	С	D	E	Weight(kg)
CST100-105	150	105	155	100	100	7
CST100-135	150	135	185	100	100	8


## Compact & Slim Support Table

**TAS-100N** 











Code No.	Α	В	С	D	Е	Clamping System	Clamping Torque(N·m)	Weight(kg)
TAS-100N	200	135	235	100	80	Pneumatic	217	17


## Slim Support Table

**TAT-403N** 









The table without T slots "N" is standard.

T slots are available (optional)

Code No.	Α	В	С	D	E	Clamping System	Clamping Torque (N·m)	Weight(kg)
TAT-403N	480	240	440	400	150	Hydraulic	1500	155

- ★ Pneumatic ports: 2 x Rc1/8 Solenoid, Clamp-Unclamp switches are not included.
   ★ Hydraulic connections are RC3/8 X 2 and pneumatic connections are RC1/8 X 2. Confirmation switches for clamp/unclamp and solenoid valve are not included.
- ★ Hydraulic pressure is 3.5MPa. Air pressure is 0.5MPa.
- ★ Rotary joint is available for all models. **P.81**
- ★ Please add "— center height" at the end of Code No. for the support table with different center height (B) . e.g. TAT321-240 (For CNC321T)

# SUPPORT TABLE





## Support Table

**TAT-105N** 











Without T-slots "N" (standard) / With T-slots (optional) in case of TAT-105


Code No.	Α	В	С	D	E	Clamping System	Clamping Torque(N·m)	Weight(kg)
TAT-105N	155	105	175	105	113	Pneumatic	205	16

## **TAT-170N**










Without T-slots "N" (standard) / With T-slots (optional) in case of TAT-170


Code No.	Α	В	С	D	E	Clamping System	Clamping Torque(N·m)	Weight(kg)
TAT-170N	155	135	220	170	138	Pneumatic	205	25


## **TAT-200N, 250N**












The table without T slots "N" is standard. T slots are available (optional)


Code No.	Α	В	С	D	Е	Clamping System	Clamping Torque (N·m)	Weight(kg)
TAT-200N	250	150	275	200	145	Pneumatic / Hydraulic	112/784	43
TAT-250N	250	170	295	250	145	Pneumatic / Hydraulic	112/784	50


★TAT-200N is used in combination with CNC321T or CNC401T to install lifting-block.

## TAT-321N, 401N, 501N









The table without T slots "N" is standard. T slots are available (optional)

Code No.	Α	В	С	D	E	Clamping System	Clamping Torque(N·m)	Weight(kg)
TAT-321N	400	230	400	320	250	Hydraulic	1470	120
TAT-401N	400	230	430	400	250	Hydraulic	1470	140
TAT-501N	480	310	560	500	250	Hydraulic	1470	220

# TAILSTOCK (MANUAL, PNEMATIC, HYDRAULIC) NIKKEN

## Tailstock

	ilstock	Manual	PNEUMATIC / HYDRAULIC	HYDRAULIC
	ilstock illust ter Height	Stroke: 15mm	Stroke: 60mm	Stroke: 100mm
CNC105	105	P-105S	PBA-105	
CNC180, 202	135	P-125S	PBA-135	
NCT200	135	P-125S	PBA-135	
CNC180B, 202B	180	P-170S	PBA-180	H-170S
NST250	155	P-150S		H-150S
CNC260, 302, 260P, 302P	170	P-170S	PBA-170	H-170S
CNC321, 401	230	P-230S		H-230S
CNC501, 601	310	P-310S		
NST300	208	P-210S		H-210S
NST500	288	P-280S		
5AX-100	135	P-125S	PBA-135	
5AX-130	150	P-150S	PBA-150	H-150S
5AX-201	180	P-170S	PBA-180	H-170S
5AX-230	240	P-230S		H-230S
5AX-250*	250			
5AX-350	300	P-310S		
CNC100-2, 3, 4W	105		PB-105-2,3,4W	
NSVZ180	135	P-125S	PBA-135	
NSVZ300	170	P-170S	PBA-170	H-170S
NSVX400	240	P-230S		H-230S


<sup>\*</sup>Please contact us about the Tailstock for **5AX-250**.

#### Manual Tailstock





Changeable Center




The center height can be adjusted.
Please refer to Center Height H on the table.

Code No.	Center Height H	Α	В	С	D	E	F	G	Weight (Kg)
P-105S	102~110	27	150	76	74	120	195	14	10
P-125S	130~140	27	150	76	74	120	210	14	11.5
P-150S	145~160	25	195	98	102	145	210	18	22
P-170S	160~180	25	195	98	102	145	210	18	22.5
P-210S	200~220	25	195	98	102	145	250	18	26.5
P-230S	220~240	25	195	98	102	145	250	18	27
P-280S	280~300	15	235	103	124	145	330	20	41
P-310S	300~320	15	235	103	124	145	330	20	41.5

 $\bigstar$ Left hand type is available for all models.  $\bigstar$ For **P-150S** or larger size tailstocks, 5 pcs of changeable centers are included.  $\bigstar$ Live center can be applied.

## ■ Changeable Center


Code No.	FIG	Α	В	С
PC-2	I	25		
PC-3	I	50		
PC-4	II		30	18.45
PC-5	II		40	28.45
PC-6	II		50	38.45



# TAILSTOCK (MANUAL, PNEMATIC, HYDRAULIC) NIKKEN

## Pneumatic / Hydraulic both usable Small Size Tailstock






The center height can be adjusted within 0.35mm.

Code No.	Conton Hoight H		G	Thrus	st (N)	Weight (Kg)	
Code No.	Center Height H	H <sub>1</sub>	G	Pneumatic. 0.5MPa	Hydraulic. 2MPa	weight (Kg)	
PBA-105	105	25	14	1176	4733	15	
PBA-135	135	55	14	1176	4733	20	
PBA-150	150	70	18	1176	4733	22	
PBA-170	170	90	18	1176	4733	24.5	
PBA-175	175	95	18	1176	4733	25	
PBA-180	180	100	18	1176	4733	25.5	

<sup>★</sup>Rotary center is built-in. ★MT (Morse Taper) type quill is also available. Please contact with us.

## Pneumatic / Hydraulic both usable for Multi-Spindle Tailstock






Code No.	Center Height H	H <sub>1</sub>	G	Thrus	st (N)	Weight (Kg)
Code No.	ochter rieight if	•••	ď	Pneumatic. 0.5MPa	Hydraulic. 2MPa	Weight (itg)
PB-105-2W	105	25	18	1176	4733	28
PB-105-3W						42
PB-105-4W						55

- $\bigstar \mathsf{For}$  fitting metal and stepped guide piece, refer to  $\ensuremath{\textit{=}}\xspace P.78$
- ★MT (Morse Taper) type quill is also available. Please contact us.
- ★The stroke 60mm can be changed. Please contact us.

## Hydraulic Tailstock





The center height can be adjusted. Please refer to Center Height H on the table.

Code No.	Center Height H	H <sub>1</sub>	G	Thrust (N)	Weight (Kg)
0000110.	Contai riaigni ri	•••		Hydraulic. 3.5MPa	Weight (itg)
H-150S	145~160	191	18	5370	28
H-170S	160~180	211	18	5370	35
H-210S	200~220	251	18	5370	41
H-230S	220~240	271	18	5370	45

<sup>★</sup>Rotary center is built-in.

MAX. work piece diameter must be smaller than φ130mm, when the stroke of changing the work piece is more than 30mm marked \*.

<sup>★</sup>The different length of the stroke is available. Please contact us

# **SCROLL CHUCK**





Scroll Chuck



Holes for bolts of Front Mounting


Scroll Chucks with chuck plate marked  $^{\ast}$  are NIKKEN Scroll Chuck of Front Mounting (Fig.1)

NIKKEN Scroll Chuck is used for X-4B, X-6E & X-9F.

The chuck plates for the scroll chucks without \* can be used for the scroll chuck based on JIS B6151 SC/TC standard.

#### Scroll Chuck & Chuck Plate

Chuck	Rai	nge		
Size	External	Internal		
4"	2~ 89	36~ 78		
5″	3~104	42~ 92		
6″	3~135	52~119		
7″	3~153	56~134		
9″	4~190	64~169		
10″	10~229	72~208		
12″	10~258	82~238		



This is the actual gripping range not jow stroke.

#### Front End Dimensions with Scroll Chuck & Chuck Plate

Table Model	Chuck Size	Chuck Plate	Α	В	С	D	Е	F	Fig. N
CNC105	R-4	X-4B	112	58	31.25	80	13	60	2
CNC180	R-5	X-5C*	132	60	37.25	100	3.5	60	1
3110100	R-6	X-6B*	167	66	44.25	130	4	60	1
	R-5	X-5C*	132	60	37.25	100	3.5	60	1
CNC202	R-6	X-6B*	167	66	44.25	130	4	60	1
	R-7	X-7A*	192	75	46.25	155	4	60	1
	R-6	X-6G*	167	66	44.25	130	4	80	1
CNC260, 260P	R-7	X-7L*	192	75	46.25	155	4	80	1
	R-9	X-9H	233	82	55.25	190	25	80	2
	R-6	X-6G*	167	66	44.25	130	4	80	1
CNC302, 302P	R-7	X-7L*	192	75	46.25	155	4	80	1
ŕ	R-9	X-9J	233	82	55.25	190	18	80	2
	R-7	X-7N	192	75	46.25	155	16	105	2
	R-9	X-9K	233	82	55.25	190	18	105	2
CNC321	R-10	X-10G	274	86	53.25	230	20	105	2
	R-12	X-12F-1	310	92	59.25	260	25	105	2
	R-7	X-7K	192	75	46.25	155	16	105	2
	R-9	X-9G	233	82	55.25	190	20	130	2
CNC401	R-10	X-10D	274	86	53.25	230	20	105	2
	R-12	X-10D X-12G	310	92	59.25	260	20	105	2
	R-12	X-12G X-9D	233	82	55.25	190	20	130	2
CNC501, 601	R-10	X-10	274	86	53.25	230	20	130	2
CNC501, 001	R-12	X-10 X-12B	310	92	59.25	260	20	130	2
	R-12	X-12B X-5B		60	37.25		16	60	2
NST250, 300			132			100			
	R-6	X-6A	167	66	44.25	130	16	60	2
	R-7	X-7B	192	75	46.25	155	16	60	2
	R-9	X-9A	233	82	55.25	190	18	60	2
NST300	R-10	X-10B-1	274	86	53.25	230	25	60	2
	R-12	X-12A-1	310	92	59.25	260	25	60	2
	R-7	X-7G	192	75	46.25	155	18	75	2
NST500	R-9	X-9B	233	82	55.25	190	18	75	2
1101000	R-10	X-10C	274	86	53.25	230	20	75	2
	R-12	X-12	310	92	59.25	260	20	75	2
5AX-100	R-4	X-4D*1	112	58	31.25	80	3	40	1
5AX-130	R-4	X-4B	112	58	31.25	80	13	60	2
	R-4	X-4B	112	58	31.25	80	13	60	2
EAV 201	R-5	X-5C*	132	60	37.25	100	3.5	60	1
5AX-201	R-6	X-6B*	167	66	44.25	130	4	60	1
	R-7	X-7A*	192	75	46.25	155	4	60	1
EAV 000	R-6	X-6B*	167	66	44.25	130	4	60	1
5AX-230	R-7	X-7A*	192	75	46.25	155	4	60	1
5AX-250	R-9	X-9F	233	82	55.25	190	20	60	2
	R-7	X-7M	192	75	46.25	155	16	80	2
- A.V. A.E.C	R-9	X-9J	233	82	55.25	190	18	80	2
5AX-350	R-10	X-10E-1	274	86	53.25	230	25	80	2
	R-12	X-12D-1	310	92	59.25	260	25	80	2
NSVZ180	R-6	X-6E	167	66	44.25	130	15	60	2
11012100	R-6	X-6A	167	66	44.25	130	16	60	2
	R-7	X-7B	192	75	46.25	155	16	60	2
NSVZ300							18	60	
	R-9	X-9A	233	82	55.25	190			2
	R-10	X-10B-1	274	86	53.25	230	25	60	2
	R-7	X-7D	192	75	46.25	155	16	80	2
NSVX400	R-9	X-9C	233	82	55.25	190	18	80	2
	R-10	X-10A	274	86	53.25	230	20	80	2
	R-12	X-12C	310	92	59.25	260	20	80	2


<sup>★</sup>The maker of the scroll chuck was changed. This table shows the chuck plate of the new maker. Please refer to CAT NO.8168 or older for the chuck plate of the old maker.

<sup>★</sup>The dimension from the table surface to the jaw is; \* B+C Others: E+B+C \*1 : Jig-plate with \$\phi\$120 (AX101R075) is required.


# **POWER CHUCK**



- 1 Power Chuck
- 2 Rotary Cylinder
- 3 Chuck Adapter
- 4 Cylinder Adapter
- **5** Connecting Rod



When power chuck or rotary cylinder is installed on 5AXtable, the 5AX- table must be High Column type.



Power Chuck & Rotary Cylinder

Table Model	Power Chuck Code No.	Pneu. Rotary Cylinder / Hyd. Rotary Cylinder	Α	В	С	D	E	Table Model	Power Chuck Code No.	Pneu. Rotary Cylinder / Hyd. Rotary Cylinder	Α	В	С	D	Е
CNC105	HO1MA-4	H05CH-100 HH4C-80	110	70	27	115	215 220	5AX-100H 5AX-130H	HO1MA-4		110	70	27	_	_
		H05CH-100				130	215	3AX-13011		_					
	HO1MA-4	HH4C-80	110	70	27	130	220	─ I HO1MA-4			110	70	27	-	-
CNC180	HO1MA-5	H05CH-150	135	70	27	115	215	5AX-201H	HO1MA-5		135	70	27	_	_
CIVETOO	TIOTIMA-3	HH4C-80	135	70	21	186	235	5AX-230H	TIOTIIIA O		135	70	21		
	HO1MA-6(S)	H05CH-175	165	94	43	135	240		HO1MA-6(S)		165	94	43	-	-
		HH4C-100	100	54		210	240			_	100	J-1		-	-
	HO1MA-4	H05CH-100	110	70	27	115	215		HO1MA-6(S)		165	94	43	-	-
		HH4C-80				130	220	5AX-250H	(- /					-	-
CNC202	HO1MA-5	H05CH-150	135	70	27	115	215		HO1MA-8(S)	Please ask for the detail.	210	110	43	_	_
		HH4C-80				186	235			- Ioi the detail.					_
	HO1MA-6(S)	H05CH-175 HH4C-100	165	94	43	135	240		HO1MA-6(S)		165	94	43	-	-
		H05CH-100				210	240			-					<u> </u>
	HO1MA-4	HH4C-80	110	70	27	115	215	<b>5AX-350H</b> H01MA-8(S)		HO1MA-8(S)			43	-	-
NCT200	HO1MA-5	H05CH-150 HH4C-80	135	70	27	115 186	215 235		HO1MA-10(S)	HO1MA-10(S)		120	43	-	-
	HO1MA-6(S)	H05CH-175 HH4C-100	165	94	43	135 210	240 240	5AX-2MT-105H	HO1MA-4		110	70	27	118 98	120 115
		H05CH-175				135	240	54V 4MT 405		-			07	118	120
CNC260	HO1MA-6(S)	HH4C-100	165	94	43	210	240	5AX-4MT-105	HO1MA-4		110	70	27	98	115
CNC260P	110484 0(0)	H05CH-250				160	250		HO1MA-4	H05CH-100				115	215
	HO1MA-8(S)	HH4C-125	210	110	43	290	295		HUTWA-4	HH4C-80	110	70	27	130	220
	HO1MA-6(S)	H05CH-175	165	94	43	135	240	NSVZ180	HO1MA-5	H05CH-150	135	70	27	115	215
	110 1MA-0(3)	HH4C-100	105	94	43	210	240	14072100	HOTMA-5	HH4C-80	133	70	27	186	235
CNC302	HO1MA-8(S)	H05CH-250	210	110	43	160	250		HO1MA-6(S)	H05CH-175	165	94	43	135	240
CNC302P	(- /	HH4C-125	210	110	10	290	295		(-)	HH4C-100	100	01	10	210	240
	HO1MA-10(S)	H05CH-300	254	120	43	160	250		HO1MA-6(S)	H05CH-175	165	94	43	135	240
		HH4C-125				340	310			HH4C-100				210	240
	HO1MA-8(S)	H05CH-250 HH4C-125	210	110	43	160	250	NSVZ300	HO1MA-8(S)	H05CH-250	210	110	43	160	250
		H05CH-300				290	295			HH4C-125				290	295
CNC321, 401	HO1MA-10(S)	HH4C-125	254	120	43	160 340	250		HO1MA-10(S)	H05CH-300	254	120	43	160 340	250 310
		H05CH-300				180	310 260			HH4C-125 H05CH-250				160	250
	HO1MA-12(S)	HH4C-140	304	140	53	340	310		HO1MA-8(S)	HH4C-125	210	110	43	290	295
		H05CH-250				160	250			H05CH-300				160	250
	HO1MA-8(S)	HH4C-125	210	110	43	290	295	NSVX400, 500	HO1MA-10(S)	HH4C-125	254	120	43	340	310
0110504 004		H05CH-300				160	250	500		H05CH-300				180	260
CNC501, 601	HO1MA-10(S)	HH4C-125	254	120	43	340	310		HO1MA-12(S)	HH4C-140	304	140	53	340	310
	HO4MA 40(0)	H05CH-300				180	260	-	-	_	-	-	-	-	-
	HO1MA-12(S)	HH4C-140	304	140	53	340	310	-	-	-	-	_	_	-	_
CNC-100-2	HO1MA-4	H05CH-100	110	70	07	115	215	-	-	-	-	-	-	-	-
(3, 4)W	110 IIVIA-4	HH4C-80	110	70	27	130	220	-	-	-	-	-	-	-	-

<sup>★</sup>HOWA power chucks and rotary cylinders (Higher: Pneu, Lower:Hydraulic) are listed. Other maker's one can be mounted, please specify the Code No.

🗥 The additional machining may be necessary for the mounting of the power chuck after shipping. Please inform us when ordering, if the power chuck will be mounted after shipping.

<sup>★</sup>Above power chucks are not applicable to NST Table. Please contact with us for mounting.

<sup>★</sup>NIKKEN air/hydraulic rotary cylinder is also available.
★For the specifications of power chuck and rotary cylinder, please refer to material of **HOWA MACHINERY, LTD**.


# **CLAMPING DEVICE and T-NUT**



## Clamping device list by CNC rotary table model

	,					
Code No.	Guide-piece width of CNC rotary table (mm)	Clamping device shape1 Code No.	Quantity	Clamping device shape2 Code No.	Set	Thickness of the sim plate(mm)
CNC105	14	CLA114	1	CLE13	1	5
CNC180	4.4	01.4044	0			
CNC202	14	CLA214	2	_	_	_
NCT200	14	CLA214	2	-	-	-
CNC180B	40	CL D10	0	01.040	•	
CNC202B	18	CLB18	2	CLC18	2	_
CNC202T	14	CLB14	2	CLC14	2	5
CNC260, 260P	18	CLB18	2	CLC18	2	5
CNC302, 302P	10	CLDIO		CLC16	2	5
CNC260B	18	CLB18	0 01.040		2	5
CNC302B	10	CLDIO	2	CLD18	2	5
CNC321(B)	4.0	CL D10	0	01.010	0	10
CNC401(B)	18	CLB18	2	CLC18	2	10
CNC501	200	CI A110	4			20
CNC601	20	CLA118	4	_	_	20
CNC350	18	CLB18	2 <b>CLC18</b>		2	10
CNC450	18	CLA118	4 –		-	10
CNC100 (Mult spindle)	18	CLA118	4	-	-	5
CNC180 (Mult spindle)	18	CLA218	4			
CNC202 (Mult spindle)	10	CLAZIO	4	_	_	_
NST250	16 W-16B Stepped	CLA218	3	-	_	3
NST300	18	CLA118	3	CLB18(CLC18)	1	3
NST500	20	CLA118	4	-	-	-
5AX-100	14	CLA214	4	-	-	-
5AX-130	14	CLB14	2	CLC14	2	-
5AX-150	14	CLB14	2	CLC14	2	_
5AX-201	14	CLA114	4	-	-	_
5AX-230	18	CLB18	2	CLC18	2	_
5AX-250	18	CLA218	4	-	ı	15
5AX-550	20	CLA118	4	-	ı	20
5AX-2MT-105	18	CLA118	4	-	-	-
NSVZ180	14	CLA114	2	-	_	-
NSVZ300	18	CLB18	2	CLC18	2	5
NSVX400	18	CLA118	4	-	-	10

 $<sup>\</sup>bigstar \bigstar \texttt{CLD18}$  is what makes additional processing on **CLC18**, width: from 55 to 50mm




CLAMPING DEVICE is designed for T-slot pitches of 100mm or 125mm on the machine bed table. Please contact with us for the other pitches.

# **CLAMPING DEVICE and T-NUT**




## ■ Code No. of Clamping Device

Size of clamping	Clamping Device Type										
device bolt	A1	A2	В	С	E						
M12	CLA114	CLA214	CLB14	CLC14	CLE13						
M16	CLA118	CLA218	CLB18	CLC18	CLE18						
M20	CLA120	CLA220	CLB20	CLC20	CLE20						

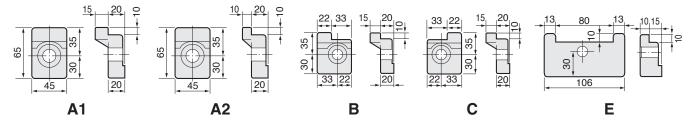


★ Clamping Devices (Fitting Metals) for the following CNC Table Models are Not Included. If necessary, consult NIKKEN sales parson. CNC400H, CNC503H, CNC802, CNC803, CNC1000, CNC1002, CNC1200, CNC1201, CNC1600, 5AX-800, 5AX-1200, 5AX-T400, 5AX-N400 and 5AX-B450T.

#### Standard Guide Piece



Key width dimension	$A \times B \times C$	Code No.
14	14 × 18 × 9	W141809
16	16 × 20 × 10	W162010
18	18 × 25 × 10	W182510
20	20 × 30 × 14	W203014
22	22 × 40 × 14	W224014


## Stepped Guide Piece



AB	10	12	14	16	18	20	22	24	7/16″	11/16″
14	W-14I	W-14H		W-14A	W-14B	W-14C			W-14F	W-14G
18		W-18E	W-18A	W-18B		W-18C	W-18D			
20				W-20A	W-20B		W-20C	W-20D		

- ★ The item is a set of two each.
- •Please note that clamping device is altered when using stepped guide-piece.

# TAP HOLES POSITION at the BOTTOM OF ROTARY TABLE



•Please refer to the above dimensions for direct mounting with the bolts from base plane side.


Table Model	Α	В	С	D	Е	F	M × Depth, 4positions
CNC105, 105L	55	55	55	55	10	125	M10×12L, 4positions
CNC180, 202 CNC180L, 202L	70	70	70	70	12	123	M 8×10L, 4positions
CNC205	85	85	85	85	15	60	M10×15L, 4positions
NCT200	70	70	70	70	12	123	M 8×15L, 4positions
CNC260, 302 CNC260P, 302P	105	120	105	120	12.5	167.5	M12×16L, 4positions
CNC260L, 302L CNC260PL, 302PL	120	105	120	105	12.5	167.5	M12×16L, 4positions
CNC321, 401	145	135	165	135	15	200	M12×20L, 4positions
CNC321L, 401L	135	145	135	165	15	200	M12×20L, 4positions
CNC501, 501L	240	240	240	240	20	235	M16×30L, 4positions

# O/P

# **High precision Indexing (Full Closed Loop)**

## Ultra- High precision Indexing (Full Closed Loop)





- Full closed loop control becomes possible by mounting a rotary encoder at the back of rotary table. And high precise indexing becomes possible by detecting the rotary angle of the table directly.
- ★In case indexing unit of 1" or very high rigidity is required, please select Hirth Coupling Index NSVZ, NSVX series table. ☐ P.33
- ★Cables are not included in ultra precision option. Please order separately.
- ★Air purge of the encoder inside is available as an option for water proof. Please contact us.
- ★Encoders from other encoder manufacturers can also be installed. Please contact us separately.
- The ultra-high precision specification refers to a CNC rotary table that has been finished to ultra-high precision after installing a Magnescale rotary encoder and performing precise calibration. This product is available on additional axis control of FANUC NC.

## **CNC** For CNC Rotary Table


**Ultra-High precision** 


Indexing Accuracy	±2"	±3″	±5"								
Table Model Maker	Magnescale	Heidenhain	Magnescale	Heidenhain							
CNC105, 180, 202, NCT200	_	_	RU97-2048A	RCN2391							
CNC260, 302, 260P, 302P	MSE-RULT97	RCN8591	RU97-2048A	RCN2391							
CNC321, 401, 501, 601, 802, 803	MSE-RULT97	RCN8591	RU97-2048A	RCN8391							
CNC1000~1600	_	RCN8591	RU97-2048A	RCN8391							

## **5AX** For Tilting Rotary Table

#### Ultra-High precision


	Old a Filgit	prodiction				
Indexing Accuracy	Rotary	Tilting	Ro	Rotary		ıg
Maker	±2"	±4"	±	5″	±10	) <i>"</i>
Table Model, axis	Magne	escale	Magnescale	Heidenhain	Magnescale	Heidenhain
5AX-130,201,-250	_	_	RU97-2048A	RCN2391	RU97-2048A	RCN2391
5AX-350	MSE-RULT97	MSE-RULT97	RU97-2048A	RCN2391	RU97-2048A	RCN2391
5AX-550-800	_	_	_	RCN8391	-	RCN8391

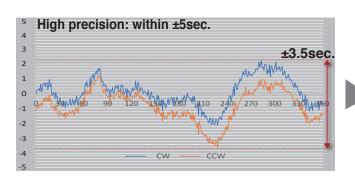

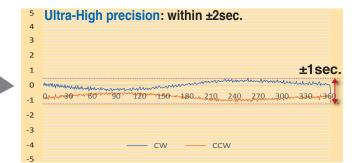

# **Rotary Encoder with Through-hole**





## Rotary Joint Supported High Precise Indexing

- Even the number of IN ports is limited, rotary joint can be installed for the rotary table with the rotary encoder forhigh precision indexing. Please contact us.
- The rotary table with RCN8391 or RCN8591 has φ40mm through hole, and the rotary joint can be mounted.

## CNC High Precise Indexing with Through-hole for CNC Rotary Table

Indexing Accuracy	±3″	±5″
Table Model	Rotary Encoder	Rotary Encoder
CNC260, 302, 260P, 302P	RCN8591	_
CNC321~1600	RCN8591	RCN8391

## 5AX High Precise Indexing with Through-hole for Tilting Rotary Table

Indexir	ng ccuracy	±5″	±10″
Table Model	oouracy	Rotary Encoder	Rotary Encoder
EAV EED 900	Rotary	RCN8391	_
5AX-550, 800	Tilting	-	RCN8391


#### ISO230-2 : Accuracy Measurement Based on International Standard (OPTION)

Accuracy Measuring Method Rotating Axis: 30.2°X 12 points Tilting Axis: 15.2°X 8 points


Continually repeating 5 times rotation of CW/CCW, measuring are to be done at above-mentioned points.


And, bidirectional accuracy of positioning, bidirectional repeatability of positioning, unidirectional accuracy of positioning, unidirectional repeatability of positioning etc. are calculated.

Test data sheet is available in English.









## **ROTARY JOINT**






Rotary Joint is a rotating connector to supply air, hydraulic pressure or coolant liquid from outside to a fixture on a CNC rotary table. If liquid is supplied with ordinary hoses, twisting will happen on them by rotation of the table. However, rotary joints can solve this problem as it rotates in accordance with the table.

- Provides Pneumatic, hydraulic pressure or coolant from the rear of the table to a fixture.
- Automation of clamping/unclamping workpieces becomes possible.
- With a choice of 3 types: Cylinder type, Flange Plate type and Built-in type
- ★The coolant port is recommended to be separated because that the fine cutting swarf may come through the filter into the coolant port.
- ★The cylinder type rotary joint is equipped with a port in the center bore exclusively for the coolant liquid.
- ★Even the number of IN ports is limited, rotary joint can be installed for the rotary table with the rotary encoder. Please contact us.


## The Examples of How Rotary Joint is Used

Rotary joint is used for clamping/unclamping workpieces, confirmation of proper clamp, cleaning, coolant etc.

# Automation Application Examples With Pallet Clamp Unit




# Automation Application Examples With Swing Clamp Unit



## Type of Rotary Joint

#### 1 Cylinder type Rotary Joint


- Cylinder type rotary joint allows many ports.
- Cylinder type rotary joint can be mounted later.



★The cylinder type rotary joint is useful in machining with the coolant liquid, because it's equipped with a port exclusively for the coolant liquid.

#### 2 Flange Plate type Rotary Joint


- Flange plate type rotary joint reduces supply block projections
- •IN ports position can be changed at any side: front, back, left or right side.



- against M/C can be selected.
- ★Flange plate type rotary joint is useful in NSV series.

## 3 Built-in type Rotary Joint

- The highest space efficiency of all models of rotary joints
- Built-in type rotary joint can be mounted without changing dimension.







## **CNC** Rotary Joints for CNC Rotary Tables

Codo No	Cylinder type	Flange Plate	e type	Built-in type
Code No.	MAX. Number of Ports	MAX. Number of Ports	T*(mm)	MAX. Number of Ports
NCT 200	6+1	6	39	_
CNC 105	6+1	4	25	_
180, 202	6+1	6	25	_
205	_	_		6+1
260, 302, 260P, 302P	10+1	11	60	_
(260B, 302B)	_	8+1	_	
321, 401, 400H	12+1	_	8+1	
B350	16+1			_
B450	20+1	_		_
503H	12+1	_		12+1
501, 601	14+1	15*6	-	8+1
802	16+1	_	_	10+1
NSVZ 180	6+1	5 25		_
300	8+1	6 30		_
400, 500	12+1	13	50	_

## **Rotary Joints for Support Tables**


Code No.	Cylinder type	Flange Plate	e type	Built-in type	
Code No.	MAX. Number of Ports	MAX. Number of Ports T*(mm)		MAX. Number of Ports	
TAT- 105, 170	6+1	2	25	_	
200, 250	9+1*1	7	30	_	
321, 401, 501	14+1	8+1	35	_	

<sup>\*1</sup> MAX Number of Ports is 8+1P for TAT-200.

## 5AX Rotary Joints for Tilting CNC Rotary Tables

Code No.	MAX. Number of	Cylinder type	Flange Plate	e type	Built-in type	
Code No.	Ports on Main Unit	MAX. Number of Ports	MAX. Number of Ports	T*(mm)	MAX. Number of Ports	
5AX- 100	_	(4)	3	25	_	
130	_	2 (4)	_	_	_	
201	4	4 (6)	_	_	4*2	
250	3	_	_	_	3*3	
350	6	_	_	_	6+1*4	
550	4	10*5		_	_	
800	6	_	_	_	6	
DD251	_	_	6	30	_	
DD402	_	_	8	30	_	
5AX-DD201A,B	_	_	4	_	_	

- ★ ( ): MAX No. of high column table.
- ★"+1" is the port located in the center hole for coolant.
- \* "T" is dimension of supply block projections after mounting rotary joints.
- \*2 : 4 reserve ports are provided on **5AX-201**.
- \*3 : 3 reserve ports are provided on **5AX-250** and 2 external ports are available.
- \*4 : 6reserve ports are provided on 5AX-350. No additional port is available.
- \*5 : 4 reserve ports are provided on 5AX-550 as standard, and the additional 6 ports are available.
- \*6: It becomes correspondence of a special use.



## Caution of IN port

- •When the air is supplied for all IN ports, please contact us.
- •Please do not supply the different pressure of the air in the IN ports next each other.
- •Please make sure that the line filter should be provided for pneumatic supply use in order to avoid swarf and water ingress for rust problem.
- •This is not avoidable that the oil of the hydraulic port may be leaked to the next air port for the long time use, due to the characteristic of the seal. Please do not assign the air port next to the hydraulic port as much as possible.
- •The rotary joint must be specially treated to prevent from the rust, when using the glycol solution for the operating fluid. Please inform us when ordering.
- •When the rotary joint is designed at your side, please select the low friction type seal. Then, please check the rotary table movement after installation of your rotary joint, not to over load.

# **How to Read Product Code of ROTARY JOINT**



## ■ Code No. of Rotary Joint

Table Model	No. of port	Туре	Code No.	Remarks	
	3+1		RT-CN105SD-3+1-L	3+1RJ Cylinder type	
CNC105R	4+1		RT-CN105SD-4+1-L	4+1RJ Cylinder type	
	6+1		RT-CN105SD-6+1-L	6+1RJ Cylinder type	
	3+1	Cylinder type	RT-CN105SD-3+1-R	3+1RJ Cylinder type	
CNC105L	4+1		RT-CN105SD-4+1-R	4+1RJ Cylinder type	
	6+1		RT-CN105SD-6+1-R	6+1RJ Cylinder type	
	3+1	0 !!	RT-CN180SD-3+1-L		
	3+1	Cylinder type	RT-CN180SD-3+1-R	3+1RJ Cylinder type	
	4	Flange Plate type	RN-CN180SD-4+N-F	4RJ Flange Plate type	
	4+1		RT-CN180SD-4+1-L		
	4+1	Cylinder type	RT-CN180SD-4+1-R	4+1RJ Cylinder type	
CNC180, 202	4+1	Flange Plate type	RN-CN180SD-4+1-F	4+1RJ Flange Plate type	
	5+1	Flange Plate type	RN-CN180SD-5+1-F	5+1RJ Flange Plate type	
	6	Flange Plate type	RN-CN180SD-6+N-F	6RJ Flange Plate type	
	6+1		RT-CN180SD-6+1-L		
	6+1	Cylinder type	RT-CN180SD-6+1-R	6+1RJ Cylinder type	
CNC205	6+1	Flange Plate type	RN-CN205SD-6+1-B	6+1RJ Flange Plate type	
	6	Flange Plate type	RN-NC200SD-6+N-F	6RJ Flange Plate type	
NCT200	6+1	Ordinder true	RT-NC200SD-6+1-L	O L 1D L O dia dan trus	
	6+1	Cylinder type	RT-NC200SD-6+1-R	6+1RJ Cylinder type	
	6	Flange Plate type	RN-NC20ESD-6+N-F	6RJ Flange Plate type	
NCT200E	6+1	Outlindon to ma	RT-NC20ESD-6+1-L	O L 1D L O dia day to a	
	6+1	Cylinder type	RT-NC20ESD-6+1-R	6+1RJ Cylinder type	
	4+1	Cylinder type	RT-CN260SD-4+1-L	4 L 1D L Cylinder type	
	4+1	Cylinder type	RT-CN260SD-4+1-R	4+1RJ Cylinder type	
	4+1	Flange Plate type	RN-CN260SD-4+1-F	4+1RJ Flange Plate type	
	6+1	Cylinder type	RT-CN260SD-6+1-L	0.15.0 5.1.1	
CNC260, 302	6+1	Cylinder type	RT-CN260SD-6+1-R	6+1RJ Cylinder type	
	6+1	Flange Plate type	RN-CN260SD-6+1-F	6+1RJ Flange Plate type	
	8+1	Cylinder type	RT-CN260SD-8+1-L		
	8+1	Cylinder type	RT-CN260SD-8+1-R	8+1RJ Cylinder type	
	8+1	Flange Plate type	RN-CN260SD-8+1-F	8+1RJ Flange Plate type	
	4+1	Cylinder type	RT-CN26PSD-4+1-L	4+1RJ Cylinder type	
	4+1	Cylinder type	RT-CN26PSD-4+1-R	41 The Cylinder type	
	4+1	Flange Plate type	RN-CN26PSD-4+1-F	4+1RJ Flange Plate type	
	6+1	Cylinder type	RT-CN26PSD-6+1-L	6+1RJ Cylinder type	
CNC260P, 302P	6+1	Oyillidel type	RT-CN26PSD-6+1-R	OT The Cylinder type	
	6+1	Flange Plate type	RN-CN26PSD-6+1-F	6+1RJ Flange Plate type	
	8+1	Cylinder type	RT-CN26PSD-8+1-L	8+1RJ Cylinder type	
	8+1	Cymraci type	RT-CN26PSD-8+1-R	OTTHO Cyllinder type	
	8+1	Flange Plate type	RN-CN26PSD-8+1-F	8+1RJ Flange Plate type	
CNC321	8+1	Built-in type	RN-CN321SD-8+1-B	8+1RJ Flange Plate type	
CNC401	8+1	Built-in type	RN-CN401SD-8+1-B	8+1RJ Flange Plate type	
CNC503H	8+1	Built-in type	RN-CN503HSD-8+1-B	8+1RJ Flange Plate type	
311000011	12+1		RN-CN503HSD-12+1-B	12+1RJ Flange Plate type	
CNC501	8+1	Built-in type	RN-CN501SD-8+1-B	8+1RJ Flange Plate type	
CNC601	8+1	Built-in type	RN-CN601SD-8+1-B	8+1RJ Flange Plate type	

# **How to Read Product Code of ROTARY JOINT**



ode No. of Rotary Joint

Table Model	No. of port	Туре	Code No.	Remarks
CST100-135	4+1	Cylinder type	RT-CST100SD-4+1-L	4 L 1 D L Oudindon tuno
C31100-133	4+1	Cylinder type	RT-CST100SD-4+1-R	4+1RJ Cylinder type
	3+1		RT-TA105SD-3+1-L	O L 1D L O dia dan tro-
	3+1		RT-TA105SD-3+1-R	3+1RJ Cylinder type
TAT-105N	4+1       4+1       4+1       3+1       4+1       4+1       4+1       6+1       3+1       3+1       4+1       4+1       4+1       4+1       4+1       6+1       8+1       8+1       4+1       6+1       8+1       8+1       8+1       3       4       3       4       6+1       3       4       6+1       3       4       6+1       3       4       6+1       3	Cylindar typa	RT-TA105SD-4+1-L	4   10   0   4   4   4   4   4
IAI-IUON	4+1	Cylinder type	RT-TA105SD-4+1-R	4+1RJ Cylinder type
	6+1		RT-TA105SD-6+1-L	0.10.10.10.10.10.10
	6+1		RT-TA105SD-6+1-R	6+1RJ Cylinder type
	3+1		RT-TA170SD-3+1-L	0.10.10.10.10.10.10
	3+1		RT-TA170SD-3+1-R	3+1RJ Cylinder type
TAT 170N	4+1	Cylinder type	RT-TA170SD-4+1-L	4.10.10.15.15.1
TAT-170N	4+1	Cylinder type	RT-TA170SD-4+1-R	4+1RJ Cylinder type
	6+1		RT-TA170SD-6+1-L	0.10.0 "
	6+1		RT-TA170SD-6+1-R	6+1RJ Cylinder type
	4+1		RT-TA200SD-4+1-L	4.15.10.15.1
	4+1		RT-TA200SD-4+1-R	4+1RJ Cylinder type
TAT-200N	6+1	O dia dan kura	RT-TA200SD-6+1-L	
	6+1	Cylinder type	RT-TA200SD-6+1-R	6+1RJ Cylinder type
	8+1		RT-TA200SD-8+1-L	0.15.0 !!
	8+1		RT-TA200SD-8+1-R	8+1RJ Cylinder type
	4+1		RT-TA250SD-4+1-L	
	4+1		RT-TA250SD-4+1-R	4+1RJ Cylinder type
TAT OF ON	6+1		RT-TA250SD-6+1-L	
TAT-250N	6+1	Cylinder type	RT-TA250SD-6+1-R	6+1RJ Cylinder type
	8+1		RT-TA250SD-8+1-L	0.10.0."
	8+1		RT-TA250SD-8+1-R	8+1RJ Cylinder type
EAV 100	3	Flange Plate type	RN-AX101SD-3+N-A	3RJ Flange Plate type
5AX-100	4	Cylinder type	RT-AX101SD-4+N-A	4RJ Cylinder type
EAV 120	3	Outlined - 11 to 11-	RT-AX130SD-3+N-A	3RJ Cylinder type
5AX-130	4	Cylinder type	RT-AX130SD-4+N-A	4RJ Cylinder type
EAV 201	4		RN-AX201SD-4+N-A	4RJ Flange Plate type
5AX-201	6+1	Cylinder type	RT-AX201SD-6+1-A	6+1RJ Cylinder type
5AX-250	3	Flange Plate type	RN-AX250SD-3+N-A	3RJ Flange Plate type
5AX-350	6	Flange Plate type	RN-AX350SD-6+N-A	6RJ Flange Plate type

# RT-CN105 SD-3+1-L

Hose Direction of the Sleeve seen from behind, or sub-code.

R: Right (Cylinder type) Fig.1

L: Left (Cylinder type) Fig.2

F: Flange (Flange Plate type) Fig.3

B: Main Unit (Built-in type)

A:5AX

Number of Ports 3+1 With a Center Port 3+N W/O a Center Port

SD: Standard

Diameter of Table

RT : Cylinder type Rotary Joint

RN: Flange Plate type Rotary Joint, Built-in type Rotary Joint.







R : Right (Cylinder type)


L: Left (Cylinder type) Flange (Flange Plate type)






## ■When pulling

This holder adopts a 12 ° short taper that achieves high static rigidity due to its gentle taper angle. Its feature is that it can achieve higher tightness by combining a taper cone with a slit that aligns the center and contracts when pulling in.




## ■ When clamping

The holder is further retracted, the internal disc spring contracts in sync with the taper cone's contraction, causing the flange face to tightly adhere. As a result, the two face of the taper and flange provides high rigidity.



## ■When unclamping

During unclamping, air is sprayed to clean the taper and flange sections.










## The shank of the Multi Jig Fixture Holder is available in RN40 and RN45 types.


RN40	CNC105,5AX-130
RN45	CNC180,202,260P,5AX-201

## ■Multi Jig Fixture Holder with flange mount











Code No.	L	D	D1	Н	h	<b>A</b> <sup>+0.2</sup>	a <sup>±0.005</sup>	В	С	PC	G	G₁	$G_2$	Mounting weight	Weight
RN40-63-25-P	40	25	63	30	15	18	16	22.5	10	48	M10×25L	M 8×15L	M4× 8L	8kg (estimate)	1. 5kg
RN45-85-32-PS	45	32	85	35	20	20	18	29	12	65	M10×25L	M10×15L	M5×10L	10kg (estimate)	2. 5kg

## ■ Multi Jig Fixture Holder with milling chuck









Code No.	L	D	D,	Н	A <sup>+0.2</sup>	a <sup>±0.005</sup>	В	Weight
RN40-C32-90-PS3	90	32	69	77	18	16	22.5	2.5kg
RN45-C32-100-PS	100	32	69	85	20	18	29	3.8kg
RN45-C42-100-PS	100	42	84	90	20	18	29	4. 5kg

## ■ Multi Jig Fixture Holder with Scroll chuck





Code No.		0	0		n n	Chuck size	Grippin	g range*	Majabt
code No.	L	Ł	<b>L</b> ₁	ע	<b>D</b> <sub>1</sub>	Cliuck Size	Outer dia.	Inner dia.	Weight
RN40-SC4-PS332	141.3	101.3	31.2	24	112	<b>4</b> ∮²	2~ 89	36~78	6kg
RN45-SC5-PS3	158.3	113.3	37.2	32	132	5∮ン	3~104	42~92	9.5kg

<sup>\*</sup>This is within a range that can be accurately grasped. This is not the stroke of the jaws.

## ■ Multi Jig Fixture Holder sample





















Multiple workpieces can be machined continuously, enabling unmanned operation for extended periods.

# Simple 1


The holder has very accurate repeatability, which eliminates the need for centering skills or experience.

## Simple 2

If multiple workpieces can be set on the holder, high efficiency continuous machining can be easily achieved through external setup.

## Simple 3

When accommodating different workpieces, simply changing the tip jig fixture of the holder enables easy machining of low volume production of high varieties.

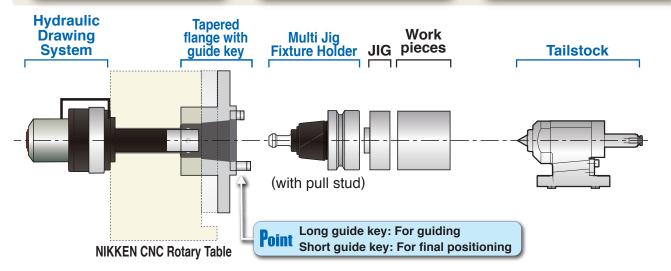


CNC rotary table	Hydraulic Drawing System (Drawing force of 7.9KN at 3.5MPa)	Tapered flange with guide key	Multi Jig Fixture Holder with flange mount	(Option) Tailstock*1
CNC105	HYD-PD-CN105	TF40-GKYE-CN105	RN40-63-25-PS332	PBA-105 (Air/Hyd)*2
CNC180	HYD-PD-CN180	TF45-GKYE-CN180	RN45-85-32-PS3	PBA-135 (Air/Hyd)*2
CNC202	HYD-PD-CN180	TF45-GKYE-CN180	RN45-85-32-PS3	PBA-135 (Air/Hyd)*2
CNC260P	HYD-PD-CN26P	TF45-GKYE-CN26P	RN45-85-32-PS3	PBA-170 (Air/Hyd), H-170S (Hyd)
5AX-130H	HYD-PD-AX130	TF40-GKYE-AX130	RN40-63-25-PS332	-
5AX-201H	HYD-PD-AX201	TF45-GKYE-AX201	RN45-85-32-PS3	-

<sup>\*1:</sup> The stroke of all tailstocks is 100 mm. Max. workpiece dia. for the H-170S is \$\phi\$130mm.

<sup>\*2:</sup>For the PBA series, select either pneumatic or hydraulic for your application. Please contact us for the tailstock control.



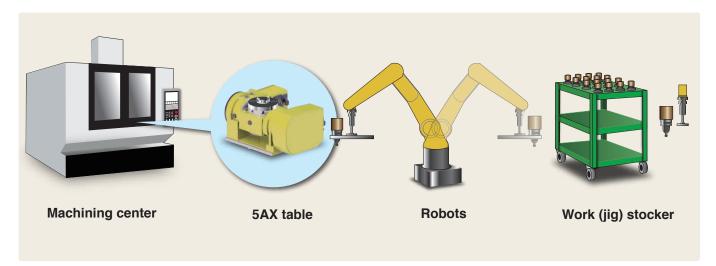


## ■All faces can be machined using the 5AX table.




#### ☞ P.90

All faces can be machined with one operation.

Consolidate processes and improve machining accuracy.



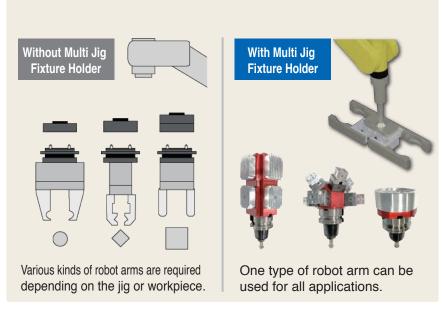

When automation with robots, various arms are required to match the jigs and the workpieces.

In addition, Stocker design and robot teaching require significant costs and time.

With the multi jig fixture holder system, a single type of robot arm can be used to grip the V-flange portion of the holder. This greatly reduces the hurdles to introducing robots in the future.

## ■Tool wagon for stocker



Using a tooling wagon for the stocker makes it easy to make the stocker, and move it to the next process.

#### Positioning of the holder




#### Location of the Tool wagon



Install a stopper block for location the tool wagon.




## Additional axis specifications

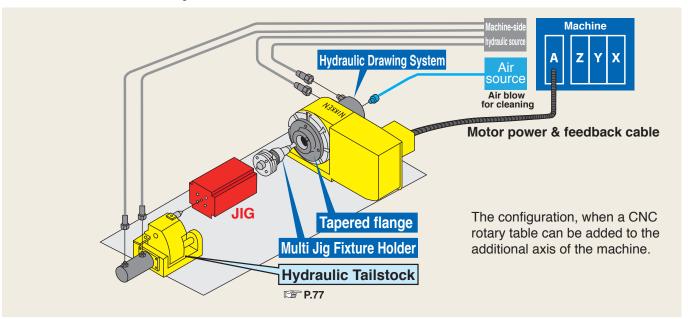

★Please contact us if a hydraulic source cannot be obtained from the machine side.


## M signal specification

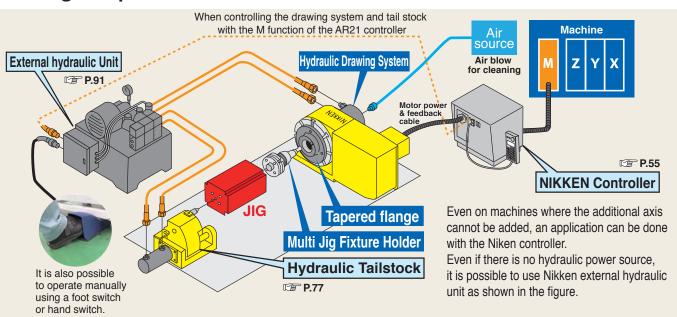

★Please contact us for the tailstock control.




## First, try to change manually on the CNC rotary table.

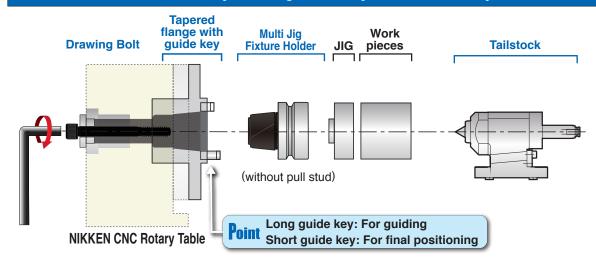

CNC rotary table	Drawing Bolt (with collar)	Tapered flange with guide key	Multi Jig Fixture Holder	Tailstock
CNC105	PBS-CN105	TF40-GKYE-CN105	RN40-63-25	PBA-105
CNC180	PBS-CN180	TF45-GKYE-CN180	RN45-85-32	PBA-135
CNC202	PBS-CN180	TF45-GKYE-CN180	RN45-85-32	PBA-105
CNC260P	PBS-CN26P	TF45-GKYE-CN26P	RN45-85-32	PBA-170

## ■ The Multi Jig Fixture Holder can also be used for 5 faces machining of the workpieces.

## System with 5AX-Table

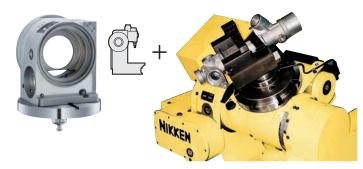


The full surface machining on top half of the component can be achieved with only one setup.

The machining cycle time will be adjusted with increasing the number of machines.

- As the full surface machining can be done with only one setup, the finish quality will be improved.
- Even if one machine breaks down, the extended operation time on another machine can achieve same quantity of production
- It's easy and quick to machine new design component only by changing machining program.
- The random production can be done by the jig holder with ID tip. (That's ideal for the automotive production line as there are many pair parts of right and left.)

## Samples

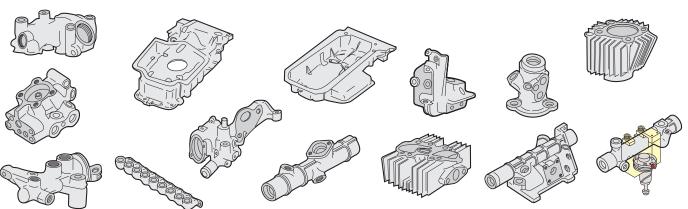

## **NIKKEN**

## Waterproof Specifications

- ·Mechanical parts of the table are perfectly sealed. For water resistance to electric parts such as cables, the hard-wired type connection on the motor cover is available as an option.
- •For the rotary table with pneumatic clamping, air purge is arranged inside the motor cover as standard.
- In case of the table which with AR21 controller, the hard-wired type connection on the rotary table side and harting connector fitting on the controller side, however, the harting connector fitting on the rotary table side is also available as an option.
- •For AR21 PW controller, water resistant connector type cables are supplied as standard.

For all CNC rotary tables,  $\triangle$  mark obtained parts or equivalent and  $\bigcirc$  marked electric parts are used, ensuring high safety.

- △ : Safety approval mark by TUV RHEINLAND.
- C: Safety mark required for marketing in Europe from '95.








Cable with Blade (Option) Standard Length: 5m



Harting Connector type

## Position & Direction of Connecting Cable

The standard of the cable connecting direction is **B** or **D**. **A** or **C** is possible on demand.



## Hydraulic Unit

**Specifications** 

**TCC-150** 

MAX.14 l/min

MAX.3.5MPa

- ●AC 200~220V, 3 phases, Capacity: 1KVA.
- •Solenoid valves and pressure switches depends on your applications.
- ●Dimension: 400×405×479mm

# TCC-150

#### **VBA10A-02G**

# OUT Pressure gauge Rc1/4 IN Port OUT PO

## Air Intensifying Booster (Max. Output: 0.7MPa)

The air pressure can be double by Air Intensifying Booster. This is suitable for tables with the Double Intensifying Clamping System.

## Air Hydraulic Booster

Please order an air hydraulic unit for the machine without hydraulic source.


Applicable for CNC260, CNC302: AY0400 / CNC321~CNC803: NB-AB30-150 / 5AX-201,350: NB-AB30-75

Please ask for the layout of the booster.

#### AY0400


Oil Capacity: 30cc Input pneumatic Pressure: 0.4~0.5MPa Output hydraulic Pressure: 2.0~2.5MPa






#### NB-AB30-150

Oil Capacity: 150cc Input pneumatic Pressure: 0.41~0.47MPa Output hydraulic Pressure: 3.5~4.0MPa



#### NB-AB30-75

Oil Capacity: 75cc Input pneumatic Pressure: 0.41~0.47MPa Output hydraulic Pressure: 3.5~4.0MPa



## **NIKKEN**

## Air Craft-related Parts Apprication.



Synchronous Rotation by CNC401 X 2units



**5AX-150** for 4th and 5th axes tilting rotary table on special grinding center

## Automobile Parts Apprication.



CNC180 + TAT-105N





CNC601, 3m Jig Block & TAT-501N





3 sets of power chucks are used for work clamping.

## Energy-related Parts Apprication.




CNC1800 & Support Branch Indexing/ clamping of the turbine disk



**CNC1201** Indexing of the turbine shaft. Turbine shaft is supported and clamped by the roller support.

## ■ Built-in Pallet Clamp System

Available to CNC rotary table and 5AX- tilting rotary table. Very suitable to NC special purpose machine and Horizontal M/C as built-in B axis table.



Lifting type Pallet Clamp Unit

#### Special Color

Please order with the color sample or Munsell Color No.



Pallet Clamp Unit with Automatic Coupler




NIKKEN CNC rotary tables are used in various kinds of world wide applications. Please contact with us with the dimension of your work piece and construction of the jig fixture etc. We will recommend you the best application.

#### Combination with Pallet Changer










2 units of CNC rotary tables are used on the TAPPING CENTER with swing type pallet changer.

### Combination of CNC Rotary Tables







Machining of turbine wheel to use 2 units of CNC rotary tables, one for the swing axis of the HF motor and the other for the rotary axis of the work piece



5AX-400FA-RJ8-800/150



5AX-500MA-RJ10-900/100



5AX-321FA



CNC180+TAT-105N+CNCZ503




**CNC180+Special Support Table** 

## **NIKKEN**


#### ■ Example of 5AX Rotary Table location on M/C

There are various ways of arrangement.

Y axis stroke of the



▼ Tail Stock is used together.




M/C is not enough





▼ Tilting range is 30-135







5AX-300 Example on the angle base (60°)


#### Application of 5AX-Table








Simultaneous 3 axes control of X, Z & A axis instead of turning.












5AX-Multi Spindle Table + Jig Holder with Through Hole


- 1. The work piece is exchanged by ROBOT, the positioning pin goes forward, then the work piece is clamped at the tilting axis = 90°.
- 2. The positioning pin goes backward, the tilting axis moves to 0°, then the machining starts.


The tilting movement is used only for automatic work piece exchange

#### Other Application



and the cutting edge will be detected automatically.






Separate Clamping Rotary table is

Hobbing of tooth module 6∼7

used to drive by spline and positioning.





CNC1201 Indexing of the turbine shaft. Turbine shaft is supported and clamped by the roller support.

# TEC TECHNICAL DATA Accuracy Standard

#### ■ CNC Rotary Table only for Vertical Use···Back side motor mounted type F.21,22. Top side motor mounted type F.17~P.20

No.	Measuring Item	Measuring Method	CNC180•202 NCT200	CNC205	CNC <sub>302</sub> , 260P	CNC321	CNCB <sup>350</sup> <sub>450</sub>	CNC <sup>501</sup>
2	Runout of table surface		0.01mm	0.01mm	0.015mm	0.015mm	0.015mm	0.02mm
3	Concentricity of center bore		0.01mm	0.01mm	0.01mm	0.01mm	0.01mm	0.01mm
4	Squareness of table surface (Minus deviation at upper part is not permitted.)		0.02mm	0.02mm	0.02mm	0.02mm	0.02mm	0.03mm
5	Parallelism between center line of test bar and key way		At 150mm 0.02mm	0.02mm	0.02mm	0.02mm	0.02mm	0.02mm
6	Parallelism between frame bottom surface and table center line		At 150mm 0.02mm	0.02mm	0.02mm	0.02mm	0.02mm	0.03mm
7	Indexing accuracy		±20"	±20"	20"	15"	15"	15″
8	Repeatability		4"	4"	4"	4"	4"	4"

<sup>★</sup> For ultra precision option: One rank higher accuracies than the above figures are inspected.

#### ■ CNC Rotary Table only for Horizontal Use…Built-in type **P.55**

No	. Measuring Item	Measuring Method	CNC 180 NCT 200	CNC <sup>260</sup> , 260P 302, 302P	CNC 321 400 400H	CNC <sub>501</sub> 601	CNC <sub>1000</sub>	CNC1200	CNC1600
1	Parallelism between table surface and frame bottom surface (Concave)		0.015mm	0.02mm	0.02mm	0.02mm	0.03mm	0.04mm	0.05mm
2	Runout of table surface at horizontal position		0.01mm	0.015mm	0.015mm	0.015mm	0.03mm	0.03mm	0.04mm
3	Concentricity of center bore		0.01mm	0.01mm	0.01mm	0.01mm	0.01mm	0.01mm <sup>*1</sup>	0.01mm* <sup>1</sup>
6	Squareness between frame bottom surface and table center line		At 150mm 0.02mm	0.02mm	0.02mm	0.03mm			
7	Indexing accuracy		±20"	20"	15"	15"	15"	15"	15"
8	Repeatability		4"	4"	4"	4"	4"	4"	4"

<sup>★</sup> For ultra precision option: One rank higher accuracies than the above figures are inspected.

#### ■ DD Motor ··· 🖙 P.49~P.54

No.	Measuring Item	Measuring Method	DD201F-60	DD251F-150	DD402F-300
2	Runout of table surface		0.01mm	0.01mm	0.015mm
3	Concentricity of center bore		0.01mm	0.01mm	0.01mm
4	Squareness of table surface (Minus deviation at upper part is not permitted.)		0.01mm	0.01mm	0.02mm
5	Parallelism between frame bottom surface and table center line		At 150mm 0.02mm	0.02mm	0.02mm
6	Parallelism between frame bottom surface and table center line		At 150mm 0.02mm	0.02mm	0.02mm
7	Indexing accuracy		±10"	±10"	±10"
8	Repeatability		4"	4"	4"

No.	Measuring Item	Measuring Method	5AX-DD100AF	5AX-DD201AF3	5AX-DD201BF3
1	Parallelism between table surface andframe bottom at tilting angle 0° (Concave)		0.01mm	0.01mm	0.01mm
2	Deviation of table surface at tilting angle 0°		0.01mm	0.01mm	0.01mm
3	Deviation of table center hole at tilting angle 0°		0.01mm	0.01mm	0.01mm
4	Displacement of center when moving from 0° to 90° at tilting angle 90°		0.015mm	0.015mm	0.015mm
5	Parallelism between table surface and center line of guide key at tilting angle 90°		0.01mm	0.01mm	0.01mm
6	Indexing accuracy of rotary axis		±5″	±10"	±10"
7	Repeatability of rotary axis		2″	4"	4"
8	Repeatability of tilting axis		±10"	±15″	±15″
9	Indexing accuracy of tilting axis		±3″	6"	6"

<sup>★</sup> Please contact us for the accuracy of the rotary table larger equal to CNC802 for vertical use.

<sup>★</sup> Center socket is provided at the center bore for the table marked \*1. Concentricity of the internal center socket is shown.

# **Accuracy Standard**



#### ■ CNC Rotary Table for both of Vertival and Horizontal Use

No.	Measuring Item	Measuring Method	CNC105	CNC180•202 NCT200	CNC <sup>260</sup> , 260P	CNC321	СNСВ <sup>350</sup>	CNC <sup>501</sup>	CNC <sub>1003</sub>
1	Parallelism between table surface and frame bottom surface (Concave)		0.015mm	0.015mm	0.02mm	0.02mm	0.02mm	0.02mm	0.03mm
2	Runout of table surface		0.01mm	0.01mm	0.015mm	0.015mm	0.015mm	0.02mm	0.03mm
3	Concentricity of center bore		0.01mm	0.01mm	0.01mm	0.01mm	0.01mm	0.01mm	0.01mm
4	Squareness of table surface (Minus deviation at upper part is not permitted.)		0.02mm	0.02mm	0.02mm	0.02mm	0.02mm	0.03mm	0.04mm
5	Parallelism between center line of test bar and key way		At 150mm 0.02mm	0.02mm	0.02mm	0.02mm	0.02mm	0.02mm	0.02mm
6	Parallelism between frame bottom surface and table center line		At 150mm 0.02mm	0.02mm	0.02mm	0.02mm	0.02mm	0.03mm	0.03mm
7	Indexing accuracy		±30"	±20"	20"	15″	15"	15"	15"
8	Repeatability		4"	4"	4"	4"	4"	4"	4"

<sup>★</sup> For ultra precision option: One rank higher accuracies than the above figures are inspected.

#### NST, 5AX- Tilting Rotary Table

No.	Measuring Item	Measuring Method	NST <sup>250</sup>	NST500	5AX <sub>130</sub>	5AX-201	5AX-250	5AX-230 350	5AX-500	5AX-800	5AX-1200
1	Parallelism between table surface and frame bottom at tilting angle 0° (Concave)		0.02mm	0.02mm	0.015mm	0.015mm	0.02mm	0.02mm	0.03mm	0.04mm	0.05mm
2	Deviation of table surface at tilting angle 0°		0.02mm	0.02mm	0.01mm	0.01mm	0.02mm	0.02mm	0.02mm	0.03mm	0.04mm
3	Deviation of table center hole at tilting angle 0°		0.01mm	0.01mm	0.01mm	0.01mm	0.01mm	0.01mm	0.01mm	0.01mm	0.01mm
4	Deviation of center line of rotary axis at tilting angle 90°		0.02mm	0.02mm	0.02mm	0.02mm	0.02mm	0.02mm	0.03mm	0.04mm	0.05mm
5	Parallelism between table surface and center line of guide key at tilting angle 90°		0.02mm	0.02mm	0.015mm	0.015mm	0.02mm	0.02mm			
6	Displacement of center when moving from 0° to 90° at tilting angle 90°		0.02mm	0.02mm	0.01mm	0.015mm	0.015mm	0.015mm			
7	Indexing accuracy of rotary axis		20"	20"	±30"	±15"	20"	20"	20"	20"	20"
8	Repeatability of rotary axis		4"	4"	4"	4"	4"	4"	4"	4"	4"
9	Indexing accuracy of tilting axis	Cumulative	60″	60″	60″	60″	60″	60″	60″	60″	60″
10	Repeatability of tilting axis	<u> </u>			±6"	±6"	±6"	±6"	±6"	±6"	±6"

 $<sup>\</sup>bigstar$  For ultra precision option: One rank higher accuracies than the above figures are inspected.

## Mulit-Spindle CNC Rotary Table ... P.25

No.	Measuring Item	Measuring Method	Accuracy
1	Pitch between Spindles		Within ±0.02mm from nominal pitch
2	Center Hight of Spindle	<b></b>	Within ±0.02mm

#### Mulit-Spindle Tilting Rotary Table ... P.47

		<u> </u>	
No.	Measuring Item	Measuring Method	Accuracy
1	Pitch between Spindles		Within ±0.02mm from nominal pitch
2	Center Hight of Spindle	<b>P</b> 1 <b>P</b> 1 <b>P</b> 1	Within ±0.02mm

<sup>★</sup>How to mount the above tables on your M/C, please contact us.

<sup>★</sup> Please contact us for the accuracy of the rotary table larger equal to CNC802 for both of vertical and horizontal use.

<sup>★</sup> Center socket is provided at the center bore for the table marked \*1. Concentricity of the internal center socket is shown.

# **Description of Specifications**



## Specification

CNC260 CNCZ260 Item / Code No. Diameter of Table 260  $\phi$ mm Diameter of Spindle Hole  $\phi$ mm ф80н7 Centre Height mm 170 12+0.018 Width of T Slot mm Air 0.5MPa Hyd. 3.5MPa Clamping System Air/Hyd. 588/1568 Clamping Torque N·m Table Inertia at motor Shaft  $kg \cdot m^2 \times 10^{-3}$ 0.33 Servo Motor  $\alpha$  iF4·3000 r/min MIN. Increment 0.001 **Rotation Speed** 16.6(33.3) r/min **Total Reduction Ratio** 1/120(1/60) Indexing Accuracy sec Net Weight 115 kg Vertical 175 MAX. Work Load Horizontal on the Table 350 kg 42480 Ν MAX. Thrust Load 1442 **FXL** applicable N·m on the Table 2320 **F**XL N·m Guide Line of MAX 50 Unbalancing Load  $N \cdot m$ Vertical MAX. 3.2(1.6) Work Inertia  $(\frac{GD^2}{4})$  kg·m<sup>2</sup> Driving 192 (153) Torque  $N \cdot m$ 

#### Code No.

CNC:Standard CNCZ:High Speed Z Series

The worm wheels and worm screws on CNC and CNCZ models are different and not interchangeable.

#### **Table Diameter**

Please make sure that the work inertia should be within the specified tolerance when the fixture or the work piece is larger than the rotary table diameter.

#### **Through Hole Diameter**

All model have MAX. through hole.

#### Clamping System

For the changing from the hydraulic brake system to the air brake system, please refer to 6-5) Supplying pneumatic or hydraulic pressure for brake and venting air.

The values are according to pneumatic 0.5 MPa / hydraulic 3.5 MPa

Nikken determine the MAX. table rotation speed with the best motor rotation from the motor acceleration characteristics and the practical load test. Normally, we select the motor rotation speed of 1,500r/min or 2,000r/min. It is possible to increase the rotary table rotation speed to increase the motor rotation speed dependant of each application. Please contact with us for the details. FÄNUC  $\alpha$ i series motor can be rotated faster speed than the recommended speed.

 $\alpha$ iF1,  $\alpha$ iF4: 3,000r/min  $\alpha$ iF12: 2,000r/min

#### MAX. Work Load

The figure becomes double when the rotary table is used with tail stock or support table.

#### MAX. Applicable Thrust Load

This is a applicable figure for the (dynamic) cutting thrust force with cutting tools, e.g. drill, at the rotary table horizontal use.

#### Worm Wheel Strength

This is the strength of the worm wheel without brake. It is applied against dynamic cutting thrust.

The figure shows the strength of the bearings on the rotary table spindle and the applicable (dynamic) cutting thrust with center support.

#### MAX. Unbalancing Load

The guide line of MAX unbalancing load means the unbalancing load, which the rotary table is used with support table in vertical application. The guide line figure will be different according to the servo motor, please refer P.57 for more detail.

#### **Driving Torque**

This figure shows the rotation torque at the MAX. rotation speed after acceleration.

#### SI Unit & Gravity Unit SI is the abbreviation of "Systeme International d'Unites".

Item	SI Unit	Gravity Unit	Conversion
Clamping torque	N∙m	kgf∙m	1kgf⋅m=9.8N⋅m
Table Inertia at Motor Shaft *	$\left(\frac{\text{GD}^2}{4}\right)$ kg·m <sup>2</sup> ×10 <sup>-3</sup>	kg cm sec <sup>2</sup>	1kg cm sec <sup>2</sup> =10.2×( $\frac{GD^2}{4}$ )kg·m <sup>2</sup>
MAX. Motor Rotation Speed	r/min	rnm	1rpm=1r/min
MAX. Table Rotation Speed	17111111	rpm	Πριτι= Π/ΠιΙΙΙ
MAX. Thrust Load	N	kgf	1kgf=9.8N
applicable on the Table	N∙m	kgf∙m	1kgf·m=9.8N·m
MAX. Work Inertia*	$(\frac{GD^2}{4})$ kg·m <sup>2</sup>	kg cm sec <sup>2</sup>	1kg cm sec <sup>2</sup> =10.2×( $\frac{GD^2}{4}$ )kg·m <sup>2</sup>
Driving Torque	N∙m	kgf∙m	1kgf⋅m=9.8N⋅m
Air/Hydraulic Pressure	MPa	kgf/cm <sup>2</sup>	1kgf/cm <sup>2</sup> =0.098MPa

<sup>\*</sup> The unit of inertia is expressed in GD2.

# **Recommended Iubricating Oil and Quantity**



#### ■ Recommended oil

Oil Maker	Code No.
Idemistu Kosan	Super Multi Oil 100
JX Nippon Oil & Energy	SUPER MULPUS DX 100
Cosmo Oil Lubricants	Cosmo New Mighty Super 100

Oil Maker	Code No.
Showa Shell Sekiyu	Shell Morlina S2 BA100
EMG Marketing	Mobil DTE Heavy

Table Model	Main Body (cc)	Gear Box(cc)
CNC(Z)105	110	Grease
CNC(Z)180, 202	500	Grease
CNC205	200	Grease
CNC(Z)260, 302	700	300
CNC(Z)260P, 302P	700	300
CNC(Z)321, 401	2,000	700
CNC(Z)400H	2,000	_
CNCB450	2,000	500
CNC(Z)501, 601, CNC801	7,000	1,500
CNC(Z)503	5,000	_
CNCB630	6,000	1,500
CNC802	14,500	2,500
CNC803	15,000	2,000
CNC1200	18	3,000
CNC1201	26	6,000
CNC1600	60,000	
CNC180B, 202B	500	Grease
CNC260B, 302B	700	1,200
CNC321B, 401B	2,000	1,000
CNC180T, 202T	1,500	
CNC260T, 302T	1,500	
CNC321T, 401T	4,000	
CNCB450T	5,500	
CNC501T, 601T	8,000	
CNC100-2W	540	Grease
CNC100-3W	720	Grease
CNC100-4W	900	Grease
NCT200	400	Grease
NSVZ180	500	Grease
NSVZ300	1,500	Grease
NSVX400		,000
NSVX500		,000
NSVX400T	5,000	
NST250	1,300	Grease
NST300	1,800	Grease
NST500	10,000	Grease
TAT105		60
TAT200,250	Gı	rease
TAT321,401	Grease	

### ■ Required oil quantity for 5AX rotary table

Table Model	Axis	Main Body(cc)	Gear Box(cc)
5AX-100	Rotary	300	Grease
5AX-100	Tilting	300	Grease
5AX-130	Rotary	350	Grease
3AA-130	Tilting	400	Grease
5AX-150	Rotary	450	Grease
3AX-130	Tilting	500	Grease
5AX-201	Rotary	400	Grease
3AX-201	Tilting	300	Grease
5AX-250	Rotary	80	
3AA-230	Tilting	600	Grease
5AX-230	Rotary	700	Grease
3AA-230	Tilting	800	400
5AX-350	Rotary	2,000	
3AA-330	Tilting	800	300
5AX-T(N)400	Rotary	14,000 4,000	
3AX-1 (N)400	Tilting		
5AX-B450(T)	Rotary	7,000(9,000)*1	
3AX-D-30(1)	Tilting	3,000(5,500)**2 1,000( - )*2	
5AX-550	Rotary	2,000	Grease
3AA-330	Tilting	2,000	800
5AX-800	Rotary	8,0	
3AX 000	Tilting	4,000	2,000
5AX-2MT-105	Rotary	700	Grease
3AX-2W1-103	Tilting	400	Grease
5AX-2MT-170	Rotary	2,000	
3AX-2WI-170	Tilting	700	300
5AX-2MT-200	Rotary	2,000	
3AA-2WH-200	Tilting	2,000	1,000
5AX-4MT-120	Rotary	2,000	Grease
3AA-4W1-120	Tilting	700	300

## **Assessment**

# **NIKKEN**

#### Accessment for Reliability & Quality.

#### Over Load Test

The wearing of the worm wheel is very small under very severe testing condition.







#### ■ Brake Torque Test







#### Cutting Stability Test


The micro vibration during machining or the surface finish are measured.





EMC Test

Electromagnetic Compatibility Test



**Immunity** 

■ Water Proof Test





Declaration of Incorporation (EU)

#### Accuracy Measurement



**Indexing Accuracy Measurement** by Laser



5AX-230 on 3 Dimensional **Measuring Machine** 




Accuracy measurement with large 3 Dimensional Measuring Machine

# Load Calculation / Indexing Time Comparison / Duraility **NIKKEN**

## Conditions of CNC Rotary Table when being used to CNC Special Purpose Machine

Not only indexing accuracy, the following conditions must be also filled for continuous operation of 24 hours. Namely, Load calculation, Indexing time, Durability etc.
And the overseas service branches and after service ability are also important.





## 1 Load Calculation

In case using conditions are beyond the specification of CNC rotary table, please inform us the work piece, jig fixtures, required indexing time etc. Then, we will calculate the load of your application, and select the suitable CNC rotary table. Please send us your 3D CAD data. (STEP or Parasolid)

No.	Shape	Quantity	Approx. Weight (Kg)	Approx. GD <sup>2</sup> (GD <sup>2</sup> /4)Kgm <sup>2</sup>
1	CNC400T Eccentricity: 450mm	1	260	59
2	Tailstock Eccentricity: 120mm	1	80	14
3	Base	1	11	10
4	Upper Support Parts	1	30	2
5	Pallet Clamp Fixture Eccentricity: 120mm	1	80	6
Total			560	91


## 2 Indexing Time Comparison

Indexing Time = Acceleration Time + Rapid Positioning Time + Deceleration Time.


MAX. moving angle is 180°. Therefore, not only rapid positioning time, but also acceleration/deceleration characteristics is very important. The graph at right hand side shows that CNCZ202 (high speed), with it's excellent acceleration/deceleration capability, gives a very substantial time saving of approximately 300 msec. on this 90° movement comparing with CNC202 (standard).

**CNCZ202**: 500 msec. **CNC 202**: 800 msec.

Item	Rapid Positioning Speed	Acceleration/Deceleration Time Constant
—	44.4 min <sup>-1</sup>	150msec
	22.2min <sup>-1</sup>	100msec



Item	Using Years	Indexing accuracy
_	At installation	Cumulated 10sec
	After 7 years	Cumulated 17sec



## **3** Durability

In 24 hours continuous operation, durability is one of the most important conditions.

Thanks to Carbide Worm System, NIKKEN CNC rotary table ensures highest anti wearing nature even at the severest load conditions with high speed indexing. The graph at right hand side shows the worm wheel & worm screw and accuracy inspection of the table having been used for 7 years on CNC special purpose machine in production line of automobile parts plant.



Worm System after 7 years used.

## **Technical Information**





#### Caution

#### Regarding the rotation speed of the table

- For some models, the table rotation speed is based on 3000 r/min. of the servo motor. However, depending on the application such as huge unbalancing weight, motor manufacturer,or motor model, it may not be possible to rotate the servo motor at 3000 r/min.
- ●The continuous rotation of turning and grinding cannot be done except rotary tilting table with high speed DD motor.☞P.53
- Always be careful not to inflict personal injury on any shop objects when unpacking this equipment.
- Caution should always be used when lifting this product. Especially when using lifting equipment. Manual lifting of this product may cause serious back injury. Always use safe lifting techniques.
- Install the rotary table on a well ventilated place hidden from direct sunlight, on a place not exposed to corrosive gas such as sulfuric acid and hydrochloric acid. Do not install the rotary table on a place with excessive high/low temperature. (Normal operating temperature: 5°C~40°C)
- Under the lower temperature condition, please warm the rotary table up just after power on. Or, please use lighter lubrication oil as another solution.
  Only the specified power voltage should be used. Incorrect power
- supply may result in fire.
- Always power off the machine before attempting any installation and wiring work. Failure to do this may result in serious personal injury or electric shock.
- The machine on which CNC rotary table is installed should have a complete cover or splash guard.
- When installing this product onto a machine tool, always pay special attention to the location of cables, hoses and hydraulic tanks (if used), to check for interference.
- Please make sure that all cables and hoses are sufficiently long to allow full axis travel.
- Always ensure that there is no interference with the CNC rotary
- table or tailstock unit of the ATC (Automatic Tool Change) position.

   Always ensure safe cable runs according to the instruction manual in order not to interfere with the machine operation. It is dangerous if the cables become entangled with the machine table or spindle unit.
- Always check the parallelism and squareness of the table to the machine axes and fix to the machine table using the fixings provided.


- Please follow the instruction manual for installation, wiring of cables and hoses. Failure to connect wiring correctly may cause fire or a serious accident.
- This table has been given a waterproof treatment, however if ingress of coolant should occur, stop using the table immediately. Failure to do so may result in the unit catching fire or causing serious electric malfunction.
- Always ensure that pneumatic or hydraulic hoses are connected correctly. Always keep the air filter clean to prevent water and dirt ingress from the air supply
- Please ensure that the hydraulic pressure flows constantly on the pump line at brake clamp in the save energy type hydraulic circuit.
- Please use CNC rotary table within the specification. Exceeding the specification may cause defective components and irreparable damage. Please contact us in case of the beyond the specification before ordering. FP.100
- Never modify the table by yourself without previous agreement of NIKKEN
- Never to touch any moving parts. Failure to follow this instruction
- may result in serious personal injury.

  For the rotary table with the NIKKEN controller, firstly turn the power of NIKKEN controller off, then turn the power of main M/C off at the end of operation.
- Always remove swarf from the table after use. Long term operation without cleaning may cause damage to the internal mechanism. Always change the lubrication oil annually to prevent the gear wear.
- If a collision occurs with the table, power off the machine controller immediately and contact your distributor for repair.
  Always stop using the table if unusual noises are heard or the slackness
- or defection of work piece and jig fixture are found. Irrepanable damage may be happened. Please contact with your distributor for repair.

## Specification of the rotary table to be used on the special purpose machines.

- 1 Custom made on the Table Face Plate
- · Drilled hole, tapped hole, or dwell pin hole etc.
- · Without T-slot or with T-slot
- · Additional process at center hole
- 2. The location of the Oil Sight Grass, Oil Supply Port and Drain Port can be changed.
- 3. How to be mounted on the Machine
- U-aroove
- · Additional tapped holes on the backside
- · Shift the guide key position
- 4. Modification of the Motor Cover
- 5. Rotary Joint @ P.81
- 6. Built-In Pallet Clamping System P.92
- 7. Special Color @ P.92
- ·Please order with the color sample or Munsell Color No.

When rotary table is used for horizontal use, there is no portion of the table body to be clamped for vertical use.




CNC302T without T slot



CNC202L thout T slot


#### CNC401 without T slot for horizontal use



- The support table is basically used in case of vertical application.
- The machining operation is generally light cut on aluminium materials, however, if the fixture or the component is large size, please make sure that the fixture inertia is within the MAX. work inertia.
- If the unbalance load is too big, it will affect on not only the indexing accuracy but also the durability. Please make sure the unbalance load will be within the following figures. F.57
- In case of the unbalance load is large,
- -The high speed Z series rotary table is not suitable, please use standard rotary table.
- -Please installing the balance cylinder or counter balance.
- -Please advise us the details of the component, fig fixture, indexing time etc. prior to your order, and we will make a calculation of the load and select the best suitable rotary table for your application.
- If the huge amount of coolant has to be applied, we could prepare air purge (with pneumatic pressure of 0.03MPa) on the CNC rotary table body as an option. Please contact us the details.





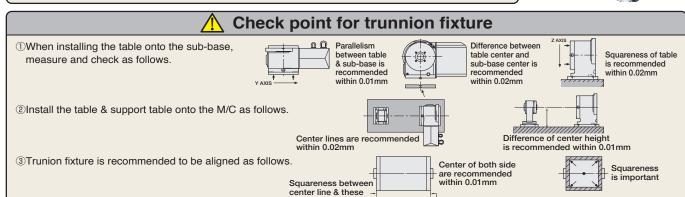

# SERV

# Headquarter






Turning Machining Grinding Assembling Inspection

#### **Technical Center**

Technical Development Office Production Engineering Room Seminar Room

#### **Factory No.2**

Grinding Assembling Inspection Warehouse

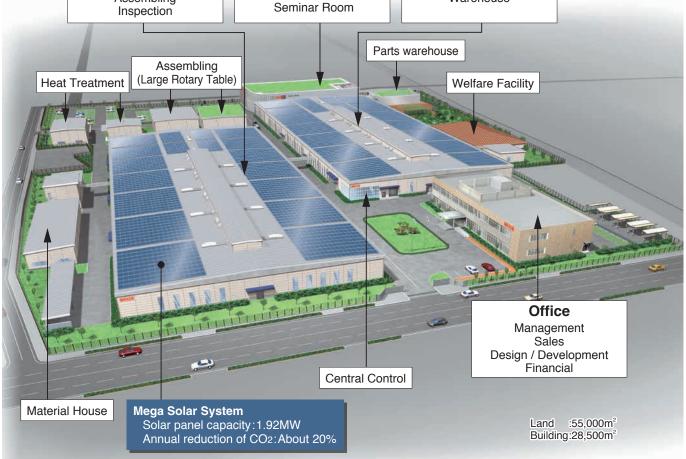

#### **Carbonizing & Sub-Zero Treatment**

NIKKEN is the only tooling product manufacturer which performs sub-zero treatment for tooling. This refers to a technique where -90 deg. ultra-low-temperature processing is performed after carbonizing and quenching in order to eliminate the residual austenite and to form 100% martensite compositions to prevent deterioration over time. This technique has been applied for block gauges and for bearings of the highest grade in the past. It is an example of how NIKKEN pays attention to those aspects which are often hidden from view and how we put our hearts and souls into each and every tooling product.




#### Ion Nitriding

Ion nitriding refers to a nitriding process where glow discharges are generated in a vacuum of a nitrogen-mixed gas atmosphere to heat the workpieces at a low temperature of 450 deg. while at the same time nitriding them by a sputtering action. This processing improves both the wear resistance and sliding performance. (It reduces the surface friction coefficient.) The experience and know-how of ion nitriding have been utilized in a large number of NIKKEN's products, including worm wheels for CNC Rotary Tables and Tough-Cut Skill Reamers.

## **NIKKEN SERVICE NET WORK**



There are overseas Sales Branches in 14 countries. Each sales branch has stocks for toolings and CNC Rotary Tables, and service engineers look after the maintenance and service operation of our products. In the other region, e.g. East-South Asia, Ozaena, South America, Africa, etc., there are some distributors. At the production line in abroad, as there are many requirements for special tools and CNC Rotary Table to suit the special specifications, please ask us or distributors for spare tools and maintenance parts in advance.

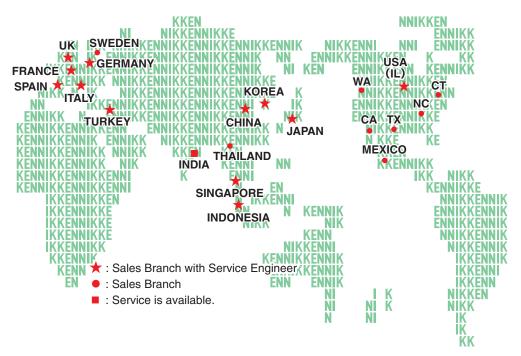



LYNDEX-NIKKEN (U.S.A.)



NIKKEN EUROPE & NIKKEN U.K (UK)



**NIKKEN DEUTSCHLAND (GERMANY)** 



HERRAMIENTAS LYNDEX-NIKKEN (MEXICO)



PROCOMO-NIKKEN (FRANCE)



KOREA NIKKEN (KOREA)



**NIKKEN SCANDINAVIA (SWEDEN)** 



**VEGA INTERNATIONAL (ITALY)** 



OLASA(SPAIN)



**CUTTING TOOLS (SPAIN)** 



**NIKKEN CHINA (CHINA)** 



NIKKEN TURKEY (TURKEY)



SIAM NIKKEN (THAILAND)



**NIKKEN ASIA (SINGAPORE)** 



**NIKKEN INDONESIA (INDONESIA)** 

## Discontinuation of CNC rotary table repair work

We have been repairing our CNC rotary tables that are no longer manufactured. However, more than 20 years have passed since the discontinuation of the following models, and it has become difficult to obtain maintenance parts. Therefore, we will basically discontinue repair work as of April 2024 These CNC rotary tables are also out of date in terms of repid positioning speed and other mechanical specifications. As a replacement, please select a CNC rotary table with the latest functions from this catalogue.

# NIKKEN CHINA

**NIKKEN** 


NIKKEN

New Nikken China facility was moved to Qinzhou Road, Shanghai on 2014. JAN due to the business expansion in China. The standard items of NC tooling & CNC rotary table and each important spare parts are stocked for quick delivery.

You can access to Nikken China with Chinese, Japanese or English. Not only Chinese catalogue but also Chinese instruction manual are provided for Chinese domestic market. Our office has the show room to see and touch our products, and our presentation will be done more practically. Technical seminar of Nikken is also opened at user factory side.







The sales of nikken products through Internet is not started in China. For after service and the further maintenance, please purchase Nikken products through authorized distributors.

rotary table delivered to China.



# SER

# LYNDEX-NIKKEN (NIKKEN USA)



As North America's leading supplier of machine tool accessories, LYNDEX-NIKKEN is a wholly-owned subsidiary of NIKKEN Kosakusho Works., Ltd. - Japan. Backed by over a half century of experience, LYNDEX-NIKKEN sets the standard for high quality and high technology with a complete line of superior toolholders and machine tool accessories. From one source you can expect the best of both worlds: Extreme Quality and Advanced Technology.

LYNDEX-NIKKEN has a team of dedicated application and engineering staff available to advise you on your machining applications and to support our entire product line throughout the U.S., Canada, Mexico and South America. Our regional managers in Chicago, Los Angeles, Boston, Charlotte, Dallas and Seattle support our 1,000 plus distributors with machine tool accessories expertise.

LYNDEX-NIKKEN provides expert process and product consultation for even the most demanding applications with full on-demand field support and ongoing training.



The LYNDEX-NIKKEN North America headquarters is centrally located near Chicago, Illinois. Our 50,000 sq ft. facility houses an inventory of over 12,000 machine tool accessories stocked for fast delivery. Over 95% of orders are shipped out same day. Our extensive inventory of products includes:








#### **Products**

- Rotary Tables NIKKEN's complete line of CNC Rotary Tables are known worldwide for their wear-resistance, rigidity and high-speed rotation. NIKKEN rotary tables are built to provide high accuracy, increased production and a trouble-free long life.
- Advanced Toolholders Maximize the potential of your machine tools with LYNDEX-NIKKEN's advanced toolholders.
- **Standard Toolholders** LYNDEX-NIKKEN's complete range of quality-driven toolholding solutions are designed to meet your strictest requirements.



- Dedicated application and engineering support staff
- Support for entire product line covering the U.S., Canada, Mexico and South America
- On-demand field support and ongoing training
- Customer service and technical support staff
- Expert process and product consultation for even the most demanding applications
- Cutting trials and testing
- Service, repair and custom configuration completed on-site
- Attention to high-tech application demands, including high-speed and balanced toolholding solutions





# **NIKKEN EUROPE (NIKKEN UK)**

**NIKKEN** 

The NIKKEN Euro Centre based in the UK was opened in 1999; from here we sell, distribute and support all products to our subsidiaries and dealers in over 20 countries around Europe.

In addition to carrying out the functions of NIKKEN UK in the United Kingdom (UK), we employ forty staff members and engineers. At the end of 2015, NICE (NIKKEN Innovation Centre Europe) opened in the AMRC manufacturing technology park, where it provides support to customers working with difficult-to-machine materials, particularly in the aviation and energy industries.





#### **Product Inventory**

NIKKEN Euro Centre facilities has a warehouse space of 13,000m<sup>2</sup>. which holds over 50,000 individual items covering a range of some 4,000 product lines, including the latest generation of Single & Multi Axis CNC Rotary tables, thus making it the largest stock of NIKKEN products in Europe.

#### Our Technical Support and Training Section provides our existing customers and potential customers access to:

- A Multimedia based training facility that ensures our customers, through comprehensive training, will realize the full productivity potential of their application.
- A wealth of engineering expertise covering all aspects of application set-up, optimization and implementation that is available for the full life of the NIKKEN product.





# Our machining centre equipped with Testing Facilities enables us to:

- Research, develop and optimize all of our tooling systems.
- Demonstrate to our potential customers the advantages of using both NIKKEN Tooling and CNC Rotary Tables in their applications.

## Our Service Department specializes in:

- Providing on-site inspections prior to rotary table repairs and refurbishment by our own NIKKEN trained service engineers.
- Providing tooling and rotary tables optimized to seamlessly integrate into any application.



# **NIKKEN DEUTSCHLAND (NIKKEN GERMANY)**



Nikken Deutschland GmbH, a wholly owned subsidiary in Germany of NIKKEN Kosakusho Works, was established in 2003 to take over the sales activities of the previous distributor. In the beginning based in Russelsheim, which is a town made famous by the manufacturing complex of Opel, the company was located about 15 minutes away by car from Frankfurt airport. Germany has ranked at the top of the machine tool industry for many years, and is also the supply source of machine tools that are fuelling the significant expansion now taking place in Eastern Europe. Nikken Deutschland GmbH had its base at the centre of the huge market of Germany and Eastern Europe, and continues to broaden the range of the company's sales operations from ULM office now.

NIKKEN has achieved some impressive successes in Germany with its CNC rotary tables and tool holders thanks to a long sales history of the company's sales activities. A sales force consisting mainly of German personnel stands on the front line of this activity to address the sales and servicing needs of the entire country. More specifically, the company provides technical advice, repairs, aftersales support and other services to end users, distributors and machine dealers.



To enable speedy delivery of standard items in the German market and of popular products compliant with European standards, Nikken Deutschland GmbH works closely Nikken Euro Centre to keep a full stock at its disposal. The company uses the most appropriate type of delivery in each case, including parcel post, DHL, door-to-door service and flash shipment, to meet the demands of customers.

The sales territory of Nikken Deutschland GmbH spans the vast area of eastern Europe and covers such countries as the Czech Republic, Slovakia, Austria, Poland, Hungary, Romania and Bulgaria, all countries in which Japanese companies are rapidly expanding their business. The service is not limited to sales, but engineers make on-site adjustments, repairs and service calls as well.



Nikken Deutschland GmbH has participated in and contributed to many trade shows and exhibitions held in Germany, including the EMO show, METAF, AMB and EURO MOULD. The company's fully furnished showroom is a Mecca of information to the constant stream of visitors who can inspect products and examples of machining, as well as receive application advice and technical training. They can handle NIKKEN's products for themselves, learn about the construction and capability of the CNC rotary tables, and learn about the accuracy and other features of NIKKEN's products.

A complete support organisation is in place to ensure that advice is relayed promptly by telephone and other rapid communication media, that repairs or delivery of tool holders and CNC rotary tables are carried out promptly with all due diligence, and that emergency service calls are responded to rapidly.

To make it possible to support all types of motors and controllers for NIKKEN's CNC rotary tables, the company has set up trial run equipment that accommodates many different motors, and offers a full range of accessories including tailstocks, support tables, scroll chucks and collet chucks adapted to the CNC rotary tables. The fact that NIKKEN's CNC rotary tables are endowed with outstanding durability and that a complete support service is provided instil confidence in users that the equipment will give outstanding service in the years ahead.

# SERV

# PROCOMO-NIKKEN (NIKKEN FRANCE)



Procomo France S.A.S was established 30 years ago with the avowed intent to deliver the high-accuracy and high-quality tool holders and CNC rotary tables as well as related services, applications and after-sales servicing, into the hands of engineers in France. A major milestone in the company's history was marked in 2006 with the change of the company name to PROCOMO-NIKKEN, and the company took on a new lease of life as NIKKEN's wholly owned subsidiary in France.





In 2005, PROCOMO-NIKKEN embarked on a complete renovation of its buildings and facilities in order to make it possible for users to gain hands-on experience of NIKKEN's products in a bright and comfortable environment.



In the meeting room, which is fitted out with all the latest multimedia technology, technical seminars are regularly held so that attendees will come away with a clear understanding of NIKKEN's products and technology. The showroom is where videos of cutting operations are screened, and visitors can actually handle some of NIKKEN's products in this room as well. The machining center, which is used for cutting trials, enables visitors to

identify what makes NIKKEN's products different from those of other companies and to judge how impressive are the machining accuracy and advanced cutting capabilities of NIKKEN's products. As the top tool holder manufacturer, NIKKEN believes is that once customers have their own personal experience of the low machining noise, attractive-looking cut surfaces and uniform discharge of chips, they will be convinced that they can completely trust in and depend on the expertise and capabilities of the company.









The stocks of a large number of standard products are always on hand, enabling the products that customers need to be delivered in the shortest possible time. The NIKKEN Euro Centre and PROCOMO-NIKKEN retain constant and close contact; together they take on the challenge of how to machine products in a more rationalized manner, in a shorter time and to a higher accuracy so that France's engineers can meet every need of the French marketplace.

NIKKEN has already earned an enviable reputation in the global marketplace for the high accuracy and outstanding wear resistance of the company's CNC rotary tables. PROCOMO-NIKKEN has a team of five engineers dedicated full-time to providing users with application support prior to placing orders for tool holders and CNC rotary tables and to carrying out the preparation for shipment, education and training programs, maintenance and repairs, and servicing. This support network delivers a wide range of services, while willingly taking up the challenge of coming to grips with new applications.

## Independent optimization system for Industry - 4.0


# WormgearStatus / BacklashStatus



From March 2020, the WormgearStatus data are collected at shipment for all CNC rotary tables with FANUC motor. As a result, the WormgearStatus service and BacklashStatus service are available as optional paid services. Please refer the contents of these services below.

If you would like these service, please contact us. The actual expenses for transportation and accommodation are required separately.

The key items are the CNC rotary table type and serial number. It is necessary to write the control program for WormgearStatus / BacklashStatus to the user's FANUC NC controllers.

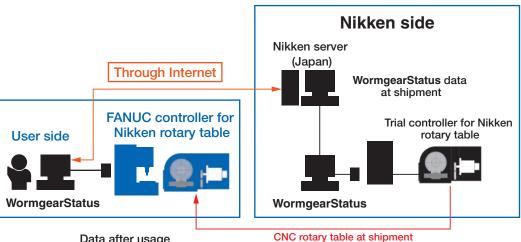



Data after usage






Table type and serial number Data at shipment




#### Comparison



## ■WormgearStatus service JAPAN, USA, EU, China: PAT.P.

WormgearStatus data is the torque data, when the full stroke of a CNC rotary table (example: rotary axis: 0 ° to 360 °, tilting axis: 0 ° to 105°) is rotated at 360 deg/min. **WormgearStatus** data at shipment is collected and stored according to the CNC rotary table type and serial number in the Nikken server in Japan. WormgearStatus data after usage will be collected locally and compared with the data at shipment, then estimate the gear wear position.

#### Estimation of the gear wear




#### ■BacklashStatus service JAPAN: PAT, USA, EU, China: PAT.P.

BacklashStatus will be checked the backlash amount without manual intervention to the position, where gear wear is estimated;

- 1) The angles, that is estimated as the gear wear position by WormgearStatus, will be checked.
- 2) For the CNC rotary tables on NC single purpose machine, the angles to be positioned are fixed and always same positions. In this case, enter these angles to be checked, and activate BacklashStatus.
- 3) If required, backlash compensation function and pitch error compensation function can be utilized without manual intervention for better positioning accuracy.

WormgearStatus / BacklashStatus uses FANUC Servo Guide. WormgearStatus / BacklashStatus is a registered trademark in Japan.



# SERV

# Check Sheet for the Technical Specifications of CNC ROTARY TABLE **NIKKEN**

Last user name ( ) Destination country ( )
CE mark □ Necessary □ Not Necessary
1. Machine tool builder (
2. Machine model (
3. T-slot width ( )/ pitch ( ) / number of slots ( )
4. How to install the rotary table  Uertical and Horizontal  Uertical only  Horizontal only
5. Control method
Rotary axis ( W) Tilting axis ( W)(5AX only)
6. Numerical Control (Manufacturer: ) (Model: )
7. Servomotor  Servomotor included  Servomotor supplied (expected date to be supplied: MM/DD)  Servomotor not included
8. Servomotor model : (
9. Clamping System  Pneumatic( MPa)  Phydraulic( MPa)  Booster
10. Voltage of the solenoid $\square$ AC100V $\square$ DC24V $\square$ Unidentified (confirmed with the drawing for approval)
11. Clamping circuit of the solenoid OFF:Clamp ON:Clamp Unidentified (confirmed with the drawing for approval)
12. Direction of the cable comes out Side Back Top Other (
13. Cable connection method
14. External wiring cable □Necessary □Not necessary
15. Specified color   NIKKEN yellow   Others (Munsell Symbol number: )
16. T-slots of table plate □Necessary □Not necessary
17. Language of instruction Manual □Japanese □English
18. Accessories □Tailstock □Scroll chuck □Power chuck
19. Option ☐ High precise indexing ☐ Rotary joint
Notices [