


TAP COLLET without TORQUE CONTROL (JIS)



- Tap Collet for ZH Tapping Holder
- Tap Collet for CNC Lathe

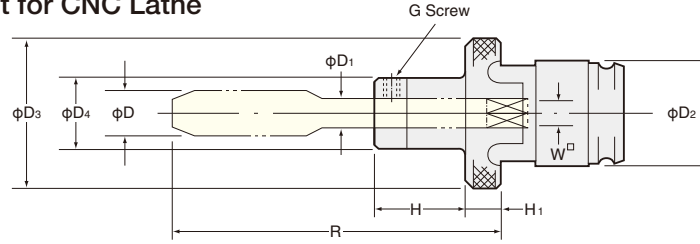

ZMK

For Synchronized Tapping on M/C, use ZMK tap collet with ZH Tapping Holder, Please refer P.66.

⚠ Torque Control is not built-in. Careful attention must be paid to diameter of drilled hole, program and so on.

Dimension List of ZMK Tap Collet

D	ZMK8		ZMK12		ZMK16			ZMK24		
	M3~6	M8	M3~6	M8~12	M4~6	M8~12	M14~16	M12	M14~16	M18~24
D ₂	13		19		25			30		
D ₃	20		28		36			42		
D ₄	13	19	13	19	13	19	26	19	26	32
H	14	24	16	20	21			25		29
H ₁	4		6		6			8		
G	M4-0.5	M6-0.75	M4-0.5	M6-0.75	M4-0.5	M6-0.75		M6-0.75	M8-1.0	

	ZMK 8				ZMK12				ZMK16				ZMK24			
	Code No.	D ₁	W	ℓ	Code No.	D ₁	W	ℓ	Code No.	D ₁	W	ℓ	Code No.	D ₁	W	ℓ
Metric (M)	ZMK8-3	4	3.2	43.5	ZMK12-3	4	3.2	47.5	ZMK16-4	5	4.0	53.5	ZMK24-12	8.5	6.5	83
	-4	5	4.0	44.5	-4	5	4.0	48.5	-5	5.5	4.5	61.5	-14	10.5	8.0	84
	-5	5.5	4.5	52.5	-5	5.5	4.5	56.5	-6	6	4.5	63.5	-16	12.5	10.0	89
	-6	6	4.5	54.5	-6	6	4.5	58.5	-8	6.2	5.0	66	-18	14	11.0	93
	-8	6.2	5.0	67	-8	6.2	5.0	65	-10	7	5.5	71	-20	15	12.0	97
					-10	7	5.5	70	-12	8.5	6.5	77	-22	17	13.0	106
					-12	8.5	6.5	76	-14	10.5	8.0	78	-24	19	15.0	109
								-16	12.5	10.0	83					
Unified (U) or British Standard Whitworth (W)	ZMK8-1/8	4	3.2	43.5	ZMK12-1/8	4	3.2	47.5	ZMK16-1/8	4	3.2	52.5	ZMK24-1/2	9	7.0	85
	-3/16	5	4.5	52.5	-3/16	5.5	4.5	56.5	-3/16	5	4.5	61.5	-9/16	10.5	8.0	86
	-1/4	6	4.5	54.5	-1/4	6	4.5	58.5	-1/4	6	4.5	63.5	-5/8	12	9.0	90
					-5/16	6.1	5.0	65	-5/16	6.1	5.0	66	-3/4	14	11.0	98
					-3/8	7	5.5	70	-3/8	7	5.5	71	-7/8	17	13.0	106
					-7/16	8	6.0	74	-7/16	8	6.0	75	-1	20	15.0	114
					-1/2	9	7.0	78	-1/2	9	7.0	79				
								-9/16	10.5	8.0	80					
Pipe (PT) (PF)					ZMK12-1/8P	8	6.0	51	ZMK16-1/8P	8	6.0	54	ZMK24-3/8P	14	11.0	63
									-1/4P	11	9.0	56	ZMK24-1/2P	18	14.0	76
									-3/8P	14	11.0	57	ZMK24-5/8P	19	15.0	80

★For long size Tap Collets are also available. 50mm (-50L), 100mm (-100L) longer than standard type. e.g. ZMK12-4-50L