




CNC260, 260P, 302, 302P, 321, 401

NIKKEN

CNC

External dimensions depend on the type of the servo motor. Indicated dimensions are in case of FANUC. Please contact us for CAD files (2D:DXF, 3D:PARASOLID).


CNC260, CNCZ260, CNC302, CNCZ302

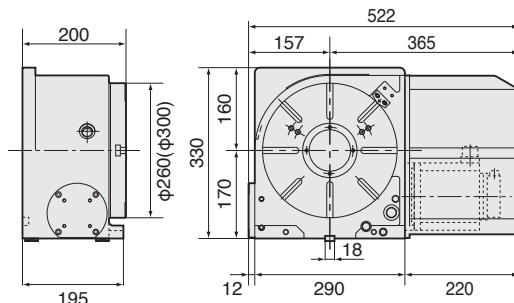



(): Figures is for CNC302, CNCZ302.

CNC260P, CNC302P

NEW

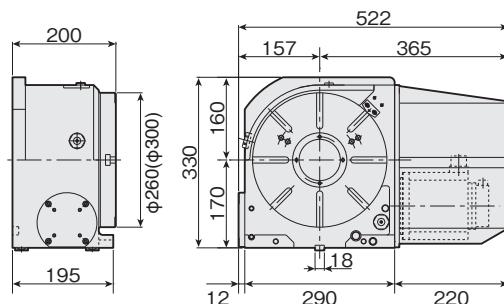




Powerful Clamping Torque: 1430N·m



(): Figures is for CNC302P.

Air purge function is provided inside the motor cover as standard.

CNC321, CNCZ321

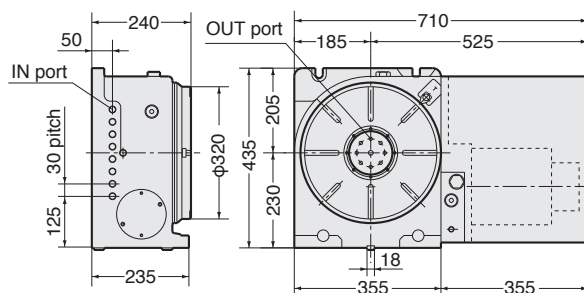

Rotary joint shown in layout is optional.

CNC401, CNCZ401

Rotary joint shown in photo & layout is optional.

