



日研 正面フライスアーバ

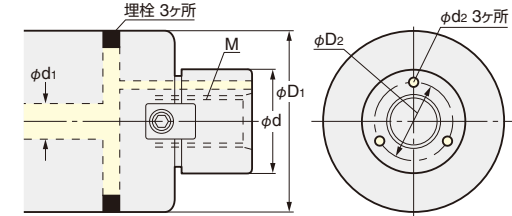

■ オイルホール付カッタ用
高送りカッタ用

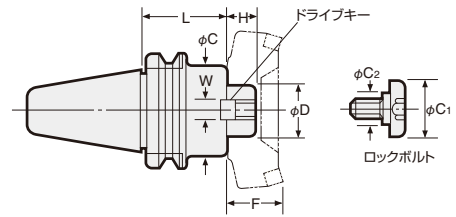

Code No.	カッタ径	φd	φD1	M	クーラント穴		
					φD2	φd1	φd2
FMH22.225	φ50, φ52	22.225	47 60	M10×1.5	16	6~8	3
	φ63, φ66						
FMH25.4	φ80	25.4	70	M12×1.75	18.5	8~10	3.5
FMH31.75	φ100	31.75	76,96	M16×2.0	24	10~13	4
FMH38.1	φ125	38.1	100	M20×2.5	29	10~15	5
FMH50.8	φ160	50.8	100	M24×3.0	37.5	15~20	7

★取付部は基本的にFMA/FMCに準じます。 ★カッタ径はこの他の組合せもあります。

FMH インチシリーズ


テーパ	Code No.	アーバ寸法						ドライブキー	ロックボルト	Gキャップボルト	重量 (kg)
		D	L	H	C	C1	W				
No.40	BT40-FMH22.225- 47- 45	22.225	45	17	47	28	8	FW 3	FM10	-	1.3
	- 60		60								1.5
	- 90		90								1.9
	-150		150								2.7
	-FMH22.225- 60- 45	22.225	45	17	60	28	8	FW 3	FM10	-	1.5
	- 60		60								1.8
	- 90		90								2.5
	-FMH25.4 - 70- 60	25.4	60	22	70	33	9.5	FW 5	FM12	-	2.0
	- 90		90								2.7
	-105		105								3.1
	-FMH31.75 - 76- 60	31.75	60	30	76	40	12.7	FW13	FM16	-	2.2
	- 90		90								2.9
-FMH31.75 - 96- 60	60		30								96
No.50	BT50-FMH22.225- 47- 60	22.225	60	17	47	28	8	FW 3	FM10	-	4.1
	-105		105								4.7
	-150		150								5.3
	-200		200								6.0
	-250		250								6.6
	-300		300								7.7
	-350	350	8.9								
	-FMH22.225- 60- 60	22.225	60	17	60	28	8	FW 3	FM10	-	4.2
	-105		105								5.2
	-150		150								6.2
	-200		200								7.4
	-250		250								8.5
	-300		300								9.6
	-350	350	10.6								
	-FMH25.4 - 70- 45	25.4	45	22	70	33	9.5	FW 5	FM12	-	4.0
	- 60		60								4.5
	- 90		90								5.4
	-150		150								7.2
	-200		200								8.7
	-250		250								10.3
	-300	300	11.8								
	-FMH31.75 - 76- 45	31.75	45	30	76	40	12.7	FW12	FM16	-	4.1
	- 75		75					5.2			
	-105		105					6.3			
	-150		150					7.9			
	-200		200					9.7			
	-250		250					11.6			
	-300	300	13.4								
	-FMH31.75 - 96- 45	31.75	45	30	96	40	12.7	FW13	FM16	-	4.3
	- 75		75								6.0
	-105		105								7.7
	-150		150								10.3
	-200		200								13.1
	-250		250								16.4
	-300	300	19.2								
	-FMH38.1 -100- 45	38.1	45	34	100	50	15.9	FW19	FM20	-	4.4
- 75	75		6.3								
-105	105		8.1								
-150	150		10.9								
-200	200		14.5								
-250	250		17.5								
-300	300	20.5									
-FMH50.8 -100- 45	50.8	45	36	100	65	19	FW23	FM24	-	4.4	

★キー・Lレンチ及びボルト付です。
★重量はアーバのみ、カッタは含みません。


日研 正面フライスアーバ



■ オイルホール付カッタ用
高送りカッタ用

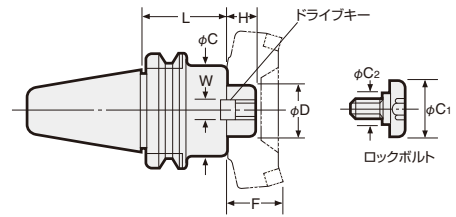

FMH

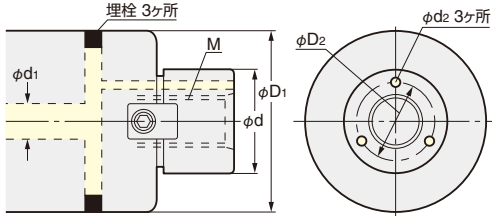

Code No.	カッタ径	φd	φD1	M	クーラント穴		
					φD2	φd1	φd2
FMH16	φ40	16	37	M8×1.25	12	6	2
FMH22	φ50, φ52	22	47	M10×1.5	16	6~8	3
	φ63, φ66		60				
FMH27	φ80	27	60,76	M12×1.75	18.5	8~10	3.5
FMH32	φ100	32	96	M16×2.0	24	10~13	4
FMH40	φ125	40	100	M20×2.5	29	10~15	5

★取付部は基本的にFMA/FMCに準じます。 ★カッタ径はこの他の組合せもあります。

FMH ミリシリーズ

テーパ	Code No.	アーバ寸法						ドライブキー	ロックボルト	Gキャップボルト	重量 (kg)
		D	L	H	C	C1	W				
No.30	BT30-FMH16- 37 - 35	16	35	17	37	20	8	FW 3	FM 8	—	0.56
	-FMH22- 47 - 45	22	45	18	47	16	10	FW 8	—	M10×30	0.76
	-FMH27- 60 - 45	27	45	20	60	18	12	FW11	—	M12×35	0.91
No.40	BT40-FMH16- 37 - 40	16	40	17	37	20	8	FW 3	FM 8	—	1.1
	-FMH22- 47 - 45		45	1.3							
	- 60	22	60	18	47	16	10	FW 8	—	M10×30	1.5
	- 90		90								1.9
	-150		150								2.7
	-FMH22- 60 - 45	22	45	18	60	16	10	FW 8	—	M10×30	1.5
	- 60		60								1.8
	- 90		90								2.5
	-FMH27- 60 - 45	27	45	20	60	18	12	FW11	—	M12×35	1.5
	- 60		60								1.8
	- 90		90								2.5
	-FMH27- 76 - 60	27	60	20	76	18	12	FW11	—	M12×35	2.1
- 90	90		2.8								
-FMH32- 96 - 60	32	60	22	96	24	14	FW16	—	M16×35	2.4	
No.50	BT50-FMH16- 37 - 60	16	60	17	37	20	8	FW 3	FM 8	—	3.8
	-105		105								4.1
	-150		150								4.5
	-200		200								4.9
	-FMH22- 47 - 60	22	60	18	47	16	10	FW 8	—	M10×30	4.1
	-105		105								4.7
	-150		150								5.3
	-200		200								6.0
	-250		250								6.7
	-300		300								7.8
	-350	350	8.9								
	-FMH22- 60 - 60	22	60	18	60	16	10	FW 8	—	M10×30	4.2
	-105		105								5.2
	-150		150								6.3
	-200		200								7.4
	-250		250								8.5
	-300		300								9.6
	-350	350	10.7								
	-FMH27- 60 - 45	27	45	20	60	18	12	9FWE27	—	M12×35	3.9
	- 90		90					5.0			
	-150		150					6.3			
	-200		200					7.4			
	-250		250					8.5			
	-300		300					9.6			
	-FMH27- 76 - 45	27	45	20	76	18	12	FW10	—	M12×35	4.0
	- 90		90					5.6			
	-150		150					7.8			
	-200		200					9.7			
	-250		250					11.4			
	-300		300					13.2			
-FMH32- 96 - 45	32	45	22	96	24	14	FW15	—	M16×35	4.2	
- 90		90					6.8				
-150		150					10.2				
-200		200					13.3				
-250		250					16.1				
-300		300					19.0				
-FMH40-100 - 45	40	45	26	100	50	16	FW20	FM20	—	4.4	
- 75		75					6.2				
-105		105					8.1				

★キー・Lレンチ及びボルト付です。
★重量はアーバのみ、カッタは含まれません。