


MDQ

Photo shows with A1 spacer and ZMAC-V head.


TAPER	Code No.	Q	L	C	C1	H	Weight (kg)	ZMAC-V Boring Range	Fig
No.30	NBT30-MDQ26- 60	26	60	50	50	37.5	-	16~70	1
No.40	NBT40-MDQ26- 65	26	65	50	54	30.0	1.3	16~70	2
No.50	NBT50-MDQ26- 80	26	80	50	87	22.0	4.6	16~70	2
	-MDQ34- 90	34	90	64	87	32.0	4.9	16~85	
	-MDQ42-100	42	100	83	87	45.0	5.7	16~180	

- ★All base holders are used for centre through tool coolant.
- ★Coupling bolt and wrench are supplied as standard.
- ★ZMAC-V head is recommended to use with the MAJOR DREAM base holder for anti-vibration.
- ★When L length is required longer than standard, please specify the boring depth M and Q No.



MODULAR TYPE STRAIGHT SHANK

K-Q

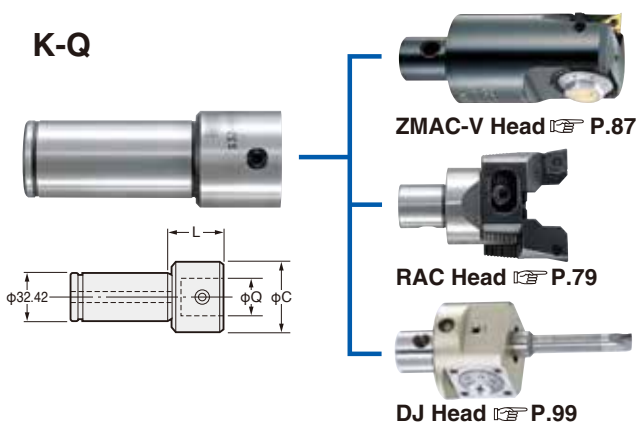

Code No.	Coupling Dia.	C	L	Coupling Bolt.	Weight (Kg)
	Q				
K32-Q 9-20	9	19	20	B19	0.4
-40			40		0.5
-Q12-20	12	24	20	B12	0.4
-60			60		0.6
-Q16-20	16	31	20	B16	0.5
-55			55		0.7
-Q20-40	20	40	40	B20	0.7
-Q26-40	26	50		B26N	0.8
K42-Q26-40				B26N	1.2

★All straight shank base holders are used for centre through tool coolant.

CHANFERING CUTTER for Modular System

CAF



Code No.	Coupling Dia.	Chamfering Dia.	Code No.	Coupling Dia.	Chamfering Dia.
CAF 9- 32	9	20~32	CAF20- 60	20	42~60
CAF12- 38	12	25~38	CAF26- 85A	26	56~85
CAF16- 45	16	33~45	CAF34-110	34	70~110

★Chamfering angle is 45°